




DEXTER
LAUNDRY



DEXTER LAUNDRY
ON-PREMISE SOLUTIONS



DEXTER[®] LAUNDRY



OUR COMPANY



OUR PRODUCTS



OUR PROMISE



OUR INDUSTRIES



DISCOVER THE DEXTER DIFFERENCE

Since 1894, Dexter Laundry has been dedicated to helping people and companies around the world process laundry faster and more efficiently. We offer a full line of on-premise laundry solutions that you can depend on. Our state-of-the-art controls and management software puts you in control of your laundry, giving you the confidence to manage your business while we help manage your laundry. All of our products are designed, built, and assembled from start to finish in the USA at our Fairfield, Iowa headquarters.

Dexter Laundry products can be found in a variety of successful laundry environments worldwide. From hospitals to dairy farms, firehouses to battle ships, metropolitan cities to remote villages, our products can handle it all. Laundry managers in these locations know from experience that Dexter washers and dryers are engineered to show-up cycle after cycle, year after year, even in the harshest laundry environments.

Our relationship doesn't end once the sale is complete. As an employee-owned company, we stand behind every machine we build because we are passionate about creating the best laundry ownership experience possible. Every Dexter machine is backed by industry-leading warranties and free lifetime technical support. We are proud to partner with our Dexter Authorized Distributors worldwide to ensure you receive the best service possible.



DEXTER LAUNDRY ON-PREMISE PRODUCT DETAILS



WASHER PRODUCT DETAILS

DRYER PRODUCT DETAILS



DURABLE & RELIABLE

- Heavy duty bearings in a cast iron bearing housing
- Welded steel spider & shaft
- Designed to withstand 1,000 hour out-of-balance test
- Stainless steel tub, cylinder, top, front, & sides
- Industry-leading warranties
- Lifetime technical support

EFFICIENT

- Perforated cylinders & raised baffles create superior wash action
- Efficient washer design
- Automatic Chemical Injection
- Available in 100G - 400G extract

FLEXIBLE

- 0-Series or 6-Cycle controls
- Easy programming with DexterLive
- Electronic Pressure Sensor
- Hardmount or softmount options available

INSTALLATION

- Adjustable final extract speeds
- Most fit through a standard 36" doorway
- Most can be installed with single or triple phase power

OPTIONS

- 0-Series available in Express or Express Plus extraction
- 6-Cycle controls available in 100G or 200G
- Electric heat & steam heat options available



DURABLE & RELIABLE

- Heavy duty bearings in a cast iron bearing housing
- Welded steel spider
- Tumbler baffles provide great tumbling action
- Fire Response System
- Industry-leading warranties
- Lifetime technical support

EFFICIENT

- Moisture Detection System
- Perforated tumblers
- Balanced radial airflow
- Anti-wrinkle feature

FLEXIBLE

- 0-Series or 6-Cycle controls
- Easy programming with DexterLive
- Reversible door option

INSTALLATION

- Vertical exhaust & venting come standard on all dryers
- Easily accessible exhaust clean outs
- Lower service door access makes lint screen cleaning easy & quick

OPTIONS

- Stainless or galvanized tumblers
- 6-Cycle or 0-Series controls
- Gas or electric models
- Reversing model options



TOTAL CONTROL WITH O-SERIES

THE PRECISION YOU NEED TO GET YOUR LAUNDRY DONE RIGHT.



ULTIMATE FLEXIBILITY

With the ability to program 100 unique cycles comprised of up to 20 distinct stages with many setting options, our controls offer the flexibility and precision you need to ensure your laundry is handled properly.



MOISTURE DETECTION SYSTEM

Our patented moisture detection system with wireless sensing technology takes the guess-work out of drying. Each auto dry cycle automatically stops when the load is dry, increasing throughput and reducing linen wear.




FIRE RESPONSE SYSTEM

All O-Series dryers offer the added safety of our Fire Response System by automatically sensing when a load is unexpectedly increasing in temperature. Water-based Fire Response models are also available.



EASY PROGRAMMING WITH DEXTERLIVE

DexterLive.com makes it easier than ever to program your controls and manage your laundry. This free web application allows you to create and adjust all of your cycle settings. Your settings can then be downloaded and copied to your machines via USB.

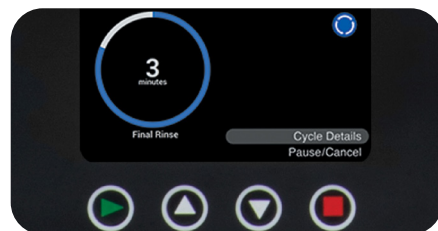

SPECIALTY CYCLES & APPLICATIONS

Our controls can be programmed for special cycles, such as ultra-delicate for wet cleaning. Plus, for applications where precision is critical, we offer heated washers that give real-time temperature feedback to ensure every load reaches its target temperature.

WHICH CONTROL IS RIGHT FOR YOU?

WASHER CONTROL COMPARISON

	6-CYCLE	O-SERIES
MODEL CONFIGURATIONS		
200G EXPRESS EXTRACT	X	X
300-400G EXPRESS PLUS EXTRACT		X
HEATED WATER OPTION (AVAILABILITY VARIES BY MODEL)		X
CONTROL PROGRAMMING		
PROGRAMMABLE CYCLES	6	100
PROGRAMMABLE STAGES	8	20
CHEMICAL INJECTION PORTS	4	10
SOAK OPTION		X
MULTIPLE AGITATION OPTIONS		X
DELAYED START		X
PROGRAMMABLE SPIN SPEEDS		X
DEXTERLIVE PROGRAMMING		X
CONTROL DISPLAY		
DISPLAY TYPE	SEGMENTED	FULL COLOR
MULTI-LINGUAL		X
PRODUCTIVITY REPORTING		X
TEMPERATURE RECORDING (AVAILABILITY VARIES BY MODEL)		X

DRYER CONTROL COMPARISON

	6-CYCLE	O-SERIES
MODEL CONFIGURATIONS		
REVERSING TUMBLERS (AVAILABILITY VARIES BY MODEL)	X	X
MOISTURE DETECTION SYSTEM		X
FIRE RESPONSE SYSTEM		X
WATER-BASED FIRE RESPONSE SYSTEM		X
CONTROL PROGRAMMING		
PROGRAMMABLE CYCLES	6	100
PROGRAMMABLE STAGES	2	20
NO HEAT OPTION	X	X
PROGRAMMABLE REVERSING DELAY		X
DEXTERLIVE PROGRAMMING		X
CONTROL DISPLAY		
DISPLAY TYPE	SEGMENTED	FULL COLOR
MULTI-LINGUAL		X
PRODUCTIVITY REPORTING		X



GAIN ULTIMATE PERFORMANCE & FLEXIBILITY WITH THE SOFTMOUNT LINE



Gain **TOTAL CONTROL** of your laundry operation with our Express Plus Softmount Washer Line! Designed with a rugged internal suspension system, these washers can be installed in locations where traditional hardmount machines can't. The flexible design reduces installation time without sacrificing the quality you expect from Dexter.

Built to last, 0-Series controls offer 100 customizable cycles and management tools to minimize downtime and optimize efficiency. Available in 40 lb and 60 lb options, our softmount washers deliver the performance, flexibility, and durability you need. Plus, they're Made in the USA and come with an industry-leading warranty and free lifetime technical support.

EXPRESS PLUS 0-SERIES SOFTMOUNT WASHERS High Extract | Ultimate Flexibility



S-675
40 lb (18.1 kg)



S-975
60 lb (27.2 kg)

		S-675		S-975	
Capacity	Dry Weight Capacity - lb (kg)	40	(18.1)	60	(27.2)
	Cylinder Volume - cu ft (L)	6	(170)	9	(254.9)
Speed	Maximum Extract Speed - g (RPM)	400	(1061)	400	(969)
	Motor Size - hp (kW)	3	(2.2)	6.7	(5)
Dimensions	Cabinet Height - in (cm)	52 9/16	(133.5)	58	(147.3)
	Cabinet Width - in (cm)	33	(83.8)	38 1/4	(97.2)
	Cabinet Depth - in (cm)	40	(101.6)	43	(109.2)
	Door Opening - in (cm)	15 1/4	(38.7)	19 1/4	(48.9)
	Floor to Door Bottom - in (cm)	19 5/16	(50.7)	21 3/8	(54.4)
	Cylinder Diameter - in (cm)	25	(63.5)	30	(76.2)
	Cylinder Depth - in (cm)	21 1/8	(53.7)	22	(55.9)
Weight	Net Weight - lb (kg)	902	(409.1)	1250	(567)
	Shipping Weight - lb (kg)	952	(431.8)	1300	(589.7)
Shipping	Shipping Height - in (cm)	58 3/4	(149.2)	64 1/4	(163.2)
	Shipping Width - in (cm)	34 3/4	(88.3)	40	(101.6)
	Shipping Depth - in (cm)	50	(127)	50	(127)
	Water Inlet Size - in (mm)	3/4	(19)	3/4	(19)
Water	Pressure (min/max) - psi (kPa)	30-120	(207-827)	30-120	(207-827)
	Flow Rate - gal/min (L/min)	9	(34)	9 & 12	(34 & 45)
	Drain Diameter (O.D.) - in (cm)	3	(7.6)	3	(7.6)
	Floor to Center of Drain - in (cm)	4 1/8	(10.5)	4 1/8	(10.5)
	Electrical	Model	Volts / Hz / Phase / Wiring		Circuit Breaker Amps / Running Amps / Wire Size
-12		208-240 / 60 / 1 / 2 wire + ground		15 / 10 / #12	30 / 15 / #10
		208-240 / 60 / 3 / 3 wire + ground			
-39		230 / 50 / 1 / 2 wire + ground		15 / 10 / 3.5 mm ²	30 / 15 / 5.3 mm ²
Installation	Min. Clearance Between Machines - in (cm)	1/2	(1.3)	1/2	(1.3)
	Min. Clearance Behind Machines - in (cm)	24	(61)	24	(61)

6-CYCLE WASHERS Built to Last | Energy Efficient | 10-Year Warranty



T-300 20 lb (9.1 kg) **T-400** 30 lb (13.6 kg) **T-600** 40 lb (18.1 kg) **T-900** 60 lb (27.2 kg) **T-1200** 80 lb (36.3 kg)
Front Soapbox Option

EXPRESS 6-CYCLE WASHERS Built to Last | High Extract | 10-Year Warranty



T-350 20 lb (9.1 kg) **T-450** 30 lb (13.6 kg) **T-650** 40 lb (18.1 kg) **T-750** 50 lb (22.7 kg) **T-950** 60 lb (27.2 kg) **T-1450** 90 lb (40.8 kg)
Front Soapbox Option

EXPRESS DRYERS Built to Last | Superior Performance | 5-Year Warranty



T-20x2 2 x 20 lb (2 x 9.1 kg) **T-30x2** 2 x 30 lb (2 x 13.6 kg) **T-50x2** 2 x 50 lb (2 x 22.7 kg)
Reversing Option **T-30** 30 lb (13.6 kg) **T-50** 50 lb (22.7 kg)
Reversing Option **T-80** 80 lb (36.3 kg)
Reversing Option **T-120** 120 lb (54.4 kg)
Reversing **T-170** 170 lb (77.1 kg)
Reversing

EXPRESS 0-SERIES WASHERS Total Control | High Extract | Ultimate Flexibility | 10-Year Warranty



T-350 20 lb (9.1 kg) **T-450** 30 lb (13.6 kg) **T-650** 40 lb (18.1 kg)
Electric & Steam Heat Options
Express Plus Option **T-750** 50 lb (22.7 kg) **T-950** 60 lb (27.2 kg)
Electric & Steam Heat Options
Express Plus Option **T-1450** 90 lb (40.8 kg)
Electric & Steam Heat Options
Express Plus Option
Front Soapbox Option

EXPRESS STACK WASHER-DRYERS Built to Last | Superior Performance



T-350 STACK WASHER-DRYER
WASHER: 20 lb (9.1 kg)
DRYER: 20 lb (9.1 kg) **T-450 STACK WASHER-DRYER**
WASHER: 30 lb (13.6 kg)
DRYER: 30 lb (13.6 kg) **T-750 STACK WASHER-DRYER**
WASHER: 50 lb (22.7 kg)
DRYER: 50 lb (22.7 kg)
Reversing

EXPRESS 0-SERIES DRYERS Total Control | Moisture Detection | Fire Response | 5-Year Warranty



T-30 30 lb (13.6 kg) **T-50** 50 lb (22.7 kg)
Reversing Option **T-80** 80 lb (36.3 kg)
Reversing Option **T-120** 120 lb (54.4 kg)
Reversing **T-170** 170 lb (77.1 kg)
Reversing

EXPRESS O-SERIES WASHER SPECIFICATIONS

		T-350	T-450	T-650	T-750	T-950	T-1450	
Capacity	Dry Weight Capacity - lb (kg)	20 (9.1)	30 (13.6)	40 (18.1)	50 (22.7)	60 (27.2)	90 (40.8)	
	Cylinder Volume - cu ft (L)	2.7 (76.5)	3.8 (107.6)	6 (170)	6.5 (184.1)	9 (254.9)	13.7 (388)	
Speed	Maximum Extract Speed - g (RPM)	200 (819)	200 (750)	200 (750)	200 (685)	200 (685)	200 (617)	
	Motor Size - hp (kW)	1 (0.75)	2 (1.5)	2 (1.5)	3 (2.2)	3 (2.2)	7.8 (5.8)	
Dimensions	Cabinet Height - in (cm)	43 7/8 (111.4)	48 3/16 (122.4)	53 (134.6)	55 3/8 (140.7)	55 3/8 (140.7)	62 3/8 (158.4)	
	Cabinet Width - in (cm)	26 (66)	29 7/8 (75.9)	29 7/8 (75.9)	34 3/8 (87.3)	34 3/8 (87.3)	41 1/2 (105.4)	
	Cabinet Depth - in (cm)	28 (71.1)	28 1/4 (71.8)	38 1/8 (96.8)	32 7/8 (83.5)	38 7/8 (98.7)	42 1/4 (107.3)	
	Door Opening - in (cm)	12 1/4 (31.1)	15 1/4 (38.7)	15 1/4 (38.7)	19 1/4 (48.9)	19 1/4 (48.9)	19 1/4 (48.9)	
	Floor to Door Bottom - in (cm)	14 7/8 (37.8)	16 1/4 (41.3)	16 1/4 (41.3)	16 (40.6)	16 (40.6)	19 5/16 (49.1)	
	Cylinder Diameter - in (cm)	21 (53.3)	25 (63.5)	25 (63.5)	30 (76.2)	30 (76.2)	37 (94)	
	Cylinder Depth - in (cm)	13 1/2 (34.3)	13 3/8 (34)	21 1/8 (53.7)	16 (40.6)	22 (55.9)	22 (55.9)	
Weight	Net Weight - lb (kg)	383 (173.7)	526 (238.6)	744 (337.5)	925 (419.6)	1000 (453.6)	1322 (599.6)	
Shipping	Shipping Weight - lb (kg)	407 (184.6)	544 (246.8)	766 (347.5)	952 (431.8)	1016 (460.8)	1364 (618.7)	
	Shipping Height - in (cm)	49 1/4 (125.1)	53 1/4 (135.3)	58 3/4 (149.2)	61 1/2 (156.2)	61 1/2 (156.2)	69 1/4 (175.9)	
	Shipping Width - in (cm)	28 1/4 (71.8)	31 1/2 (80)	31 1/2 (80)	36 (91.4)	36 (91.4)	43 1/8 (109.5)	
	Shipping Depth - in (cm)	33 1/2 (85.1)	33 1/2 (85.1)	43 3/4 (111.1)	38 (96.5)	45 1/4 (114.9)	48 (121.9)	
Water	Water Inlet Size - in (mm)	3/4 (19)	3/4 (19)	3/4 (19)	3/4 (19)	3/4 (19)	3/4 (19)	
	Pressure (min/max) - psi (kPa)	30-120 (207-827)	30-120 (207-827)	30-120 (207-827)	30-120 (207-827)	30-120 (207-827)	30-120 (207-827)	
	Flow Rate - gal/min (L/min)	9 (34)	9 (34)	9 (34)	9 (34)	9 & 12 (34 & 45)	9 & 12 (34 & 45)	
	Drain Diameter (O.D.) - in (cm)	2 1/4 (5.7)	3 (7.6)	3 (7.6)	3 (7.6)	3 (7.6)	3 (7.6)	
	Floor to Center of Drain - in (cm)	6 (15.2)	5 (12.7)	6 7/8 (17.5)	6 5/8 (16.8)	6 5/8 (16.8)	8 5/16 (21.1)	
Electrical	Model	Volts / Hz / Phase / Wiring	Circuit Breaker Amps / Running Amps / Wire Size					
	-12	208-240 / 60 / 1 / 2 wire + ground	15 / 6.2 / #12	15 / 6.2 / #12	15 / 6.2 / #12	20 / 8.4 / #12	20 / 12 / #12	30 / 15 / #10
		208-240 / 60 / 3 / 3 wire + ground						
	-13	208-240 / 60 / 3 / 3 wire + ground	---	---	40 / 40 / #8	---	60 / 60 / #6	60 / 60 / #4
	-39	230 / 50 / 1 / 2 wire + ground	15 / 6.2 / 3.5 mm ²	15 / 6.2 / 3.5 mm ²	15 / 6.2 / 3.5 mm ²	20 / 8.4 / 3.5 mm ²	20 / 12 / 3.5 mm ²	30 / 15 / 5.3 mm ²
-68	400 / 50 / 3 / 4 wire + ground	---	---	30 / 30 / 8.4 mm ²	---	40 / 40 / 8.4 mm ²	---	
Installation	Min. Clearance Between Machines - in (cm)	1/2 (1.3)	1/2 (1.3)	1/2 (1.3)	1/2 (1.3)	1/2 (1.3)	1/2 (1.3)	
	Min. Clearance Behind Machines - in (cm)	24 (61)	24 (61)	24 (61)	24 (61)	24 (61)	24 (61)	
	Min. Concrete Thickness - in (cm)	6 (15.2)	6 (15.2)	8 (20.3)	8 (20.3)	8 (20.3)	12 (30.5)	
Options	Controls	O-Series	O-Series	O-Series	O-Series	O-Series	O-Series	
	Other Features & Options	---	---	---	---	---	Front Soapbox	

EXPRESS PLUS O-SERIES WASHER SPECIFICATIONS

		T-675	T-975	T-1475
Capacity	Dry Weight Capacity - lb (kg)	40 (18.1)	60 (27.2)	90 (40.8)
	Cylinder Volume - cu ft (L)	6 (170)	9 (254.9)	13.7 (388)
Speed	Maximum Extract Speed - g (RPM)	300 (919)	400 (969)	300 (756)
	Motor Size - hp (kW)	3 (2.2)	6.7 (5)	7.8 (5.8)
Dimensions	Cabinet Height - in (cm)	53 (134.6)	55 3/8 (140.7)	62 3/8 (158.4)
	Cabinet Width - in (cm)	29 7/8 (75.9)	34 3/8 (87.3)	41 1/2 (105.4)
	Cabinet Depth - in (cm)	38 1/8 (96.8)	38 7/8 (98.7)	42 1/4 (107.3)
	Door Opening - in (cm)	15 1/4 (38.7)	19 1/4 (48.9)	19 1/4 (48.9)
	Floor to Door Bottom - in (cm)	16 1/4 (41.3)	16 (40.6)	19 5/16 (49.1)
	Cylinder Diameter - in (cm)	25 (63.5)	30 (76.2)	37 (94)
	Cylinder Depth - in (cm)	21 1/8 (53.7)	22 (55.9)	22 (55.9)
Weight	Net Weight - lb (kg)	744 (337.5)	1000 (453.6)	1322 (599.6)
Shipping	Shipping Weight - lb (kg)	766 (347.5)	1016 (460.8)	1364 (618.7)
	Shipping Height - in (cm)	58 3/4 (149.2)	61 1/2 (156.2)	69 1/4 (175.9)
	Shipping Width - in (cm)	31 1/2 (80)	36 (91.4)	43 1/8 (109.5)
	Shipping Depth - in (cm)	43 3/4 (111.1)	45 1/4 (114.9)	48 (121.9)
Water	Water Inlet Size - in (mm)	3/4 (19)	3/4 (19)	3/4 (19)
	Pressure (min/max) - psi (kPa)	30-120 (207-827)	30-120 (207-827)	30-120 (207-827)
	Flow Rate - gal/min (L/min)	9 (34)	9 & 12 (34 & 45)	9 & 12 (34 & 45)
	Drain Diameter (O.D.) - in (cm)	3 (7.6)	3 (7.6)	3 (7.6)
	Floor to Center of Drain - in (cm)	6 7/8 (17.5)	6 5/8 (16.8)	8 5/16 (21.1)
Electrical	Model	Volts / Hz / Phase / Wiring	Circuit Breaker Amps / Running Amps / Wire Size	
	-12	208-240 / 60 / 1 / 2 wire + ground	15 / 10 / #12	30 / 15 / #10
		208-240 / 60 / 3 / 3 wire + ground		
	-39	230 / 50 / 1 / 2 wire + ground	15 / 10 / 3.5 mm ²	30 / 15 / 5.3 mm ²
Installation	Min. Clearance Between Machines - in (cm)	1/2 (1.3)	1/2 (1.3)	1/2 (1.3)
	Min. Clearance Behind Machines - in (cm)	24 (61)	24 (61)	24 (61)
	Min. Concrete Thickness - in (cm)	8 (20.3)	8 (20.3)	12 (30.5)
Options	Controls	O-Series	O-Series	O-Series
	Other Features & Options	---	---	Front Soapbox

6-CYCLE WASHER SPECIFICATIONS

		T-300	T-400	T-600	T-900	T-1200	
Capacity	Dry Weight Capacity - lb (kg)	20 (9.1)	30 (13.6)	40 (18.1)	60 (27.2)	80 (36.3)	
	Cylinder Volume - cu ft (L)	2.7 (76.5)	4 (113.3)	6 (170)	9 (254.9)	11.5 (325.6)	
Speed	High Extract Speed - g (RPM)	100 (579)	100 (532)	100 (532)	100 (485)	100 (485)	
	Motor Size - hp (kW)	1 (0.75)	2 (1.5)	2 (1.5)	3 (2.2)	3 (2.2)	
Dimensions	Cabinet Height - in (cm)	43 7/8 (111.4)	48 3/16 (122.4)	49 11/16 (126.2)	55 3/8 (140.7)	57 7/8 (147)	
	Cabinet Width - in (cm)	26 (66)	29 7/8 (75.9)	29 7/8 (75.9)	34 3/8 (87.3)	34 3/8 (87.3)	
	Cabinet Depth - in (cm)	25 (63.5)	27 3/8 (69.5)	36 (91.4)	38 7/8 (98.8)	45 3/8 (115.3)	
	Door Opening - in (cm)	12 1/4 (31.1)	15 1/4 (38.7)	15 1/4 (38.7)	19 1/4 (48.9)	19 1/4 (48.9)	
	Floor to Door Bottom - in (cm)	14 7/8 (37.8)	16 1/4 (41.3)	16 1/4 (41.3)	16 (40.6)	18 1/2 (47)	
	Cylinder Diameter - in (cm)	21 (53.3)	25 (63.5)	25 (63.5)	30 (76.2)	30 (76.2)	
	Cylinder Depth - in (cm)	13 1/2 (34.3)	14 1/8 (35.9)	21 1/8 (53.7)	22 (55.9)	28 (71.1)	
Weight	Net Weight - lb (kg)	317 (143.8)	432 (196)	558 (253.1)	964 (437.3)	1022 (463.6)	
Shipping	Shipping Weight - lb (kg)	340 (154.2)	450 (204.1)	580 (263.1)	980 (444.5)	1063 (482.2)	
	Shipping Height - in (cm)	50 (127)	53 1/4 (135.3)	54 3/4 (139.1)	61 1/2 (156.2)	63 3/4 (161.9)	
	Shipping Width - in (cm)	27 1/4 (69.2)	31 1/2 (80)	31 1/2 (80)	36 (91.4)	36 (91.4)	
	Shipping Depth - in (cm)	30 1/2 (77.5)	33 1/2 (85.1)	41 (104.1)	44 1/4 (112.4)	52 3/16 (132.6)	
Water	Water Inlet Size - in (mm)	3/4 (19)	3/4 (19)	3/4 (19)	3/4 (19)	3/4 (19)	
	Pressure (min/max) - psi (kPa)	30-120 (207-827)	30-120 (207-827)	30-120 (207-827)	30-120 (207-827)	30-120 (207-827)	
	Flow Rate - gal/min (L/min)	9 (34)	9 (34)	9 (34)	9 (34)	9 & 12 (34 & 45)	
	Drain Diameter (O.D.) - in (cm)	2 1/4 (5.7)	3 (7.6)	3 (7.6)	3 (7.6)	3 (7.6)	
	Floor to Center of Drain - in (cm)	6 (15.2)	4 11/16 (11.9)	5 (12.7)	6 5/8 (16.8)	8 5/8 (21.8)	
Electrical	Model	Volts / Hz / Phase / Wiring	Circuit Breaker Amps / Running Amps / Wire Size				
	-10	120 / 60 / 1 / 2 wire + ground	20 / 13 / #12	---	---	---	
	-12	208-240 / 60 / 1 / 2 wire + ground	15 / 4 / #12	15 / 6.2 / #12	15 / 6.2 / #12	20 / 8.4 / #12	20 / 8.4 / #12
		208-240 / 60 / 3 / 3 wire + ground					
	-39	230 / 50 / 1 / 2 wire + ground	15 / 4 / 3.5 mm ²	15 / 6.2 / 3.5 mm ²	15 / 6.2 / 3.5 mm ²	20 / 8.4 / 3.5 mm ²	20 / 8.4 / 3.5 mm ²
-59	230 / 50 / 1 / 2 wire + ground	15 / 4 / 3.5 mm ²	15 / 6.2 / 3.5 mm ²	15 / 6.2 / 3.5 mm ²	20 / 8.4 / 3.5 mm ²	---	
Installation	Min. Clearance Between Machines - in (cm)	1/2 (1.3)	1/2 (1.3)	1/2 (1.3)	1/2 (1.3)	1/2 (1.3)	
	Min. Clearance Behind Machines - in (cm)	24 (61)	24 (61)	24 (61)	24 (61)	24 (61)	
	Min. Concrete Thickness - in (cm)	6 (15.2)	6 (15.2)	6 (15.2)	8 (20.3)	8 (20.3)	
Options	Controls	6-Cycle Only	6-Cycle Only	6-Cycle Only	6-Cycle Only	6-Cycle Only	
	Other Features & Options	---	---	---	---	Front Soapbox	

EXPRESS 6-CYCLE WASHER SPECIFICATIONS

		T-350	T-450	T-650	T-750	T-950	T-1450
Capacity	Dry Weight Capacity - lb (kg)	20 (9.1)	30 (13.6)	40 (18.1)	50 (22.7)	60 (27.2)	90 (40.8)
	Cylinder Volume - cu ft (L)	2.7 (76.5)	3.8 (107.6)	6 (170)	6.5 (184.1)	9 (254.9)	13.7 (388)
Speed	High Extract Speed - g (RPM)	200 (819)	200 (750)	200 (750)	200 (685)	200 (685)	200 (617)
	Motor Size - hp (kW)	1 (0.75)	2 (1.5)	2 (1.5)	3 (2.2)	3 (2.2)	7.8 (5.8)
Dimensions	Cabinet Height - in (cm)	43 7/8 (111.4)	48 3/16 (122.4)	53 (134.6)	55 3/8 (140.7)	55 3/8 (140.7)	62 3/8 (158.4)
	Cabinet Width - in (cm)	26 (66)	29 7/8 (75.9)	29 7/8 (75.9)	34 3/8 (87.3)	34 3/8 (87.3)	41 1/2 (105.4)
	Cabinet Depth - in (cm)	28 (71.1)	28 1/4 (71.8)	38 1/8 (96.8)	32 7/8 (83.5)	38 7/8 (98.7)	42 1/4 (107.3)
	Door Opening - in (cm)	12 1/4 (31.1)	15 1/4 (38.7)	15 1/4 (38.7)	19 1/4 (48.9)	19 1/4 (48.9)	19 1/4 (48.9)
	Floor to Door Bottom - in (cm)	14 7/8 (37.8)	16 1/4 (41.3)	16 1/4 (41.3)	16 (40.6)	16 (40.6)	19 5/16 (49.1)
	Cylinder Diameter - in (cm)	21 (53.3)	25 (63.5)	25 (63.5)	30 (76.2)	30 (76.2)	37 (94)
	Cylinder Depth - in (cm)	13 1/2 (34.3)	13 3/8 (34)	21 1/8 (53.7)	16 (40.6)	22 (55.9)	22 (55.9)
Weight	Net Weight - lb (kg)	383 (173.7)	526 (238.6)	744 (337.5)	925 (419.6)	1000 (453.6)	1322 (599.6)
Shipping	Shipping Weight - lb (kg)	407 (184.6)	544 (246.8)	766 (347.5)	952 (431.8)	1016 (460.8)	1364 (618.7)
	Shipping Height - in (cm)	49 1/4 (125.1)	53 1/4 (135.3)	58 3/4 (149.2)	61 1/2 (156.2)	61 1/2 (156.2)	69 1/4 (175.9)
	Shipping Width - in (cm)	28 1/4 (71.8)	31 1/2 (80)	31 1/2 (80)	36 (91.4)	36 (91.4)	43 1/8 (109.5)
	Shipping Depth - in (cm)	33 1/2 (85.1)	33 1/2 (85.1)	43 3/4 (111.1)	38 (96.5)	45 1/4 (114.9)	48 (121.9)
Water	Water Inlet Size - in (mm)	3/4 (19)	3/4 (19)	3/4 (19)	3/4 (19)	3/4 (19)	3/4 (19)
	Pressure (min/max) - psi (kPa)	30-120 (207-827)	30-120 (207-827)	30-120 (207-827)	30-120 (207-827)	30-120 (207-827)	30-120 (207-827)
	Flow Rate - gal/min (L/min)	9 (34)	9 (34)	9 (34)	9 (34)	9 & 12 (34 & 45)	9 & 12 (34 & 45)
	Drain Diameter (O.D.) - in (cm)	2 1/4 (5.7)	3 (7.6)	3 (7.6)	3 (7.6)	3 (7.6)	3 (7.6)
	Floor to Center of Drain - in (cm)	6 (15.2)	5 (12.7)	6 7/8 (17.5)	6 5/8 (16.8)	6 5/8 (16.8)	8 5/16 (21.1)
Electrical	Model	Volts / Hz / Phase / Wiring	Circuit Breaker Amps / Running Amps / Wire Size				
	-12	208-240 / 60 / 1 / 2 wire + ground	15 / 6.2 / #12	15 / 6.2 / #12	15 / 6.2 / #12	20 / 8.4 / #12	20 / 12 / #12
		208-240 / 60 / 3 / 3 wire + ground					
	-39	230 / 50 / 1 / 2 wire + ground	15 / 6.2 / 3.5 mm ²	15 / 6.2 / 3.5 mm ²	15 / 6.2 / 3.5 mm ²	20 / 8.4 / 3.5 mm ²	20 / 12 / 3.5 mm ²
	-59	230 / 50 / 1 / 2 wire + ground	15 / 6.2 / 3.5 mm ²	15 / 6.2 / 3.5 mm ²	15 / 6.2 / 3.5 mm ²	20 / 8.4 / 3.5 mm ²	---
Installation	Min. Clearance Between Machines - in (cm)	1/2 (1.3)	1/2 (1.3)	1/2 (1.3)	1/2 (1.3)	1/2 (1.3)	
	Min. Clearance Behind Machines - in (cm)	24 (61)	24 (61)	24 (61)	24 (61)	24 (61)	
	Min. Concrete Thickness - in (cm)	6 (15.2)	6 (15.2)	8 (20.3)	8 (20.3)	8 (20.3)	
Options	Controls	6-Cycle	6-Cycle	6-Cycle	6-Cycle	6-Cycle	
	Other Features & Options	---	---	---	---	Front Soapbox	

		T-30		T-50		T-80	
Capacity	Dry Weight Capacity - lb (kg)	30 (13.6)	50 (22.7)	80 (36.3)			
	Cylinder Volume - cu ft (L)	11.3 (320)	15.8 (447.4)	23 (651.3)			
Speed & Airflow	Tumbler Speed - RPM	47 ---	45 ---	40 ---			
	Motor Size - Non-Reversing - 60 Hz : 50 Hz - hp (kW)	0.5 : 0.5 (0.38 : 0.38)	1 : 0.75 (0.75 : 0.56)	1 : 0.75 (0.75 : 0.56)			
	Motor Size - Reversing - 60 Hz : 50 Hz - hp (kW)	--- ---	2 & 0.5 : --- (1.5 & 0.38 : ---)	1 & 0.75 : 1 & 0.75 (0.75 & 0.56 : 0.75 & 0.56)			
	Airflow 8" Outlet - 60 Hz : 50 Hz - cfm (M3/min)	830 : 690 (23.5 : 19.5)	910 : 760 (25.8 : 21.5)	1200 : 1000 (34 : 28.3)			
Dimensions & Weight	Cabinet Height - in (cm)	72 1/4 (183.5)	72 1/4 (183.5)	75 3/4 (192.4)			
	Cabinet Width - in (cm)	31 1/2 (80)	34 1/2 (87.6)	38 1/2 (97.8)			
	Cabinet Depth - Non-Reversing : Reversing - in (cm)	41 3/4 : --- (106) : ---	48 : 50 (121.9 : 127)	51 3/4 (131.4)			
	Door Opening - in (cm)	22 5/8 (57.5)	25 5/8 (65.1)	25 5/8 (65.1)			
	Floor to Door Bottom - in (cm)	28 3/4 (73)	27 1/4 (69.2)	29 1/4 (74.3)			
	Cylinder Diameter - in (cm)	30 (76.2)	32 1/2 (82.6)	36 1/2 (92.7)			
	Cylinder Depth - in (cm)	27 1/2 (69.9)	33 (83.8)	38 (96.5)			
	Lint Screen Area - sq in (sq cm)	515 (3323)	708 (4568)	823 (5310)			
	Net Weight - Non-Reversing : Reversing - lb (kg)	454 : --- (205.9) : ---	540 : 560 (244.9 : 254)	715 (324.3)			
Shipping	Shipping Weight - Non-Reversing : Reversing - lb (kg)	499 : --- (226.3) : ---	590 : 620 (267.6 : 281.2)	770 (349.3)			
	Shipping Height - in (cm)	77 1/4 (196.2)	77 1/4 (196.2)	80 3/4 (205.1)			
	Shipping Width - in (cm)	32 3/4 (83.2)	36 (91.4)	40 1/4 (102.2)			
	Shipping Depth - Non-Reversing : Reversing - in (cm)	45 1/2 (115.6)	51 1/2 : 53 1/2 (130.8 : 135.9)	55 1/2 (141)			
Gas	Gas Supply Connection - in (mm)	1/2 (12.7)	1/2 (12.7)	3/4 (19.1)			
	Natural Gas Supply (Water Column) - in (cm)	5-8 (12.7-20.3)	5-8 (12.7-20.3)	5-8 (12.7-20.3)			
	LP Gas Supply (Water Column) - in (cm)	11 1/2-13 1/2 (29.2-34.3)	11 1/2-13 1/2 (29.2-34.3)	11 1/2-13 1/2 (29.2 - 34.3)			
	Gas Usage - 60Hz : 50 Hz - BTU/hr (kW)	90,000 : 74,000 (26.4 : 21.7)	145,000 : 120,000 (42.5 : 35.2)	215,000 : 195,000 (63 : 57.1)			
Electrical	Gas Models	Volts / Hz / Phase / Wiring		Circuit Breaker Amps / Running Amps / Wire Size / Reversing Availability			
	-10	120 / 60 / 1 / 2 wire + ground				15 / 10.4 / #12 / Reversing	
	-11	208-240 / 60 / 1 / 2 wire + ground	---	15 / 5.1 / #12 / Reversing		15 / 5.5 / #12 / Reversing	
	-15	208-240 / 60 / 1 / 2 wire + ground	15 / 5.1 / #12 / Non-Reversing	15 / 5.1 / #12 / Non-Reversing		15 / 5.5 / #12 / Non-Reversing	
		120 / 60 / 1 / 2 wire + ground	15 / 9.6 / #12 / Non-Reversing	15 / 9.6 / #12 / Non-Reversing		15 / 10.4 / #12 / Non-Reversing	
	-39	230 / 50 / 1 / 2 wire + ground	10 / 5.1 / 2.1 mm ² / Non-Reversing	10 / 5.1 / 2.1 mm ² / Reversing + Non-Rev		10 / 5.2 / 2.1 mm ² / Reversing & Non-Reversing	
Installation	Minimum Clearance Between Machines - in (cm)	0 (0)	0 (0)	0 (0)		0 (0)	
	Minimum Clearance Behind Machines - in (cm)	18 (45.7)	18 (45.7)	18 (45.7)		18 (45.7)	
	Make-Up Air Required - sq ft (sq cm)	1 (929)	1.25 (1161)	1.5 (1394)			
	Exhaust Size - in (cm)	8 (20.3)	8 (20.3)	8 (20.3)		8 (20.3)	
	Max. Exhaust Back Pressure (Water Column) - in (mm)	0.3 (7.6)	0.3 (7.6)	0.3 (7.6)		0.3 (7.6)	
	Recommended Exhaust Length - ft (m) & 2 elbows	14 (4.3)	14 (4.3)	14 (4.3)		14 (4.3)	
Options	Controls	O-Series	O-Series	O-Series			
	Reversing	---	Option	Option			
	Other Features & Options	Moisture Detection, Fire Response	Moisture Detection, Fire Response	Moisture Detection, Fire Response			

		T-120		T-170		
Capacity	Dry Weight Capacity - lb (kg)	120 (54.4)	170 (77.1)			
	Cylinder Volume - cu ft (L)	36.1 (1022.2)	50 (1415.8)			
Speed	Tumbler Speed - RPM	36.5 ---	32.5 ---			
	Motor Size - Reversing - 60 Hz : 50 Hz - hp (kW)	1 & 1 : 1 & 0.75 (0.75 & 0.75 : 0.75 & 0.56)	2 & 3 : --- (1.5 & 2.2 : ---)			
Airflow	Airflow 10" Outlet - 60 Hz & 50 Hz - cfm (M3/min)	1250 : 1000 (35.4 : 28.3)	---			
	Airflow 12" Outlet - 60 Hz & 50 Hz - cfm (M3/min)	1450 : 1000 (41.1 : 28.3)	1900 : --- (53.8 : ---)			
Dimensions & Weight	Cabinet Height - in (cm)	85 5/16 (216.7)	94 (238.8)			
	Cabinet Width - in (cm)	46 3/4 (188.7)	53 1/8 (134.9)			
	Cabinet Depth - in (cm)	60 3/16 (152.9)	63 (160)			
	Door Opening - in (cm)	30 (76.2)	30 (76.2)			
	Floor to Door Bottom - in (cm)	34 (86.4)	36 3/4 (93.3)			
	Cylinder Diameter - in (cm)	43 (109.2)	50 1/4 (127.6)			
	Cylinder Depth - in (cm)	43 (109.2)	43 1/2 (110.5)			
	Lint Screen Area - sq in (sq cm)	862 (5561)	1021 (6587)			
	Net Weight - lb (kg)	1075 (487.6)	1361 (617.3)			
	Shipping	Shipping Weight - lb (kg)	1122 (508.9)	1440 (653.2)		
Shipping Height - in (cm)		88 3/8 (224.5)	97 1/8 (246.7)			
Shipping Width - in (cm)		48 1/4 (122.6)	54 5/8 (138.7)			
Shipping Depth - in (cm)		68 1/2 (174)	71 3/8 (181.3)			
Gas	Gas Supply Connection - in (mm)	3/4 (19.1)	1 (25.4)			
	Natural Gas Supply (Water Column) - in (cm)	5-8 (12.7-20.3)	5-8 (12.7-20.3)			
	LP Gas Supply (Water Column) - in (cm)	11 1/2-13 1/2 (29.2-34.3)	11 1/2-13 1/2 (29.2-34.3)			
	Gas Usage - 60Hz : 50 Hz - BTU/hr (kW)	320,000 : 300,000 (93.8 : 87.9)	400,000 : --- (117.2 : ---)			
Electrical	Gas Models	Volts / Hz / Phase / Wiring		Circuit Breaker Amps / Running Amps / Wire Size / Reversing Availability		
	-10	120 / 60 / 1 / 2 wire + ground		25 / 15 / #12 / Reversing		---
	-11	208-240 / 60 / 1 / 2 wire + ground		20 / 10 / #12 / Reversing		---
	-13	208-240 / 60 / 3 / 3 wire + ground				20 / 8.5 / #12 / Reversing
	-39	230 / 50 / 1 / 2 wire + ground		20 / 10 / 3.5 mm ² / Reversing		---
Installation	Minimum Clearance Between Machines - in (cm)	0 (0)	0 (0)	0 (0)		0 (0)
	Minimum Clearance Behind Machines - in (cm)	18 (45.7)	18 (45.7)	18 (45.7)		18 (45.7)
	Make-Up Air Required - sq ft (sq cm)	2.25 (2090)	3 (2787)			
	Exhaust Size - in (cm)	10 or 12 (25.4 or 30.5)	12 (30.5)			
	Max. Exhaust Back Pressure (Water Column) - in (mm)	0.3 (7.6)	0.3 (7.6)			
	Recommended Exhaust Length - ft (m) & 2 elbows	14 (4.3)	14 (4.3)			
Options	Controls	O-Series		O-Series		
	Reversing	Standard		Standard		
	Other Features & Options	Moisture Detection, Fire Response		Moisture Detection, Fire Response		

EXPRESS 6-CYCLE DRYER SPECIFICATIONS

		T-30		T-50		T-80	
Capacity	Dry Weight Capacity - lb (kg)	30 (13.6)	50 (22.7)	80 (36.3)			
	Cylinder Volume - cu ft (L)	11.3 (320)	15.8 (447.4)	23 (651.3)			
Speed & Airflow	Tumbler Speed - RPM	47 ---	45 ---	40 ---			
	Motor Size - Non-Reversing - 60 Hz : 50 Hz - hp (kW)	0.5 : 0.5 (0.38 : 0.38)	1 : 0.75 (0.75 : 0.56)	1 : 0.75 (0.75 : 0.56)			
	Motor Size - Reversing - 60 Hz : 50 Hz - hp (kW)	---	2 & 0.5 : --- (1.5 & 0.38 : ---)	1 & 0.75 : 1 & 0.75 (0.75 & 0.56 : 0.75 & 0.56)			
	Airflow 8" Outlet - 60 Hz : 50 Hz - cfm (M3/min)	830 : 690 (23.5 : 19.5)	910 : 760 (25.8 : 21.5)	1200 : 1000 (34 : 28.3)			
Dimensions & Weight	Cabinet Height - in (cm)	72 1/4 (183.5)	72 1/4 (183.5)	75 3/4 (192.4)			
	Cabinet Width - in (cm)	31 1/2 (80)	34 1/2 (87.6)	38 1/2 (97.8)			
	Cabinet Depth - Non-Reversing : Reversing - in (cm)	41 3/4 : --- (106 : ---)	48 : 50 (121.9 : 127)	51 3/4 (131.4)			
	Door Opening - in (cm)	22 5/8 (57.5)	25 5/8 (65.1)	25 5/8 (65.1)			
	Floor to Door Bottom - in (cm)	28 3/4 (73)	27 1/4 (69.2)	29 1/4 (74.3)			
	Cylinder Diameter - in (cm)	30 (76.2)	32 1/2 (82.6)	36 1/2 (92.7)			
	Cylinder Depth - in (cm)	27 1/2 (69.9)	33 (83.8)	38 (96.5)			
	Lint Screen Area - sq in (sq cm)	515 (3323)	708 (4568)	823 (5310)			
Shipping	Net Weight - Non-Reversing : Reversing - lb (kg)	454 : --- (205.9 : ---)	540 : 560 (244.9 : 254)	715 (324.3)			
	Shipping Weight - Non-Reversing : Reversing - lb (kg)	499 : --- (226.3 : ---)	590 : 620 (267.6 : 281.2)	770 (349.3)			
	Shipping Height - in (cm)	77 1/4 (196.2)	77 1/4 (196.2)	80 3/4 (205.1)			
	Shipping Width - in (cm)	32 3/4 (83.2)	36 (91.4)	40 1/4 (102.2)			
Gas	Shipping Depth - Non-Reversing : Reversing - in (cm)	45 1/2 : --- (115.6 : ---)	51 1/2 : 53 1/2 (130.8 : 135.9)	55 1/2 (141)			
	Gas Supply Connection - in (mm)	1/2 (12.7)	1/2 (12.7)	3/4 (19.1)			
	Natural Gas Supply (Water Column) - in (cm)	5-8 (12.7-20.3)	5-8 (12.7-20.3)	5-8 (12.7-20.3)			
	LP Gas Supply (Water Column) - in (cm)	11 1/2-13 1/2 (29.2-34.3)	11 1/2-13 1/2 (29.2-34.3)	11 1/2-13 1/2 (29.2 - 34.3)			
Electrical	Gas Usage - 60Hz : 50 Hz - BTU/hr (kW)	90,000 : 74,000 (26.4 : 21.7)	145,000 : 120,000 (42.5 : 35.2)	215,000 : 195,000 (63 : 57.1)			
	Gas Models	Volts / Hz / Phase / Wiring	Circuit Breaker Amps / Running Amps / Wire Size / Reversing Availability				
	-10	120 / 60 / 1 / 2 wire + ground	15 / 9.6 / #12 / Non-Reversing	15 / 9.6 / #12 / Non-Reversing	15 / 10.4 / #12 / Reversing & Non-Reversing		
	-11	208-240 / 60 / 1 / 2 wire + ground	---	15 / 5.1 / #12 / Reversing			
	-39	230 / 50 / 1 / 2 wire + ground	10 / 5.1 / 2.1 mm ² / Non-Reversing	10 / 5.1 / 2.1 mm ² / Non-Reversing	10 / 5.2 / 2.1 mm ² / Reversing & Non-Reversing		
	-59	230 / 50 / 1 / 2 wire + ground	10 / 5.1 / 2.1 mm ² / Non-Reversing	10 / 5.1 / 2.1 mm ² / Non-Reversing	10 / 5.2 / 2.1 mm ² / Non-Reversing		
	Electric Models	kW / Volts / Hz / Phase / Wiring	Circuit Breaker Amps / Running Amps / Wire Size / Reversing Availability				
	-71	24 / 208 / 60 / 3 / 4 wire + ground	90 / 85 / #2 / Non-Reversing	90 / 85 / #2 / Non-Reversing	---		
	-72	30 / 208 / 60 / 3 / 4 wire + ground	---	100 / 100 / #1 / Non-Reversing	100 / 100 / #1 / Non-Reversing		
	-73	35 / 208 / 60 / 3 / 4 wire + ground			125 / 120 / (1/0) / Non-Reversing		
	-74	24 / 240 / 60 / 3 / 4 wire + ground	80 / 75 / #3 / Non-Reversing	80 / 75 / #3 / Non-Reversing	---		
	-75	30 / 240 / 60 / 3 / 4 wire + ground	---	90 / 90 / #2 / Non-Reversing	90 / 90 / #2 / Non-Reversing		
	-76	36 / 240 / 60 / 3 / 4 wire + ground			110 / 105 / #1 / Non-Reversing		
-77	20 / 208 / 60 / 1 / 3 wire + ground	125 / 120 / (1/0) / Non-Reversing	---	---			
-78	20 / 240 / 60 / 1 / 3 wire + ground	110 / 105 / (1/0) / Non-Reversing	---	---			
-79	24 / 400 / 50 / 3 / 4 wire + ground	50 / 45 / 13.3 mm ² / Non-Reversing	50 / 45 / 13.3 mm ² / Non-Reversing	50 / 45 / 13.3 mm ² / Non-Reversing			
Installation	Minimum Clearance Between Machines - in (cm)	0 (0)	0 (0)	0 (0)			
	Minimum Clearance Behind Machines - in (cm)	18 (45.7)	18 (45.7)	18 (45.7)			
	Make-Up Air Required - sq ft (sq cm)	1 (929)	1.25 (1161)	1.5 (1394)			
	Exhaust Size - in (cm)	8 (20.3)	8 (20.3)	8 (20.3)			
	Max. Exhaust Back Pressure (Water Column) - in (mm)	0.3 (7.6)	0.3 (7.6)	0.3 (7.6)			
	Recommended Exhaust Length - ft (m) & 2 elbows	14 (4.3)	14 (4.3)	14 (4.3)			
Options	Controls	6-Cycle	6-Cycle	6-Cycle			
	Reversing	---	Option	Option			

Due to continuous product improvements specifications are subject to change, please consult the installation manual for the most accurate information.
*Agency approvals vary based on machine configuration. Major approval bodies include ETL, CE and AGA. Dexter Laundry is ISO 9001:2015 certified by Intertek.

EXPRESS 6-CYCLE DRYER SPECIFICATIONS

		T-120		T-170		
Capacity	Dry Weight Capacity - lb (kg)	120 (54.4)	170 (77.1)			
	Cylinder Volume - cu ft (L)	36.1 (1022.2)	50 (1415.8)			
Speed	Tumbler Speed - RPM	36.5 ---	32.5 ---			
	Motor Size - Reversing - 60 Hz : 50 Hz - hp (kW)	1 & 1 : 1 & 0.75 (0.75 & 0.75 : 0.75 & 0.56)	2 & 3 : --- (1.5 & 2.2 : ---)			
Airflow	Airflow 10" Outlet - 60 Hz & 50 Hz - cfm (M3/min)	1250 : 1000 (35.4 : 28.3)	---	---		
	Airflow 12" Outlet - 60 Hz & 50 Hz - cfm (M3/min)	1450 : 1000 (41.1 : 28.3)	1900 : --- (53.8 : ---)			
Dimensions & Weight	Cabinet Height - in (cm)	85 5/16 (216.7)	94 (238.8)			
	Cabinet Width - in (cm)	46 3/4 (188.7)	53 1/8 (134.9)			
	Cabinet Depth - in (cm)	60 3/16 (152.9)	63 (160)			
	Door Opening - in (cm)	30 (76.2)	30 (76.2)			
	Floor to Door Bottom - in (cm)	34 (86.4)	36 3/4 (93.3)			
	Cylinder Diameter - in (cm)	43 (109.2)	50 1/4 (127.6)			
	Cylinder Depth - in (cm)	43 (109.2)	43 1/2 (110.5)			
	Lint Screen Area - sq in (sq cm)	862 (5561)	1021 (6587)			
Shipping	Net Weight - lb (kg)	1075 (487.6)	1361 (617.3)			
	Shipping Weight - lb (kg)	1122 (508.9)	1440 (653.2)			
	Shipping Height - in (cm)	88 3/8 (224.5)	97 1/8 (246.7)			
	Shipping Width - in (cm)	48 1/4 (122.6)	54 5/8 (138.7)			
Gas	Shipping Depth - in (cm)	68 1/2 (174)	71 3/8 (181.3)			
	Gas Supply Connection - in (mm)	3/4 (19.1)	1 (25.4)			
	Natural Gas Supply (Water Column) - in (cm)	5-8 (12.7-20.3)	5-8 (12.7-20.3)			
	LP Gas Supply (Water Column) - in (cm)	11 1/2-13 1/2 (29.2-34.3)	11 1/2-13 1/2 (29.2-34.3)			
Electrical	Gas Usage - 60Hz : 50 Hz - BTU/hr (kW)	320,000 : 300,000 (93.8 : 87.9)	400,000 : --- (117.2 : ---)			
	Gas Models	Volts / Hz / Phase / Wiring	Circuit Breaker Amps / Running Amps / Wire Size / Reversing Availability			
	-10	120 / 60 / 1 / 2 wire + ground	25 / 15 / #12 / Reversing	---		
	-13	208-240 / 60 / 3 / 3 wire + ground	---	20 / 8.5 / #12 / Reversing		
	-39	230 / 50 / 1 / 2 wire + ground	20 / 10 / 3.5 mm ² / Reversing	---		
	Installation	Minimum Clearance Between Machines - in (cm)	0 (0)	0 (0)	0 (0)	
		Minimum Clearance Behind Machines - in (cm)	18 (45.7)	18 (45.7)	18 (45.7)	
		Make-Up Air Required - sq ft (sq cm)	2.25 (2090)	3 (2787)	3 (2787)	
		Exhaust Size - in (cm)	10 or 12 (25.4 or 30.5)	12 (30.5)	12 (30.5)	
		Max. Exhaust Back Pressure (Water Column) - in (mm)	0.3 (7.6)	0.3 (7.6)	0.3 (7.6)	
		Recommended Exhaust Length - ft (m) & 2 elbows	14 (4.3)	14 (4.3)	14 (4.3)	
	Options	Controls	6-Cycle	6-Cycle	6-Cycle	
		Reversing	Standard	Standard	Standard	

Due to continuous product improvements specifications are subject to change, please consult the installation manual for the most accurate information.
*Agency approvals vary based on machine configuration. Major approval bodies include ETL, CE and AGA. Dexter Laundry is ISO 9001:2015 certified by Intertek.

EXPRESS 6-CYCLE STACK DRYER SPECIFICATIONS

		T-20x2		T-30x2		T-50x2	
Capacity	Dry Weight Capacity - lb (kg)	2 x 20 (2 x 9.1)	2 x 30 (2 x 13.6)	2 x 50 (2 x 22.7)			
	Cylinder Volume (per tumbler) - cu ft (L)	7 (320)	11.3 (320)	15.8 (447.4)			
Speed & Airflow	Tumbler Speed - RPM	51 ---	47 ---	45 ---			
	Motor Size (per tumbler) - Non-Reversing : Reversing: - hp (kW)	0.3 : --- (0.38 : ---)	0.5 : --- (0.38 : ---)	0.75 : 2 & 0.5 (0.56 : 1.5 & 0.38)			
	Airflow - 60 Hz (per tumbler) - cfm (M3/min)	370 (10.5)	600 (17)	650 (18.4)			
	Airflow - 50 Hz (per tumbler) - cfm (M3/min)	300 (8.5)	500 (14.2)	510 (14.4)			
Dimensions & Weight	Cabinet Height - in (cm)	68 1/2 (174)	76 1/4 (193.7)	79 1/4 (201.3)			
	Cabinet Width - in (cm)	27 (68.6)	31 1/2 (80)	34 1/2 (87.6)			
	Cabinet Depth - in (cm)	44 5/8 (113.3)	49 1/2 (125.7)	54 3/4 (139.1)			
	Door Opening - in (cm)	18 1/8 (46)	22 5/8 (57.5)	25 5/8 (65.1)			
	Floor Door Bottom - Lower : Upper - in (cm)	8 1/2 : 42 (21.6 : 106.7)	7 5/8 : 45 1/4 (19.4 : 114.9)	7 : 46 (17.8 : 116.8)			
	Cylinder Diameter - in (cm)	25 1/2 (64.8)	30 (76.2)	32 1/2 (82.6)			
	Cylinder Depth - in (cm)	24 (61)	27 1/2 (69.9)	33 (83.8)			
	Lint Screen Area (per tumbler) - sq in (sq cm)	285 (1839)	453 (2923)	544 (3510)			
	Net Weight - lb (kg)	615 (279)	719 (326.1)	871 (395.1)			
	Shipping	Shipping Weight - lb (kg)	650 (295)	765 (347)	922 (418.2)		
Shipping Height - in (cm)		74 (188)	81 1/4 (206.4)	84 1/4 (214)			
Shipping Width - in (cm)		31.5 (80)	33 (83.8)	36 (91.4)			
Shipping Depth - in (cm)		49 (124.5)	57 3/4 (146.7)	61 1/2 (156.2)			
Gas	Gas Supply Connection - in (mm)	1/2 (12.7)	1/2 (12.7)	1/2 (12.7)			
	Natural Gas Supply (Water Column) - in (cm)	5-8 (12.7-20.3)	5-8 (12.7-20.3)	5-8 (12.7-20.3)			
	LP Gas Supply (Water Column) - in (cm)	11 1/2 - 13 1/2 (29.2 - 34.3)	11 1/2 - 13 1/2 (29.2 - 34.3)	11 1/2 - 13 1/2 (29.2 - 34.3)			
	Gas Usage - 60 Hz : 50 Hz (per tumbler) - BTU/hr (kW)	56,000 : 47,000 (16.4 : 13.8)	90,000 : 74,000 (26.4 : 21.7)	108,000 : 96,500 (31.7 : 28.3)			
Electrical	Gas Models (per stack dryer)	Volts / Hz / Phase / Wiring	Circuit Breaker Amps / Running Amps / Wire Size / Reversing Availability				
	-11	208-240 / 60 / 1 / 2 wire + ground	---	---	20 / 15 / #12 / Reversing		
	-15	208-240 / 60 / 1 / 2 wire + ground	15 / 3.8 / #12 / Non-Reversing	15 / 5 / #12 / Non-Reversing	20 / 10 / #12 / Non-Reversing		
		120 / 60 / 1 / 2 wire + ground	15 / 7.8 / #12 / Non-Reversing	20 / 8 / #12 / Non-Reversing	30 / 20 / #10 / Non-Reversing		
	-39	230 / 50 / 1 / 2 wire + ground	15 / 6.6 / 3.5 mm ² / Non-Reversing	15 / 10 / 3.5 mm ² / Non-Reversing	20 / 15 / 3.5 mm ² / Reversing		
					20 / 10 / 3.5 mm ² / Non-Reversing		
-59	230 / 50 / 1 / 2 wire + ground	---	15 / 10 / 3.5 mm ² / Non-Reversing	20 / 10 / 3.5 mm ² / Non-Reversing			
Dexter Stack Dryers are also available with electrical heat configurations. For more information please refer to DEXTER.COM or contact your Dexter Authorized Distributor.							
Installation	Minimum Clearance Between Machines - in (cm)	0 (0)	0 (0)	0 (0)	0 (0)		
	Minimum Clearance Behind Machines - in (cm)	18 (45.7)	18 (45.7)	18 (45.7)	18 (45.7)		
	Make-Up Air Required (per stack dryer) - sq ft (sq cm)	1 (929)	1.5 (1394)	1.5 (1394)	1.5 (1394)		
	Exhaust Size - in (cm)	8 (20.3)	8 (20.3)	8 (20.3)	8 (20.3)		
	Max. Exhaust Back Pressure (Water Column) - in (mm)	0.3 (7.6)	0.3 (7.6)	0.3 (7.6)	0.3 (7.6)		
	Recommended Exhaust Length - ft (m) & 2 elbows	14 (4.3)	14 (4.3)	14 (4.3)	14 (4.3)		
Options	Controls	6-Cycle Only	6-Cycle Only	6-Cycle Only			
	Other Features & Options	---	---	Reversing			


EXPRESS 6-CYCLE STACK WASHER-DRYER SPECIFICATIONS

		T-350 SWD		T-450 SWD		T-750 SWD	
Capacity	Dry Weight Capacity (per machine) - lb (kg)	20 (9.1)	30 (13.6)	50 (22.7)			
	Cylinder Volume - Washer : Dryer - cu ft (L)	2.7 : 7 (76.5 : 198.2)	4 : 11.3 (113.3 : 320)	6.5 : 15.8 (184.1 : 447.4)			
Speed & Airflow	Washer Extract Speed - High - g (RPM)	200 (819)	200 (750)	200 (685)			
	Dryer Tumbler Speed - RPM	51 ---	47 ---	45 ---			
	Motor Size - Washer : Dryer - hp (kW)	1 : 1/3 (0.75 : 0.25)	2 : 1/2 (1.5 : 0.38)	3 : 2 & 1/2 (2.2 : 1.5 & 0.38)			
	Airflow - 60 Hz : 50 Hz - cfm (M3/min)	370 : 300 (10.5 : 8.5)	500 : 450 (14.6 : 12.7)	650 : 510 (18.4 : 14.4)			
Dimensions	Overall - Height : Width : Depth - in (cm)	74 3/4 : 27 : 44 5/8 (189.9 : 68.6 : 113.7)	78 3/8 : 31 1/2 : 49 7/16 (199 : 80 : 125.6)	87 3/16 : 34 1/2 : 54 5/8 (221.5 : 87.6 : 138.7)			
	Shipping - Height : Width : Depth - in (cm)	80 5/8 : 29 1/4 : 49 3/4 (204.8 : 74.3 : 126.4)	84 : 34 : 54 (213.4 : 86.4 : 137.2)	91 5/8 : 35 7/8 : 63 1/2 (232.7 : 91.1 : 161.3)			
	Weight - Net : Shipping - lb (kg)	800 : 840 (362.9 : 381)	1051 : 1101 (476.7 : 499.4)	1600 : 1650 (725.7 : 748.4)			
	Washer Cylinder - Diameter : Depth - in (cm)	21 : 13 1/2 (53.3 : 34.3)	25 : 14 1/8 (63.5 : 35.9)	30 : 16 (76.2 : 40.6)			
	Dryer Cylinder - Diameter : Depth - in (cm)	25 1/2 : 24 (64.8 : 61)	30 : 27 1/2 (76.2 : 69.9)	32 1/2 : 33 (82.5 : 83.8)			
	Door Opening - Washer : Dryer - in (cm)	12 1/4 : 18 1/8 (31.1 : 46)	15 1/4 : 22 11/16 (38.7 : 57.6)	19 1/4 : 25 5/8 (48.9 : 65.1)			
	Floor to Door Bottom - Washer : Dryer - in (cm)	14 7/8 : 48 1/4 (37.8 : 122.6)	12 7/16 : 47 3/8 (31.6 : 120.3)	16 : 55 1/8 (40.6 : 140)			
	Dryer Lint Screen Area - sq in (sq cm)	285 (1839)	453 (2923)	544 (3510)			
Installation	Min. Clearance - Between : Behind - in (cm)	1/2 : 24 (1.3 : 61)	1/2 : 24 (1.3 : 61)	1/2 : 24 (1.3 : 61)			
	Min. Concrete Thickness - in (cm)	6 (15.2)	6 (15.2)	8 (20.3)			
	Make-Up Air Required - sq ft (sq cm)	0.7 (650)	1 (929)	1 (929)			
	Exhaust Size - in (cm)	6 (15.2)	6 (15.2)	8 (20.3)			
	Max. Exhaust Back Pressure (Water Column) - in (mm)	0.3 (7.6)	0.3 (7.6)	0.3 (7.6)			
Recommended Exhaust Length - ft (m) & 2 elbows	14 (4.3)	14 (4.3)	14 (4.3)				
Water	Water Inlet Size - in (mm)	3/4 (19)	3/4 (19)	3/4 (19)			
	Pressure (min-max) - psi (kPa)	30-120 (207-827)	30-120 (207-827)	30-120 (207-827)			
	Flow Rate - gal/min (L/min)	9 (34)	9 (34)	9 (34)			
	Drain Diameter (O.D.) - in (cm)	2 1/4 (5.7)	3 (7.6)	3 (7.6)			
	Floor to Center of Drain - in (cm)	5 7/8 (14.9)	4 7/16 (11.3)	6 5/8 (16.8)			
Gas	Gas Supply Connection - in (mm)	1/2 (12.7)	1/2 (12.7)	1/2 (12.7)			
	Natural Gas Supply (Water Column) - in (cm)	5-8 (12.7-20.3)	5-8 (12.7-20.3)	5-8 (12.7-20.3)			
	LP Gas Supply (Water Column) - in (cm)	11 1/2 - 13 1/2 (29.2 - 34.3)	11 1/2 - 13 1/2 (29.2 - 34.3)	11 1/2 - 13 1/2 (29.2 - 34.3)			
	Gas Usage - 60 Hz : 50 Hz - BTU/hr (kW)	56,000 : 47,000 (16.4 : 13.8)	80,000 : 74,000 (23.4 : 21.7)	108,000 : 96,000 (31.7 : 28.3)			
Electrical	Model	Volts / Hz / Phase / Wiring	Circuit Breaker Amps / Running Amps / Wire Size / Dryer Reversing Availability				
	-16	Washer	208-240 / 60 / 1 / 2 wire + ground	---	---	20 / 8.4 / #12	
		Gas Dryer	208-240 / 60 / 3 / 3 wire + ground	---	---	15 / 10 / #12 / Reversing	
	-17	Washer	208-240 / 60 / 1 / 2 wire + ground	15 / 6.2 / #12	15 / 6.5 / #12	---	
		Gas Dryer	208-240 / 60 / 3 / 3 wire + ground	---	---	---	
	-39	Washer	120 / 60 / 1 / 2 wire + ground	15 / 3.9 / #12 / Non-Reversing	15 / 4 / #12 / Non-Reversing	---	
		Gas Dryer	208-240 / 60 / 1 / 2 wire + ground	15 / 1.9 / #12 / Non-Reversing	15 / 2.5 / #12 / Non-Reversing	---	
	-39	Washer	230 / 50 / 1 / 2 wire + ground	15 / 6.2 / 3.5 mm ²	15 / 6.5 / 3.5 mm ²	20 / 8.4 / 3.5 mm ²	
Gas Dryer		230 / 50 / 1 / 3 wire + ground	15 / 3.4 / 3.5 mm ² / Non-Reversing	15 / 5 / 3.5 mm ² / Non-Reversing	15 / 10 / 3.5 mm ² / Reversing		
Dexter Stack Washer-Dryers are also available with electrical heat configurations. For more information please refer to DEXTER.COM or contact your Dexter Authorized Distributor.							
Options	Controls	6-Cycle Only	6-Cycle Only	6-Cycle Only			
	Other Features & Options	---	---	Reversing Standard			

DEXTER LAUNDRY ON-PREMISE INDUSTRIES

Dexter Laundry products are found in successful laundries worldwide, including hotels, nursing homes, sports stadiums, correction centers, spas, and more. From hospitals to dairy farms, fire houses to battle ships, our products are built to tackle any challenge!





DEXTER[®]
LAUNDRY

DEXTER.COM | 1.800.524.2954

EMPLOYEE OWNED | MADE IN THE USA | SINCE 1894