


P/N 9506-840-001PR
 30 LB STACK DESIGN COIN EXPRESS, VF DRIVE,
 230V, CE WITH START AND E-STOP BUTTONS
 NO COIN ACCEPTOR, 24V ACTUATORS

SCHEMATIC

230V-1PH-50HZ

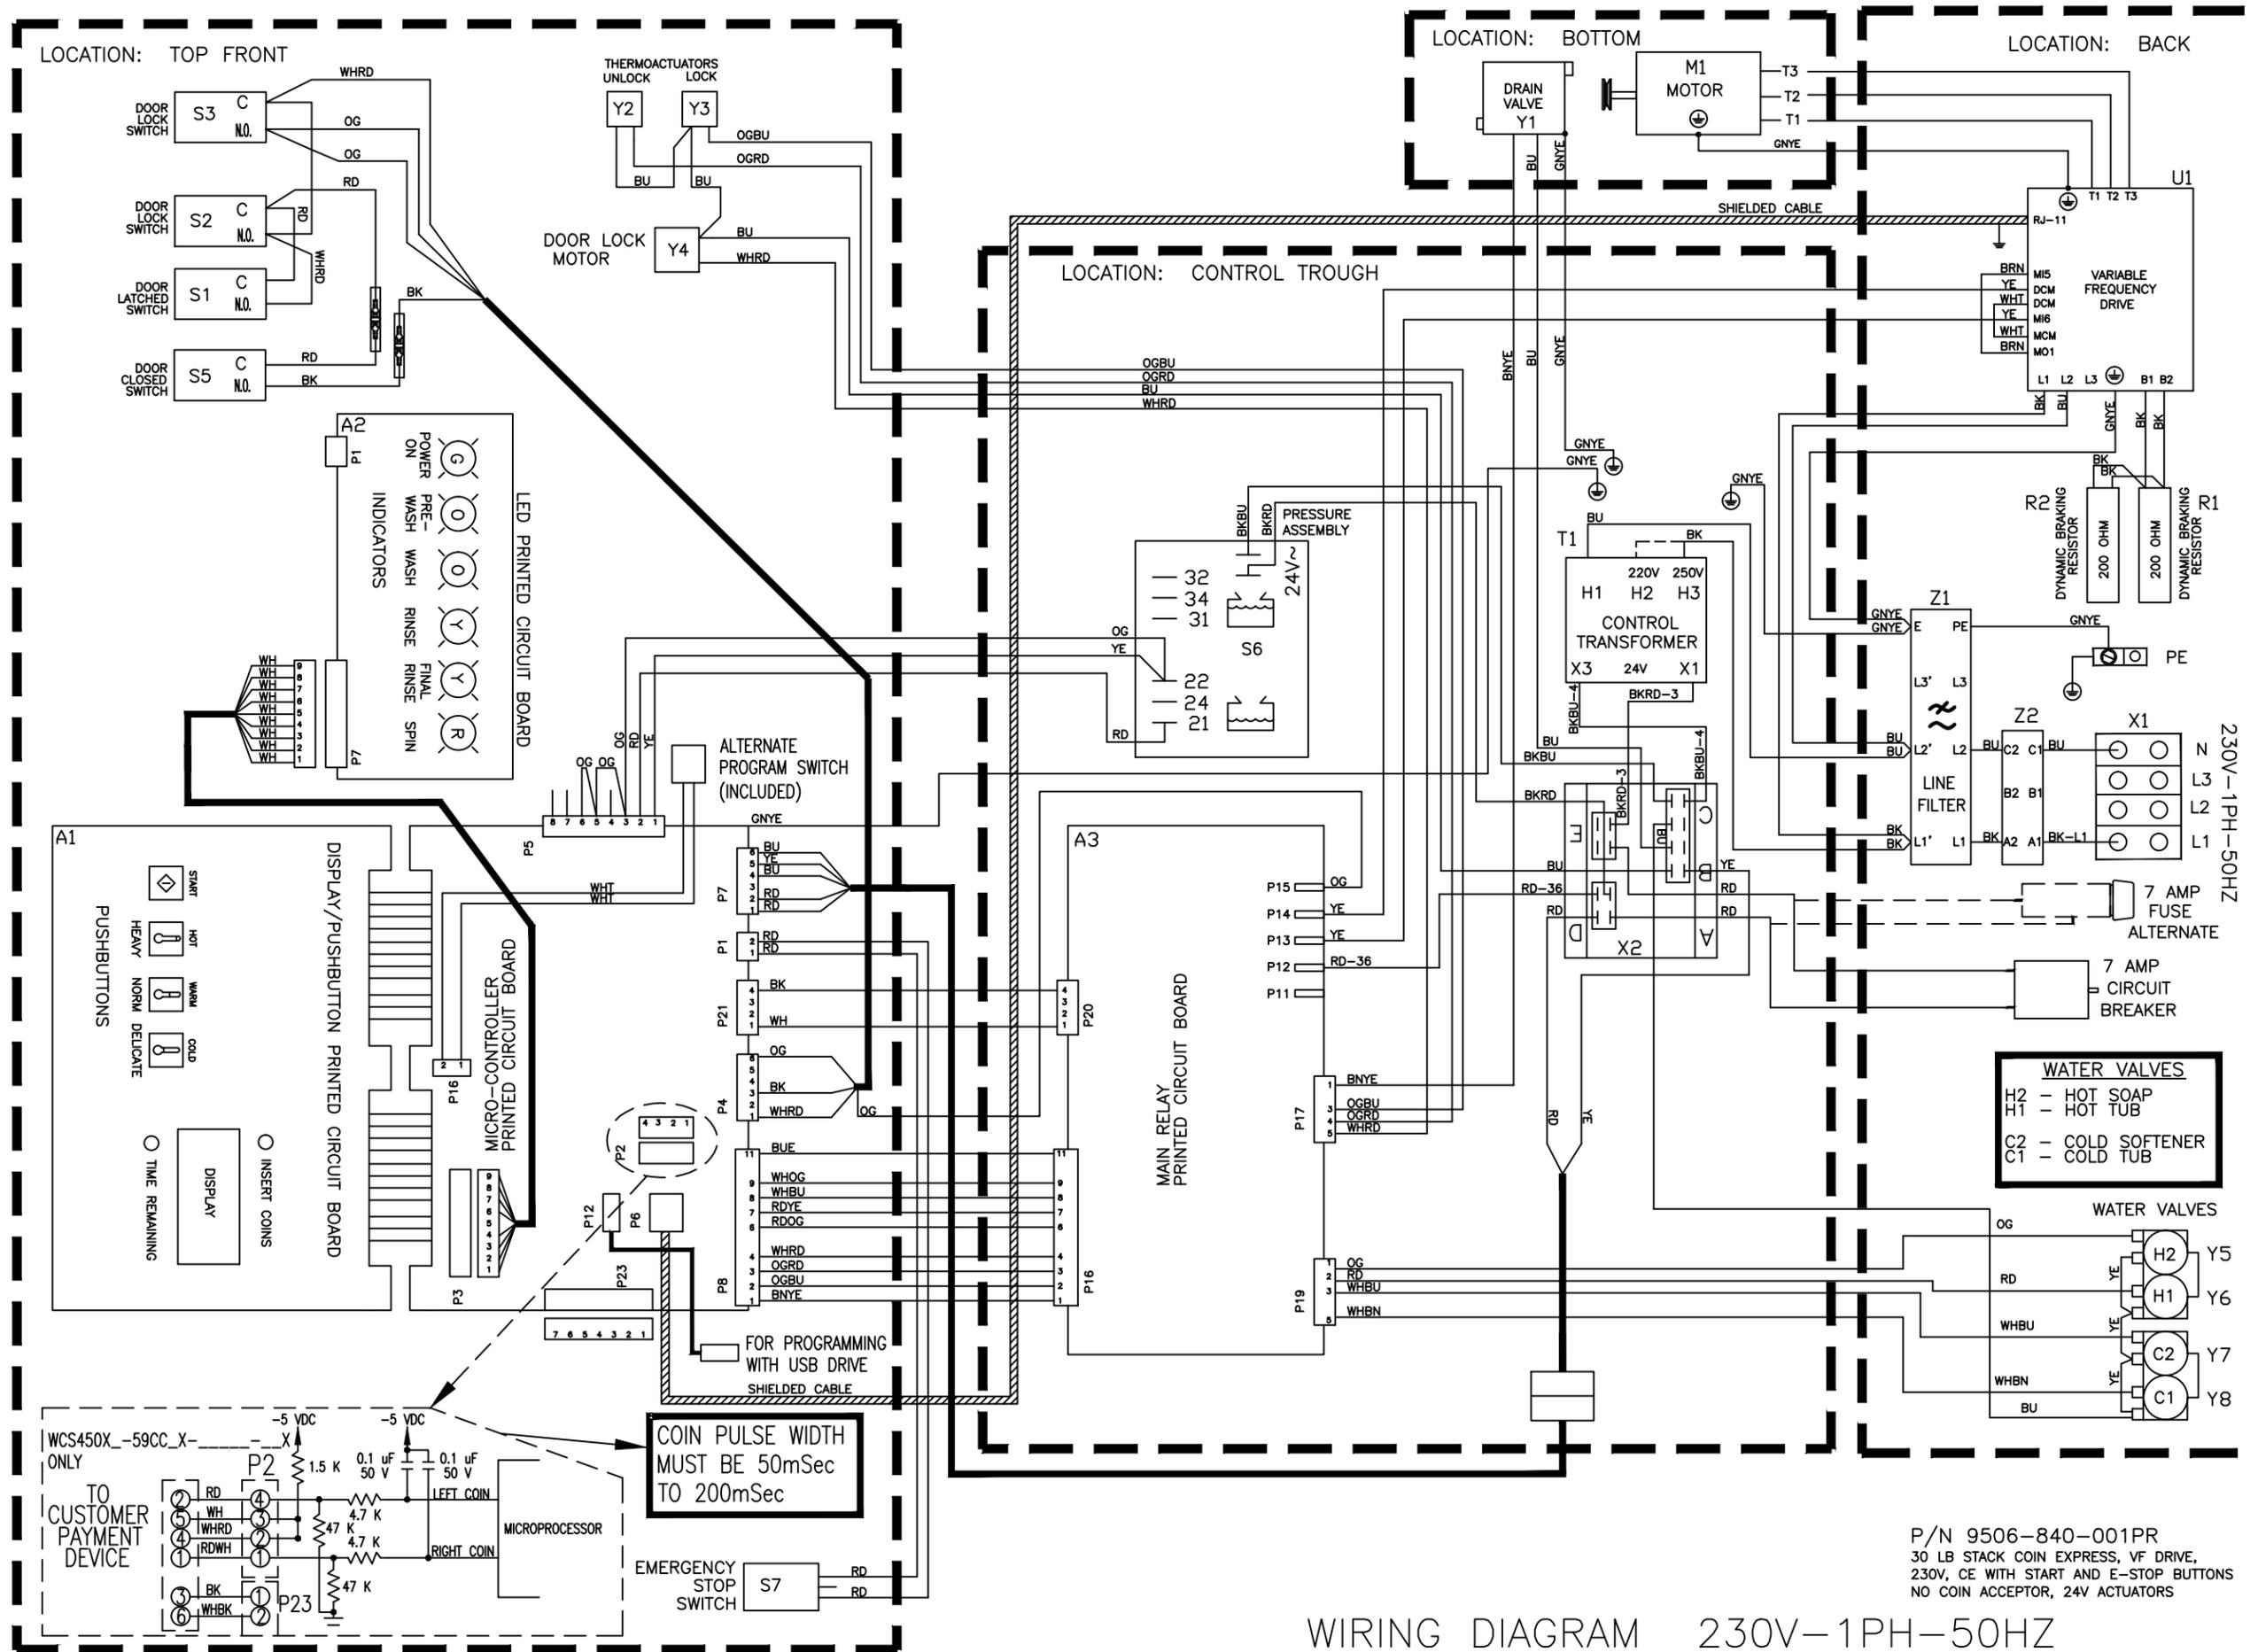


LOCATION: TOP FRONT

LOCATION: BOTTOM


LOCATION: BACK

LOCATION: CONTROL TROUGH

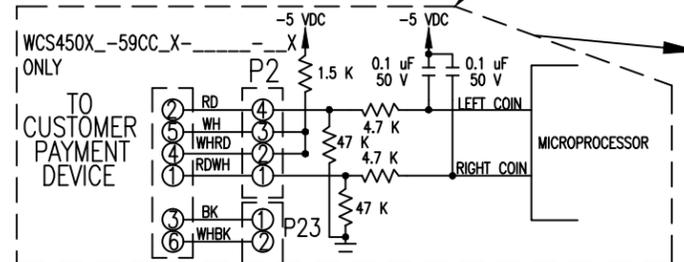

COIN PULSE WIDTH
MUST BE 50mSec
TO 200mSec

WATER VALVES
H2 - HOT SOAP
H1 - HOT TUB
C2 - COLD SOFTENER
C1 - COLD TUB



P/N 9506-840-001PR
30 LB STACK COIN EXPRESS, VF DRIVE,
230V, CE WITH START AND E-STOP BUTTONS
NO COIN ACCEPTOR, 24V ACTUATORS

WIRING DIAGRAM 230V-1PH-50HZ