




***DEXTER***<sup>®</sup>  
***LAUNDRY***

**USE THE BLUE TABS LOCATED ON THE  
RIGHT AND LEFT SIDES OF THE FOLLOWING  
DOCUMENT TO ADVANCE TO EACH SECTION.**

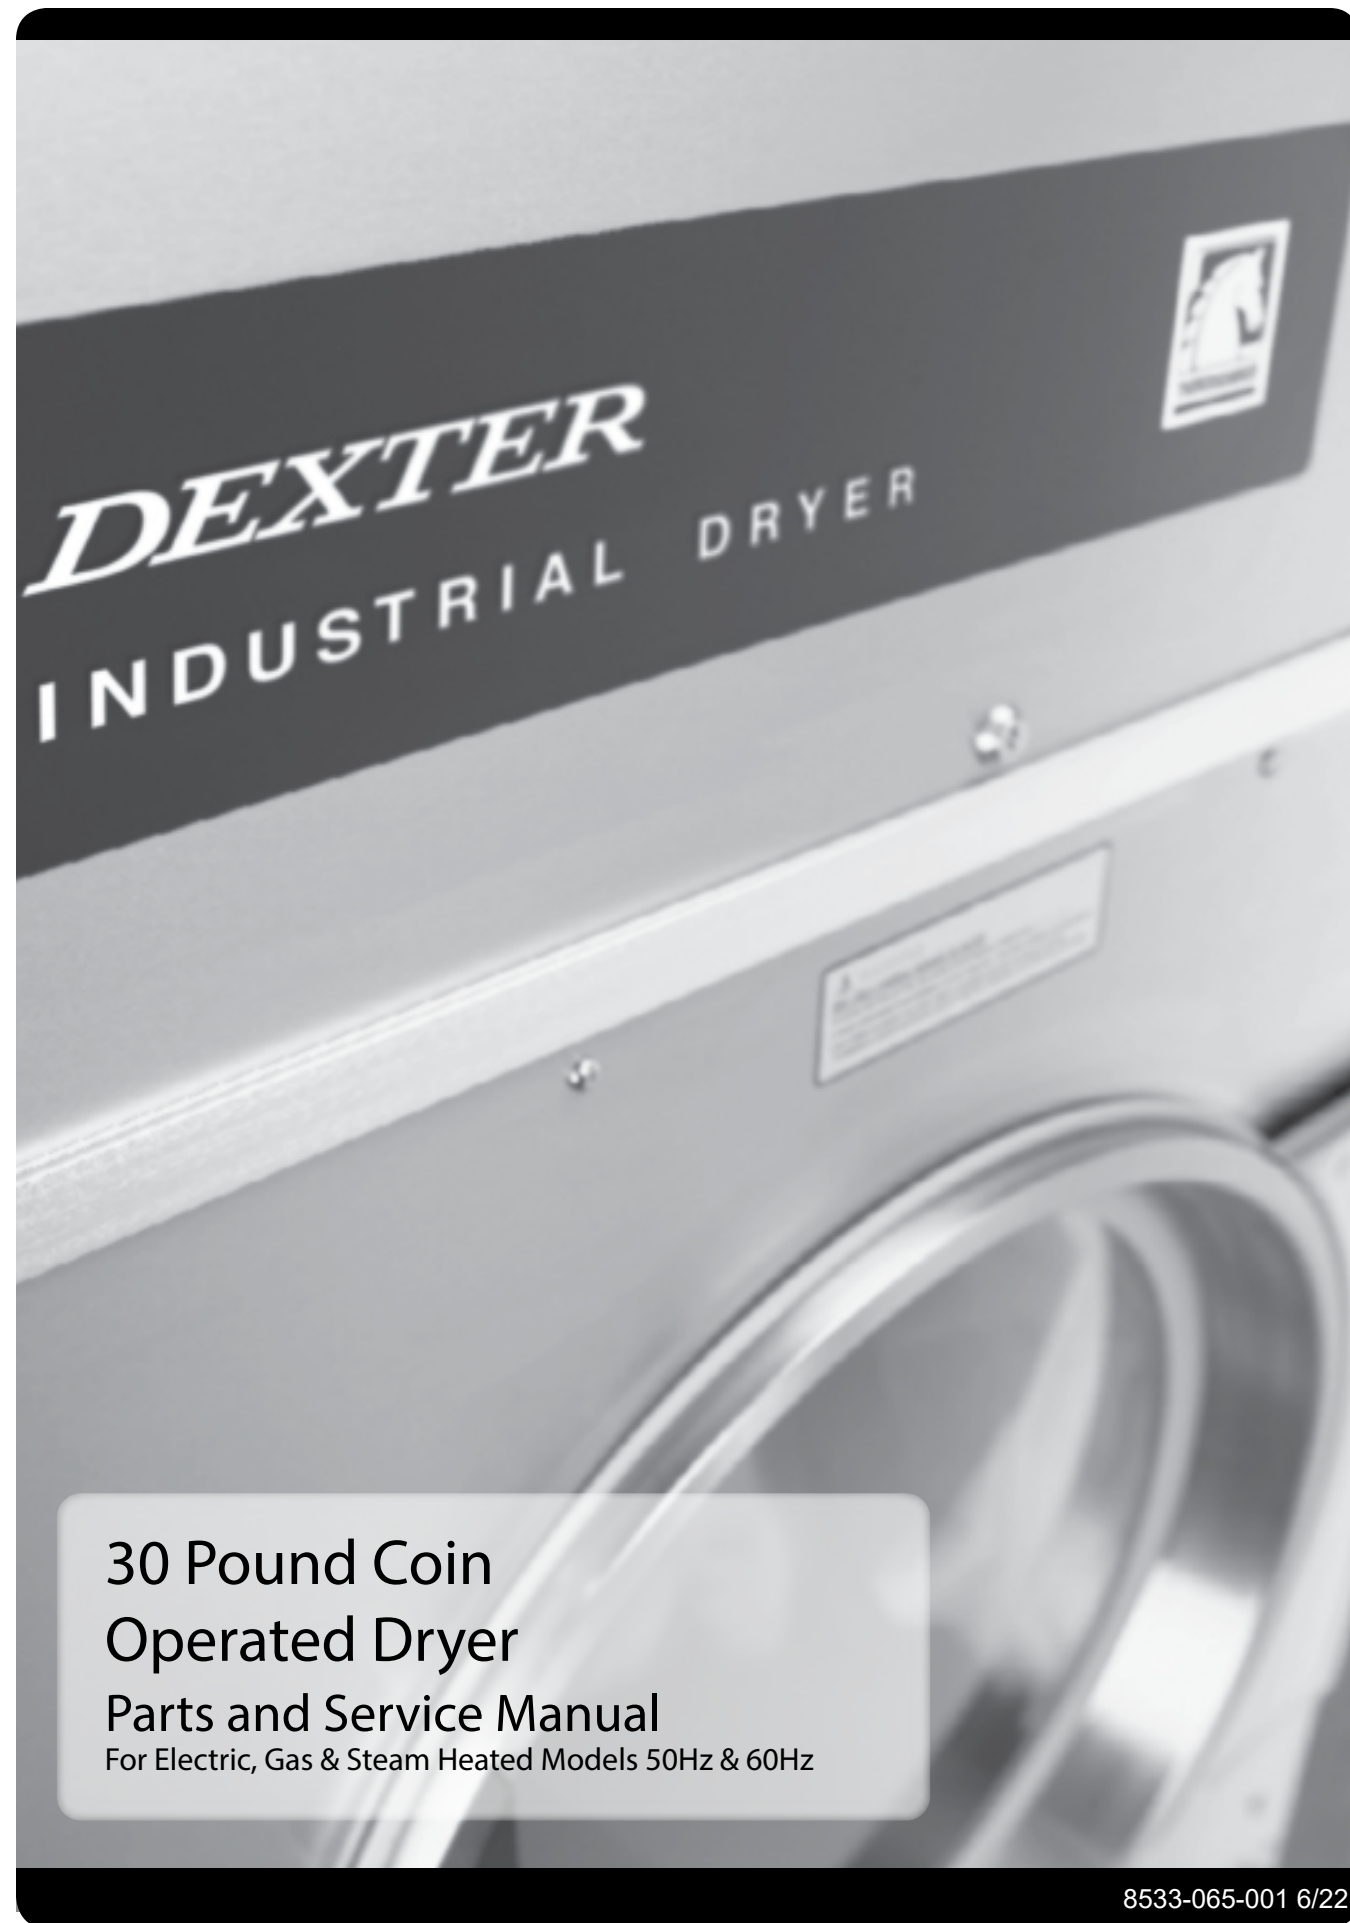

**30 Pound Coin  
Operated Dryer  
Parts and Service Manual**

For Electric, Gas & Steam Heated Models 50Hz & 60Hz

8533-065-001 6/22

## Dexter Safety Guidelines

### ! WARNING

The dryer must not be stored or installed where it will be exposed to water and/or weather.

For your safety the information in this manual must be followed to minimize the risk of fire or explosion or to prevent property damage, personal injury or death. Do not store or use gasoline or other flammable vapors and liquids in the vicinity of this or any other appliance.

#### WHAT TO DO IF YOU SMELL GAS

- Do not try to light any appliance.
- Do not touch any electrical switch: do not use any telephone in your building.
- Clear the room, building or area of all occupants.
- Immediately call your gas supplier from a neighbor's telephone.
- Follow the gas supplier's instructions.
- If you cannot reach your gas supplier, call the fire department. Installation and service must be performed by a qualified installer, service agency or the gas supplier.

***To activate your warranty, be sure to return your red warranty form to the factory. Please have serial number and model ready when calling for assistance.***

You, the purchaser, must post in a prominent location instructions to be followed in the event the user smells gas. Consult your local gas supplier for procedure to be followed if the odor of gas is present.

Post the following "For Your Safety" caution in a prominent location:

#### FOR YOUR SAFETY

Do not store or use gasoline or other flammable vapors or liquids in the vicinity of this or any other appliance.


**THIS MACHINE IS FOR DRYING ONLY FABRICS CLEANED IN WATER.**

To avoid possibility of fire, including spontaneous combustion, do not dry oiled floor mops, items containing foam rubber or similarly textured rubberlike materials or any material on which you have used a cleaning solvent or which contains flammable liquids or solids (such as gasoline, kerosene, waxes, etc.)

Specifications for below models  
are outlined in this book:

|                       |                                |                 |
|-----------------------|--------------------------------|-----------------|
| <b>DCTD30KC__10</b>   | <b>Gas Heated</b>              | <b>120/60/1</b> |
| <b>DCTD30KC__21CR</b> | <b>Gas Heated</b>              | <b>230/50/1</b> |
| <b>DCTD30KC__16FE</b> | <b>Electric Heated - 30 KW</b> | <b>208/60/3</b> |
| <b>DCTD30KC__59</b>   | <b>Gas Heated</b>              | <b>230/50/1</b> |
| <b>DCTD30KC__66FW</b> | <b>Electric Heated - 15 KW</b> | <b>415/50/3</b> |
| <b>DLC30Q</b>         | <b>Gas Heated</b>              |                 |

Mounting Dimensions

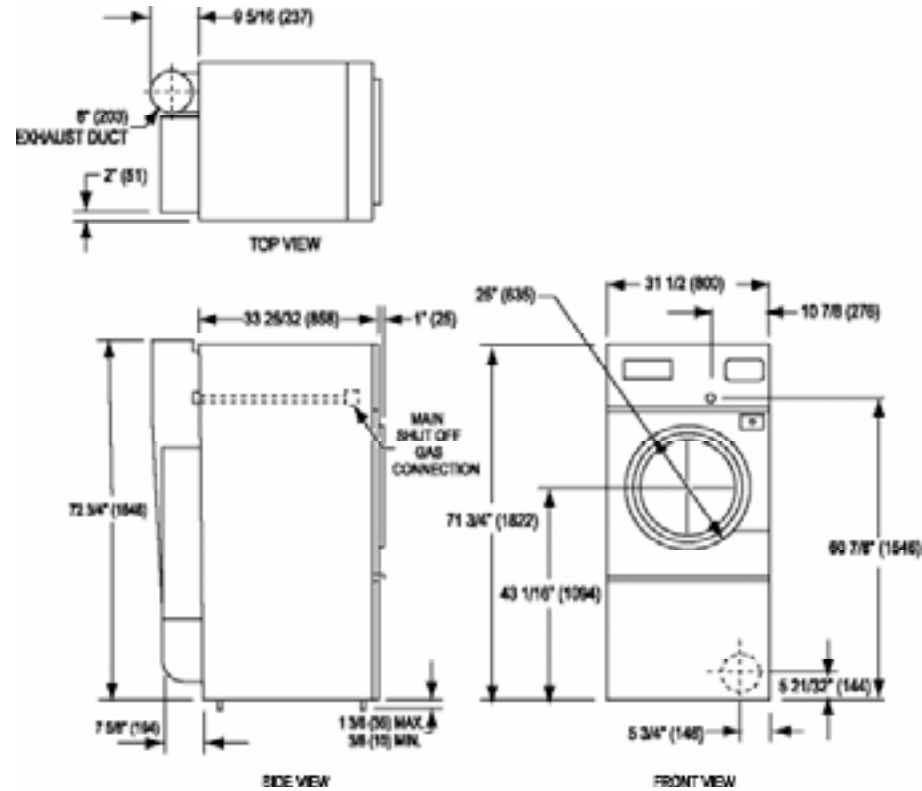

Section 1:  
Specifications

Model DTCD30

w/ Microprocessor Control Gas Heat Source

|  |                                  |
|--|----------------------------------|
| <b>Dry Weight Capacity (lbs)</b>           | 30 lbs                           |
| <b>Dimensions</b>                          |                                  |
| Basket Depth                               | 29 1/2"                          |
| Basket Diameter                            | 30"                              |
| Basket Volume                              | 12.07 cu ft.                     |
| Door Opening                               | 22 11/16"                        |
| Overall Height (with legs)                 | 73 1/8" minimum, 74 1/8" maximum |
| Cabinet Width                              | 31 1/2"                          |
| Overall Depth                              | 43 1/4"                          |
| Door Height (floor to center of door)      | 43 1/16"                         |
| Necessary Service Clearance Behind Machine | 18"                              |

|                              |             |
|------------------------------|-------------|
| <b>Temperature (degrees)</b> |             |
| Regular/Hot                  | 150 - 190 F |
| (factory setting)            | 175 F       |
| Permanent Press/Medium       | 120 - 170 F |
| (factory setting)            | 150 F       |
| Delicate/Warm                | 110 - 150 F |
| (factory setting)            | 125 F       |

|                                   |                 |
|-----------------------------------|-----------------|
| <b>Electrical</b>                 |                 |
| Motor HP                          | 1/2 HP          |
| Electrical Running Amps           | 9.6             |
| Circuit Breaker (amps)            | 15              |
| Built-in Motor Protection Circuit | Yes             |
| Phase                             | Single          |
| Voltage (60 Hz)                   | 120 V           |
| Circuit Protection (60 Hz)        | 15 AMP          |
| Service                           | 2 wire + ground |
| Wire Size                         | #12             |

|                          |                   |
|--------------------------|-------------------|
| <b>Cylinder Rotation</b> |                   |
| Direction                | counter clockwise |
| Speed (RPM)              | 47                |

|                           |              |
|---------------------------|--------------|
| <b>Gas</b>                |              |
| Natural (supply line)     | 5" - 8" WC   |
| Natural (burner manifold) | 3 1/2" WC    |
| L.P. (supply line)        | 11" - 14" WC |
| L.P. (burner manifold)    | 11" WC       |
| Inlet Line Size           | 1/2" NPT     |
| BTU Input                 | 90,000       |

|                                    |           |
|------------------------------------|-----------|
| <b>Venting</b>                     |           |
| Air Flow (cfm)                     | 830       |
| Size                               | 8"        |
| Maximum Length with 2 elbows       | 20 ft.    |
| Maximum Length with 4 elbows       | 16 ft.    |
| Make-up Air - Each Dryer (minimum) | 1 sq. ft. |

|                              |            |
|------------------------------|------------|
| <b>Shipping Weight (lbs)</b> | <b>486</b> |
| <b>Net Weight (lbs)</b>      | <b>439</b> |

# Section 2: Installation & Operation

## Section 2: Uncrating, Installation & Operation

Remove cardboard and innerpack. Complete the uncrating as described in the procedure listed on the instruction sheet taped to the loading door glass.

### Field Assembly


For secure packaging, the dryer is shipped with the tee, one part of the heat reclaimer, inside the lower service door.

### Installation

1. Remove 4 metal screws from the bag in coin box. Go to the rear of the dryer and remove the tape holding the top of the vertical 8" pipe.
2. Install the tee into both the vertical pipe and the horizontal boot. Using the four pilot holes provided, drill 4 matching 9/64 inch (3.6) diameter mounting holes; 2 holes through the boot into the tee outlet, and 2 holes through the tee inlet into the 8 inch vertical pipe. Install the 4 screws provided to secure the tee to the pipe and boot.
3. Install your exhaust system to the tee. Tape all joints with 2" duct tape.

### Alternate Installation

If it is desired to have the dryer exhaust at a low level, the installation can be altered as shown in the following illustration:

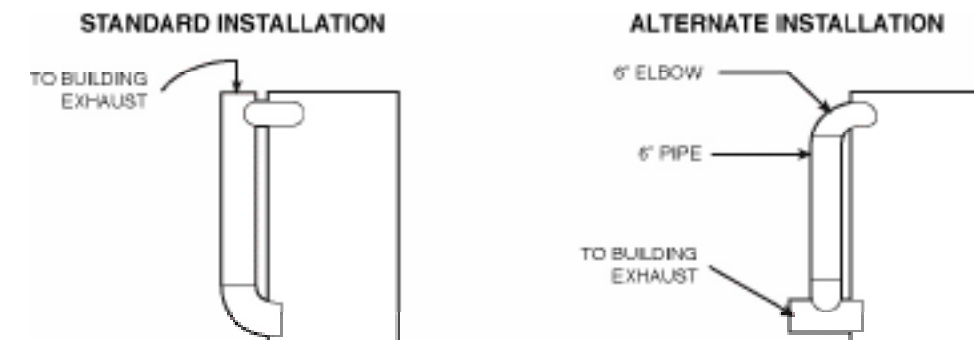

The installer should acquire a 6" dia. 90° elbow and 6" dia. straight pipe for the two areas shown in the alternate installation.

The exhaust tee may be cut off on the long end to give an over all length of 14" (356). This allows you to come vertically to the 6" elbow above. (The necessary pipe for the standard installation is included as shown.)

### Dryer Installation

1. **CODE CONFORMITY.** All commercial dryer installations must conform with local codes or, in the absence of local codes, with the latest edition of the National Fuel Gas Code ANSI 2223. 1. Canadian installations must comply with current Standard CAN/CGA-B149 (.1 or .2) Installation Code for Gas Burning Appliances or Equipment, and local codes if applicable. The appliance, when installed, must be electrically grounded in accordance with the latest edition of the National Electric Code, ANSI/NFPA70, or, when installed in Canada, with Standard CSA C22.1 Canadian Electrical Code Part 1.
2. **INSTALLATION CLEARANCES:** This unit may be installed at the following alcove clearance. (millimeters)


- I. Left Side 0"
- II. Right Side 1" (25)
- III. Back 18" (457) (Certified for 1" (25) clearance; however, 18" (457) clearance is necessary behind the belt guard to allow servicing and maintenance.)
- IV 48" (1220) (to allow use of dryer)
- V Top Refer to figure labelled "Vertical Clearance Dimensions"
  - AB. Certification allows 0" clearance at the top 1" (25) back from the front. However, a 1/4" (6) clearance is required to allow opening the upper service door.
  - CD. A 4" (102) clearance is required at the top between 1" (25) and 4" (102) from front.
  - E. A 10" (254) clearance is required from top at all other points.
- VI Floor This unit may be installed upon a combustible floor.

\*Units may be installed in direct contact with an adjacent dryer, providing allowance is made for opening upper and lower service doors.

Do not obstruct the flow of combustion and ventilation air.

Maintain minimum of 1" (25) clearance between duct and combustible material.

Refer to installation label attached to the inside surface of the upper door of the dryer for other installation information.

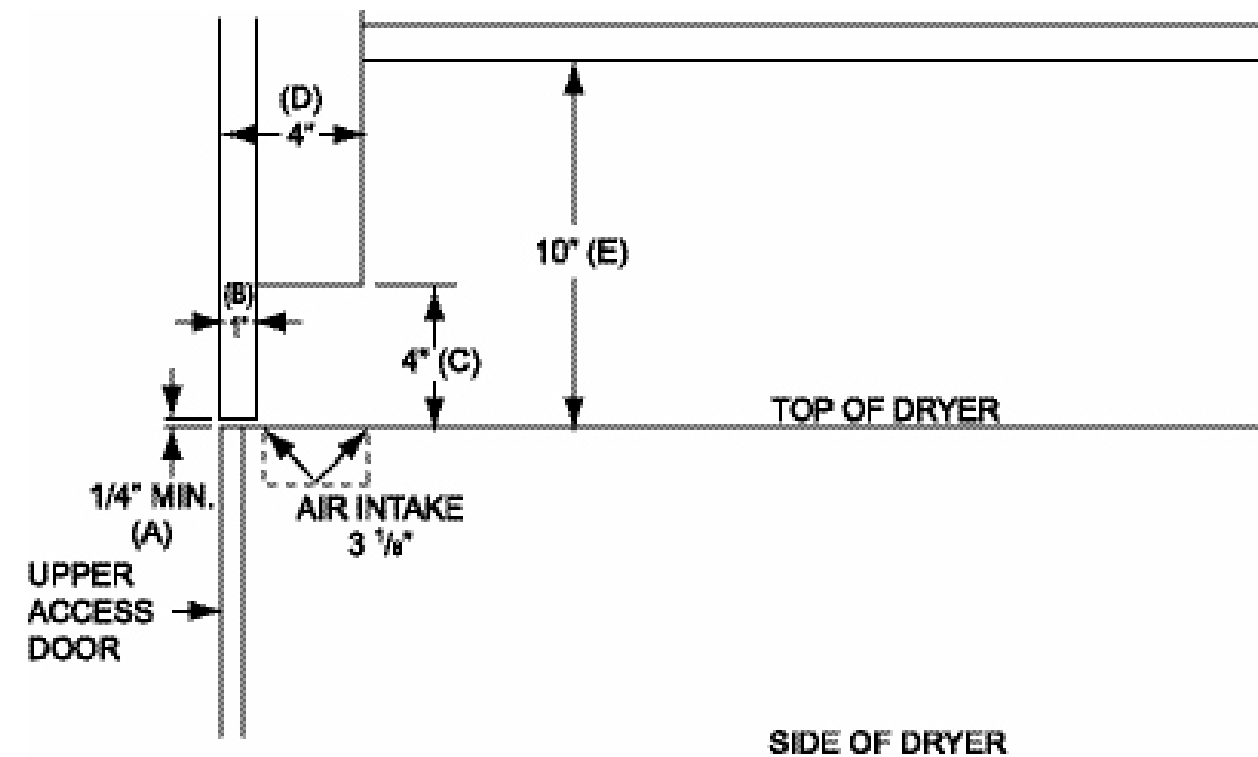

**Vertical Clearance Dimensions**

3. MAKE-UP AIR. Adequate make-up air (830 CFM) must be supplied to replace air exhausted by dryers on all types of installations. Provide a minimum of one square foot make-up air opening to the outside for each dryer. This is a net requirement of effective area. Screens, grills or louvers which will restrict the flow of air must be considered. Consult the supplier to determine the free area equivalent for the grill being used.

The source of make-up air should be located sufficiently away from the dryers to allow an even airflow to the air intakes of all dryers. Multiple openings should be provided.

**NOTE:** The following considerations must be observed for gas dryer installations where dry cleaners are installed. The sources of all make-up air and room ventilation air movement to all dryers must be located away from any dry cleaners. This is necessary so that solvent vapors will not be drawn into the dryer inlet ducts. Dry cleaner solvent vapors will decompose in contact with an open flame such as the gas flame present in clothes dryers. The decomposition products are highly corrosive and will cause damage to the dryer(s), ducts and clothes loads.

4. ELECTRICAL REQUIREMENTS. The electrical power requirements necessary to operate the unit satisfactorily are listed on the serial plate located on the back panel of each dryer. The electrical connection should be made to the pig tail leads in the outlet box (or terminal board, if supplied) on the rear of the unit, using a wire size adequate to handle the amperage and voltage listed on the serial plate, but never smaller than NO.12 AWG wire. It is absolutely necessary that the dryer be grounded to a known ground.

Individual circuit breakers for each unit are recommended. The wiring diagram is located on the belt guard on the back of the machine.

5. GAS REQUIREMENTS. The complete gas requirements necessary to operate the dryer satisfactorily are listed on the serial plate located on the back panel of the dryer.
- The inlet gas connection to the unit is 1/2 inch pipe thread. A joint compound resistant to the action of liquefied petroleum gases should be employed in making pipe connections.
  - An 1/8 inch NPT plugged tapping, accessible for test gage connection, must be installed immediately upstream of the gas supply connection to the dryer.
  - A drip tee should be provided in the gas piping entering the unit to catch dirt and other foreign articles.
  - All pipe connections should be checked for leakage with soap solution. Never check with an open flame. For altitudes above 2,000 feet (610m) it is necessary to derate the BTU input. Contact your local distributor for instructions.
  - L.P. gas conversion kits are available for this dryer. Contact your local distributor.

**CAUTION:** The dryer and its individual shutoff valve must be disconnected from the gas supply piping system during any pressure testing of that system at test pressures in excess of 1/2 psig. The dryer must be isolated from the gas supply piping system by closing its individual manual shutoff valve during any pressure testing of the gas supply piping system at test pressures equal to or less than 1/2 psig.

6. EXHAUST INSTALLATION. (Refer to Figure 2 at the end of section 6.) EXhausting of the dryer(s) should be planned and constructed so that no air restrictions occur. Any restriction due to pipe size or type of installation can cause slow drying time, excessive heat, and lint in the room. From an operational standpoint, incorrect or inadequate exhausting can cause a cycling of the high limit thermostat which shuts off the main burners and results in inefficient drying.

Individual exhausting of the dryers is recommended. All heat, moisture, and lint should be exhausted outside by attaching a pipe of the proper diameter to the dryer adapter collar and extending it out through an outside wall. This pipe must be very smooth on the inside, as rough surfaces tend to collect lint which will eventually clog the duct and prevent the dryer from exhausting properly. All elbows must be smooth on the inside. All joints must be made so the exhaust end of one pipe is inside the next one downstream. The addition of an exhaust pipe tends to reduce the amount of air the blower can exhaust. This does not affect the dryer operation if held within practical limits. For the most efficient operation, it is recommended that no more than 20 feet (8m) of straight 8" diameter pipe be used with two right angle elbows. When more

than two elbows are used, two feet of straight pipe should be removed for each additional elbow. No more than four right angle elbows should be used to exhaust a dryer.

Maintain a minimum of 1" (25) clearance between duct and combustible material.

If the exhaust pipe passes through a wall, a metal sleeve of slightly larger diameter should be set in the wall and the exhaust pipe passed through this sleeve. This practice is required by some local codes and is recommended in all cases to protect the wall. This type of installation should have a means provided to prevent rain and high winds from entering the exhaust when the dryer is not in use. A hood with a hinged damper can be used for this purpose. Another method would be to point the outlet end of the pipe downward to prevent entrance of wind and rain. In either case, the outlet should be kept clear, by at least 24" (810), of any objects which would cause an air restriction.

Never install a protective screen over the exhaust outlet.

When exhausting a dryer straight up through a roof, the overall length of the duct has the same limits as exhausting through a wall. A rain cap must be placed on top of the exhaust and must be of such a type as to be free from clogging. The type using a cone shaped "roof" over the pipe is suitable for this application.


Exhausting the dryer into a chimney or under a building is not permitted. In either case there is a danger of lint build-up which can be highly combustible.

Installation of several dryers where a main discharge duct is necessary, will need the following considerations for installation (see Fig. 2). Individual 8" ducts from the dryers into the main discharge duct should be at a 45 degree angle in the direction of discharge air flow.

**NOTE:** Never install the individual 8" ducts at a right angle into the main discharge duct. The individual ducts from the dryers can enter at the sides or bottom of the main discharge duct. Figure 2 indicates the various round main duct diameter to use with the individual dryer ducts. The main duct can be rectangular or round, provided adequate airflow is maintained. For each individual dryer, the total exhausting (main discharge duct plus duct outlet from the dryer) should not exceed the equivalent of 20 feet (8m) and two elbows. The diameter of the main discharge duct at the last dryer must be maintained to exhaust end.

**NOTE:** A small diameter duct will restrict air flow; a large diameter duct will reduce air velocity -- both contributing to lint buildup. An inspection door should be provided for periodic clean-out of the main duct.

**NOTE:** STATIC BACK PRESSURE should be a maximum of 0.3 in. w.c (7.6 mm w.c) at the rear exhaust outlet of the dryer. If multiple dryers are connected to the common duct, ensure the back draft damper is installed properly.

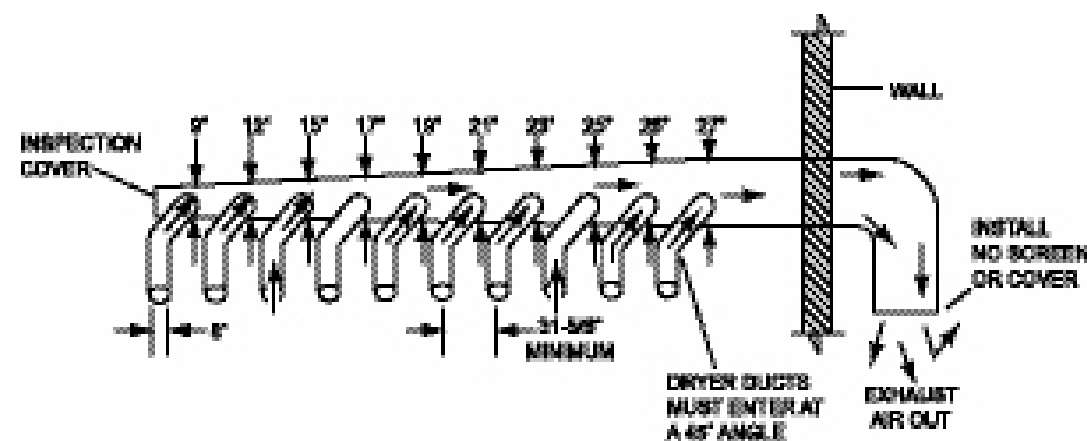

7. DRYER IGNITION (SOLID STATE IGNITION). The solid state ignition system lights the main burner gas by spark. The gas is ignited and burns only when the gas-valve relay (in the electronic controller) calls for heat. The procedure for first-time starting of a dryer is as follows:

A. First, review and comply with the "Warnings About Use and Operation" found on the inside front cover of this manual. Be sure the electrical power supply is connected correctly. The white wire is to be connected to the white wire (common) in the junction box and the black wire to the black wire (power leg). The dryer MUST be properly grounded.

B. Make sure all gas supply lines are purged of air. Close the main gas shut-off valve and wait for five minutes before turning the valve back on.

C. Turn on the main electrical power switch. The dryer may be started by following the "Operating Instructions" found later in this manual.

D. Natural gas and liquefied petroleum gas fired dryers both operate in the same manner. When the gas-valve relay contacts are closed (indicating a demand for heat), the solid state ignition control will automatically supply energy to the redundant gas valve. Spark will continue until a flame is detected by the sensing probe, but not longer than 10 seconds. If the gas fails to ignite within 10 seconds, the gas valve closes and the system will "lock out". No further attempts at ignition will be performed automatically. It is then necessary to interrupt electrical power to the ignition system before making another attempt at igniting the burners. This can be done by opening the dryer door and allowing the dryer to come to a stop for 15 seconds, then closing the door and pushing the "Start" button. The dryer will then repeat the ignition trial cycle.

8. MAIN BURNER ADJUSTMENT. The primary air shutter of each main burner must be properly adjusted for the correct air-gas ratio. Loosen the shutter locking screws. Adjust the shutter by closing it sufficiently to give a blue flame with a yellow tip. Next open the shutter until the yellow tips are at a minimum. After adjustment, securely lock each shutter in position by tightening the shutter locking screws.

## Dryer Shutdown

To render the dryer inoperative, turn off the main gas shut-off valve and disconnect electrical power to the dryer.

## Operating Instructions

1. Deposit coins to satisfy vend price display of idle dryer. Each deposit decreases vend price until display changes to show time purchased. WARM light illuminates.

2. Select drying cycle. Other cycle selections may be made now or later by pressing the appropriate key (button).

3. Close the loading door. Press [START] and the dryer will start. "Seconds" goes to [00]. "Minutes" is rounded up and will count down each minute. The colon flashes on and off indicating the timer is counting down.

4. Clothes should be removed promptly after the cycle is completed to prevent excessive wrinkling.

Once started, the "timer" cannot be stopped. However, extra coins will be acknowledged by adding time to the display. The dryer may be stopped by opening the loading door which interrupts the drive motor and gas burners. Close the loading door and push [-] to restart the dryer.

Cool-down time (owner programmable) is always part of the cycle time and is purchased by the customer. For example, if cool-down time is 2 minutes, the last 2 minutes of the cycle will have no heat.

## Description Of Controls

- Credit for coins deposited, dryer time and temperature are controlled by an electronic controller.
- The large digital display shows vend price of an idle dryer, time purchased after coins are deposited, temperature and program information.
- The three red indicator lights show the drying temperature selected. This selection may be made anytime.
- The drying temperature will be displayed when the start switch and the switch for the selected temperature are pressed at the same time.
- All programmed data is protected from power interruption of any length and the customer's individual cycle is protected for up to 3 seconds. This is done without batteries.
- The 3 temperature buttons and the start button become programming switches when the controller is in the program mode as described on page 10.

## Programming:

All operating parameters (vend price, temperatures, cool-down times, etc.) are adjustable. In addition, several displays of information are available from the controller (Money audits, hours run, dryer temperature).

The dryer is ready to run, from the factory, with the following pre-programmed data:

|                         |   |
|-------------------------|---|
| Temperature, HOT:       | 175 (degrees F) / 78 (degrees C)  |
| Temperature, MEDIUM:    | 150 (degrees F) / 63 (degrees C)  |
| Temperature, WARM:      | 125 (degrees F) / 48 (degrees C)  |
| Vend Price:             | 25 (cents)  |
| Time for Left Coin:     | 3:20 - 3 minutes, 20 seconds for a dime (doesn't apply to single-coin models) |
| Time for Right Coin:    | 10:00 (10 minutes for a quarter)  |
| Time of Free Vend:      | 10:00 ("Free Dry" cycle is 10 minutes)  |
| Cool-down Time, HOT:    | 2:00 (Cool-down time in HOT is 2 minutes)                                     |
| Cool-down Time, MEDIUM: | 2:00 (Same as above, except MEDIUM)   |
| Cool-down Time, WARM:   | 2:00 (Same as above, except WARM)   |
| Temperature Scale:      | F or C degrees  |

All of the above data can be easily changed by the owner. The changes are made by the 4 keys or buttons on the front of the control panel.

## Changing Program Data

Put dryer in PROGRAM mode as instructed on page 9. The dryer remains in the PROGRAM mode until one of these actions occur:

- The switch is actuated again.
- The fifteenth step is completed and the START switch is pushed following the fifteenth step.
- Programming is stopped for about a minute.
- The loading door is closed.

Observe the displayed value in each step. If no change is required, press START to advance to the next program step. If a change is required the values are made larger by the HOT button, smaller by the PERM-PRESS button. The hour meter and money audit can be reset to zero if WARM is pressed. Note that after any reset or program change it is necessary to advance to the next step by pressing START to enter the revision. OTHERWISE THE VALUE WILL REMAIN AS IT WAS BEFORE THE ALTERATION.

## Single Pocket Dryer


### Computer Dryer

## Description of Electronic Control

The single electronic control unit controls the coin count, dry time, temperature and information display. The digital display shows vend price when waiting for coins to be inserted and time purchased after coins have been deposited. When the tumbler is in use, the display shows the number of minutes remaining to be used. The three temperature selection buttons have indicator lights to indicate which temperature selection has been made. At the end of the cycle, the digital display flashes until the operator opens the door to remove the load. Temperature readout is available by pressing the temperature selection button that is in use along with the start button.

## Electronic Control Features Available ( shown in picture below)


1. **Anti-Wrinkle**  
After a dryer has completed its dry time, the dryer will tumble intermittently without heat, until the door is opened. This is to reduce wrinkling of the clothes. This feature may be selected by removing a jumper from the electronic control.
2. **Last Temperature Used**  
After a dryer has completed its dry time, the temperature that was being used will be selected for the next use, unless the new user selects a different one. This feature may be selected by removing a jumper from the electronic control.
3. **Battery Back-up**  
All programmed and dry time remaining data are protected from power interruption by battery back-up.

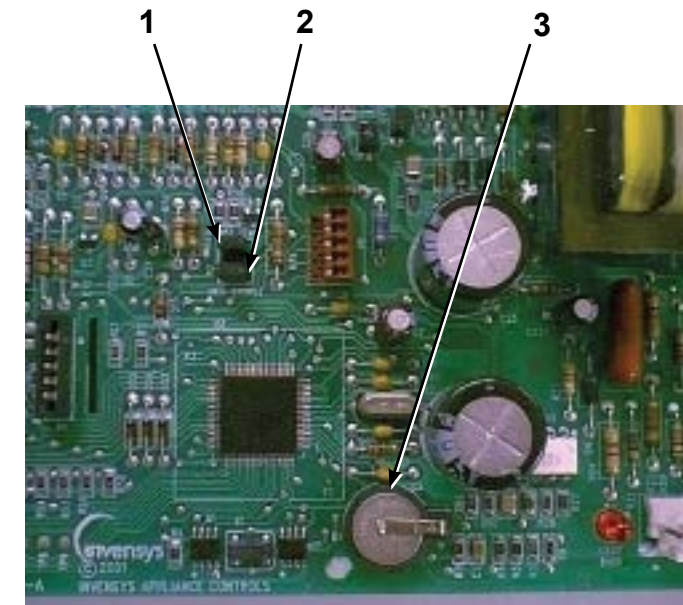

# Programming Computer Control


## ENTERING THE PROGRAM MODE

1. Unlock and open the upper service door.
2. Open the loading door.
3. Remove the metal plug found just to the left of the WARM cycle light.
4. Push the Program Button that is now accessible through a hole in the control mounting plate.
5. The control will switch to the Program mode.

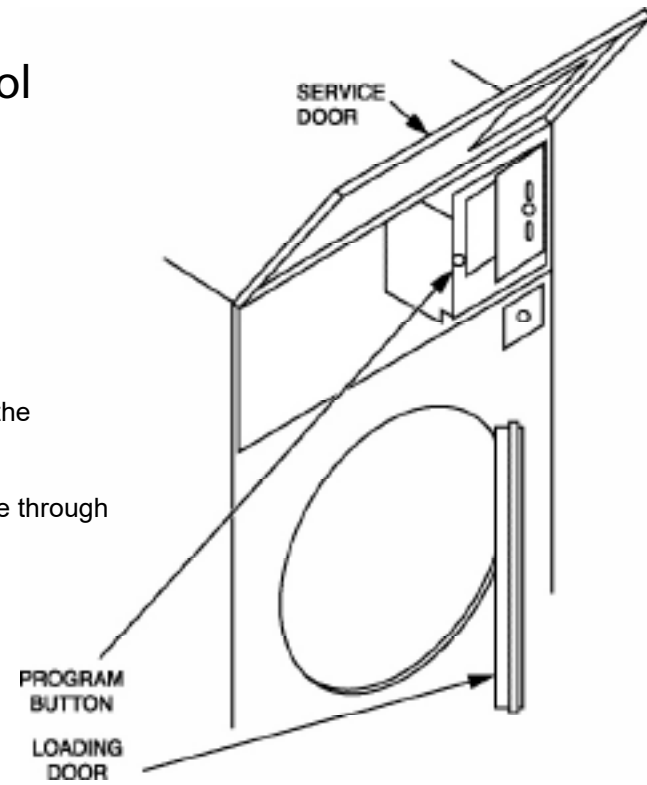


## PROGRAMMING

1. The annunciator lights in the display and temperature lights identify each programming step. (Shown on following page.)
2. The START button advances the controller to the next programming step and stores any changes to the program in memory.
3. The HOT and PERM PRESS buttons increase and decrease the values in the display.
4. The WARM button zeroes the hour meter and coin audit in program steps 1 and 2. This button also restores the original factory settings for the step being displayed in program steps 3 through 15.

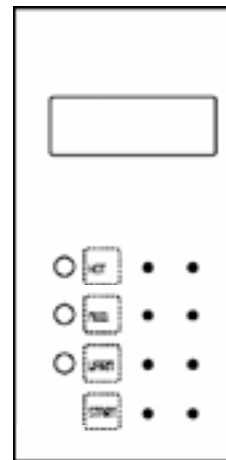

ANNUNCIATOR LIGHTS WHICH HELP IDENTIFY PROGRAMMING STEPS

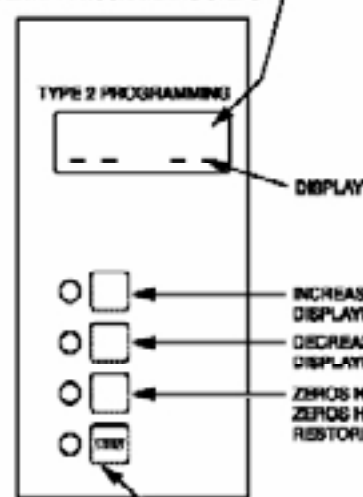

START: Stores the displayed value in memory, and advances the controller to the next programming step.

**IMPORTANT:** Please remember to push [START] to actually enter (store in memory) new data. If you merely change the display, memory hasn't yet been changed. Always push [START] after any program change before exiting the program mode.

| ORDER OF PROGRAMMING STEPS |         |                         |  | FACTORY SETTINGS |
|----------------------------|---------|-------------------------|--|------------------|
| CYCLE LIGHTS               | DISPLAY | PROGRAMMING STEP        | OPTIONS/RANGE OF LIMITS                    |                  |
|                            |         | Hour meter              | May be reset / 0 to 9999hr.                | 0                |
| ● H ● M ● W                | --      | Left Coin Audit         | May be reset / 0 to 9999 coins             | 0                |
| ● H ● M ● W                | --      | Right Coin Audit        | May be reset / 0 to 9999 coins             | 0                |
| ● H                        | --      | Temperature, Hot        | 150 to 190 degrees F (5 degree increments) | 175              |
| ● M                        | --      | Temperature, Perm Press | 120 to 170 degrees F (5 degree increments) | 150              |
| ● W                        | --      | Temperature, Warm       | 110 to 150 degrees F (5 degree increments) | 125              |
|                            | --      | Left Coin Value         | 0 to 100 cents (5 cent increments)         | \$0.10           |
|                            | --      | Right Coin Value        | 0 to 100 cents (5 cent increments)         | \$0.25           |
|                            | --      | Vend Price              | 0 to 100 (5 cent increments)               | \$0.25           |
|                            | --      | Time for Left Coin      | 0 to 99:55 min. (5 sec. increments)        | 10:00            |
|                            | --      | Time for Right Coin     | 0 to 99:55 min. (5 sec. increments)        | 10:00            |
|                            | --      | Time of Free Vend       | 0 to 99:55 min. (5 sec. increments)        | 10:00            |
| ● H                        | --      | Cool-down Time, Hot     | 0 to 10 minutes (5 sec. increments)        | 2:00             |
| ● M                        | --      | Cool-down Time, Medium  | 0 to 10 minutes (5 sec. increments)        | 2:00             |
| ● W                        | --      | Cool-down Time, Warm    | 0 to 10 minutes (5 sec. increments)        | 2:00             |
|                            | F       | Temperature Scale       | Celsius or Fahrenheit                      | C or F           |

Hour meter May be reset / 0 to 9999hr. 0  
H  
M Left Coin Audit May be reset / 0 to 9999 coins 0  
W  
H Right Coin Audit May be reset / 0 to 9999 coins 0  
M  
W  
H Temperature, Hot 150 to 190 degrees F 175  
(5 degrees increments)  
M Temperature, Perm Press 120 to 170 degrees F 150  
(5 degree increments)  
W Temperature, Warm 110 to 150 degrees F 125  
(5 degree increments)  
Left Coin Value 0 to 100 cents \$.10  
(5 cent increments)  
Right Coin Value 0 to 100 cents \$.25  
(5 cent increments)  
Vend Price 0 to 100 \$.25  
(5 cent increments)  
Time for Left Coin 0 to 99:55 min. 10:00  
(5 sec. increments)  
Time for Right Coin 0 to 99:55 min. 10:00  
(5 sec. increments)  
Time of Free Vend 0 to 99:55 min. 10:00  
(5 sec. increments)  
H Cool-down Time, Hot 0 to 10 minutes 2:00  
(5 sec. increments)  
M Cool-down Time, Medium 0 to 10 minutes 2:00  
(5 sec. increments)  
W Cool-down Time, Warm 0 to 10 minutes 2:00  
(5 sec. increments)  
f Temperature Scale Celsius or Fahrenheit C or F

## TRANSIENT VOLTAGE SURGE SUPPRESSORS

Like most electrical equipment your new machine can be damaged or have its life shortened by voltage surges due to lightning strikes which are not covered by factory warranty. Local power distribution problems also can be detrimental to the life of electrical components. We recommend the installation of transient voltage surge suppressors for your new equipment. These devices may be placed at the power supply panel for the complete installation and don't require and individual device for each machine.

These surge protectors help to protect equipment from large spikes and also from small ongoing spikes in the power that occur on a day to day basis. These smaller surges can shorten overall life of electrical components of all types and cause their failure at a later date. Although they can't protect against all events, these protective devices have a good reputation for significantly lengthening the useful life of electronic components.

Electronic Components are helped to have a longer useful life when they are supplied with the clean stable electrical power they like.

We are including the following names and links to a few suppliers of these devices for those who don't currently have a source.

| MANUFACTURER            | LINK   |
|-------------------------|--|
| MCG Surge Protection    | <a href="http://mcgsurge.com">mcgsurge.com</a>               |
| Eaton Corporation       | <a href="http://eaton.com/us/en-us">eaton.com/us/en-us</a>   |
| Schneider Electric      | <a href="http://se.com/us/en">se.com/us/en</a>               |
| Asco Power Technologies | <a href="http://ascopower.com/us/en">ascopower.com/us/en</a> |
| Emerson Electric Co.    | <a href="http://emerson.com/en-us">emerson.com/en-us</a>     |





---

## Section 4: Service Procedures

---

### Clothes Door Removal

**STEP 1:** The clothes door may be removed from the hinge bracket by unscrewing and removing the allen head pivot screw located at the door upper hinge point.

**STEP 2:** Next lean the door out of the top of the hinge bracket and lift the door from the bottom hinge pin.

### Clothes Door Latch Adjustment

**STEP 1:** Loosen the lock nut on the latching stud. It is located directly behind the door handle.

**STEP 2:** Open the loading door.

**STEP 3:** Screw the door catch stud in or out as necessary and then retighten the lock nut.

### Installation of Clothes Door Window & Gasket

**STEP 1:** Remove the loading door.

**STEP 2:** Place the clothes door, with its face down, on a solid surface.

**Note:** Pre-warming the gasket under a heat lamp makes the installation much easier.

**STEP 3:** Put the door glass gasket on the loading door with the ridges in the wide side up. Locate the seam at the door latching stud.

**Note:** The gasket has one narrow opening on one side and a wide opening on the other. The narrow side mounts to the door. The wide side holds the glass. The wide side has ridges on one interior lip. This ridged side should go up with the door laying face down.

**STEP 4:** Coat the inside and outside of the gasket with rubber lubricant or liquid soap.

**STEP 5:** Slide the glass into the middle of the gasket with half of the glass above the door and half below the door.

**STEP 6:** While pressing on the glass, use a modified screwdriver (grind the end off so that it is round and put a slight bend in it) and run it around half of the glass.

**STEP 7:** With half of the glass installed, turn the door over and repeat step 6.

**STEP 8:** Insert the modified screwdriver at the 6 o'clock position and pry the glass up enough to install the door glass support spacer (small diameter rubber tube).

## Door Switch Removal & Installation

**STEP 1:** The door switch is located directly behind the hinge plate of the loading door assembly. Open the door for access to the switch area. Remove the two screws holding the switch cover in position. This will allow the removal of the cover and the switch actuator plate. between the thermostat and bracket which must be used to give proper operation.

**STEP 2:** The entire switch box can now be pulled from the front panel opening, creating access to the door switch mounting screws.

**STEP 3:** Remove these two mounting screws and twin nut which frees the door switch and insulating shield. Remove wires.

**STEP 4:** When installing the door switch make certain the insulating shield is reassembled.

**STEP 5:** The actuator plate and switch box cover should be assembled as illustrated in the parts section of this book.

## Door Switch Operation & Testing

The normally open door switch must be closed (0 ohms resistance) for the motor and heat circuits to operate. When the door is opened, the door switch breaks the 24 volt control circuit.

## Door Switch Adjustment

**STEP 1:** Remove the two switch box cover screws.

**STEP 2:** Remove the switch cover and actuator plate.

**STEP 3:** Pull the entire switch box out from the opening in the front panel.

**STEP 4:** Loosen the bottom door switch mounting screw.

**STEP 5:** A slotted mounting allows the switch to slide in or out for adjustment.

## High Limit Thermostat Locations & Functions

### Burner Housing

This hi-limit is located on the left side of the burner housing.

**STEP 1:** The thermostat opens the circuit to the main burners in the event of malfunction in the gas control area or temperature control. This thermostat will open quickly if there is a significant loss of air flow over the burner area.

**STEP 2:** It is covered by a guard and is held in place by two screws. There are spacers between the thermostat and bracket which must be used to give proper operation.

## Manual Resettable Over Temperature Safety Thermostat

The second hi-limit thermostat is located outside the rear exhaust opening mounted on the exhaust recirculation duct at the rear outlet burner height.

**STEP 1:** The manually resettable thermostat limits the operating temperature a dryer can reach should some abnormal situation occur.

**STEP 2:** Should the thermostat be tripped, the dryer will cease to heat until the thermostat is reset. Once the dryer cools, the thermostat may be reset by inserting a pencil or stick through the opening in the thermostat cover and pushing the button in.

**REMOVAL:** To remove the manual resettable over temperature safety thermostat on the exhaust recirculation duct, remove cover mounting screws holding its respective guard. Next, remove the terminals of each wire attached to the thermostat. Lastly, remove mounting screws holding the thermostat to the recirculation boot.

## Pressure Regulator Adjustment

Use the following procedure whenever it is necessary to check the pressure regulator setting. NOTE: Any adjustment of the pressure regulator must be made with a manometer attached at the plug in the main burner manifold.

**STEP 1:** Shut off the gas supply to the dryer.

**STEP 2:** Remove the 1/8" pipe plug from the end of the main burner manifold.

**STEP 3:** Attach a manometer to the manifold end.

**STEP 4:** Remove the pressure regulator cover screw on the gas valve.

**STEP 5:** Open the shut-off valve, and operate the dryer.

**STEP 6:** Adjust the pressure for a manometer reading of 3.5" water column gas pressure. (11.0" for L.P.)

**NOTE:** The main burners must be operating when adjusting the pressure regulator.

**STEP 7:** Shut off the gas supply to the dryer. Remove the manometer and install the 1/8" pipe plug in the manifold.

**STEP 8:** Open the shut off valve, start the dryer and check for gas leaks while the burners are ignited.

## Front Panel Removal

To remove the front panel, first remove the loading door from the panel. Then remove the two left side screws and the four right side screws. The trim does not have to be removed. (The panel may be removed with the door left in place, although it is much heavier and more awkward to do so.)

**NOTE:** Always remove power from the machine before changing drive belts or working with the drive and fan system.

## Final Drive Belt Replacement

To replace the final drive belt turn the cylinder slowly by hand and work the belt off of the large pulley.

## Motor Drive Belt Replacement

To replace the motor drive belt the final drive belt should be removed as above. Next turn the intermediate drive pulley and work the belt off of it similarly to the above belt.

## Blower Impeller Removal

Remove the lint hood that is located inside the lower service door. Take notice of the location of the impeller location on the shaft. Remove the two set screws that hold the motor to the shaft.

## Airflow switch removal and adjustment

The air switch assembly is part of the ignition safety circuit and insures that the burner doesn't operate unless there is airflow. If this doesn't happen, ignition will not occur. The air switch assembly is located inside the lint compartment on top of the blower housing.

## Electronic Ignition Module

This machine uses an electronic spark ignition system to directly light the burners.

**STEP 1:** The electronic ignition module (gray box) is located inside the upper access door in the control box.

**STEP 2:** The red wire from the transformer provides 24 VAC through the 1.5 amp fuse and into the module to operate the entire direct ignition system.

**STEP 3:** The black colored hi-voltage wire (spark plug type) plugs onto the post connector on the module, and the multi-wire plug fits into the side of the module.

## Spark Electrode Assembly-Removal

**STEP 1:** Remove electrode cover and disconnect wires to electrodes.

**STEP 2:** Remove two screws to detach electrode assembly.

**NOTE:** Proper grounding of the ignition system (yellow wires) is very critical for proper ignition sequence

If there is no spark or intermittent spark, check black hi-voltage lead wire for damage or cracks in insulation. *This lead wire must not be taped or connected to any metal edges along its length to prevent pinching and arcing. Also, do not bundle this wire with other wires.*

**NOTE:** Spark gap and electrode location are important. If the electrode is damaged or mounting is changed the spark gap may not be correct for ignition to occur. Check for cracks in the ceramic insulator. Replace electrode assembly if necessary. Also check for carbon or foreign material on the electrodes and clean if necessary.

## Gas Valve & Manifold Removal

**STEP 1:** Disconnect union at gas valve and disconnect wires from gas valve operator coils.

**STEP 2:** Remove right manifold mounting bracket screws and slide manifold to remove from left bracket.

## Spark Electrode Assembly-Function


1. The spark electrode and sensing electrodes are located directly at the side of the burner housing.
2. The electrode with the black hi-voltage wire conducts the spark to the center grounding probe, directly over the burner.
3. The electrode with the black sensing wire detects ignition and monitors flame by signaling the module.

**NOTE:** Proper grounding of the ignition system (yellow wires) is very critical for proper ignition sequence.

## Ignition System-Function & Sequence

During normal dryer operation, the following occurs:

1. The dryer electronic control calls for heat.
2. From the 24VAC control transformer, voltage for the heat circuit is applied to the control through the door switch. If the control detects that the heat should be on, a circuit is closed providing power through the over-temp thermostat, the air damper switch and the motor centrifugal switch to the Ignition Module. Once the 24VAC reaches the ignition module on the red wire, sparking occurs at the ignition electrode and 24VAC is applied to open the Gas Valve.
3. Once the flame is established, the sensing electrode detects the presence of flame and the sparking stops.
4. If for any reason the flame is not established in a period of 10 seconds, the electronic control will try this sequence for 3 tries. Normally the 10 seconds "Trial For Ignition" period is ample to establish and prove flame.
5. If the flame is shutdown or blown out during operation, the ignitor will immediately go into "Trial. For Ignition" again for 10 seconds.
6. However, at the end of 3 separate retries of 10 seconds "Trial for Ignition", the flame is not established, the ignition system goes into "Safety Lock-Out" and will not reactivate the "Trial for Ignition" until there is a current interruption for a period of 15 seconds. This interruption can be provided by opening the dryer loading door and allowing the machine to come to a complete stop for 15 seconds.

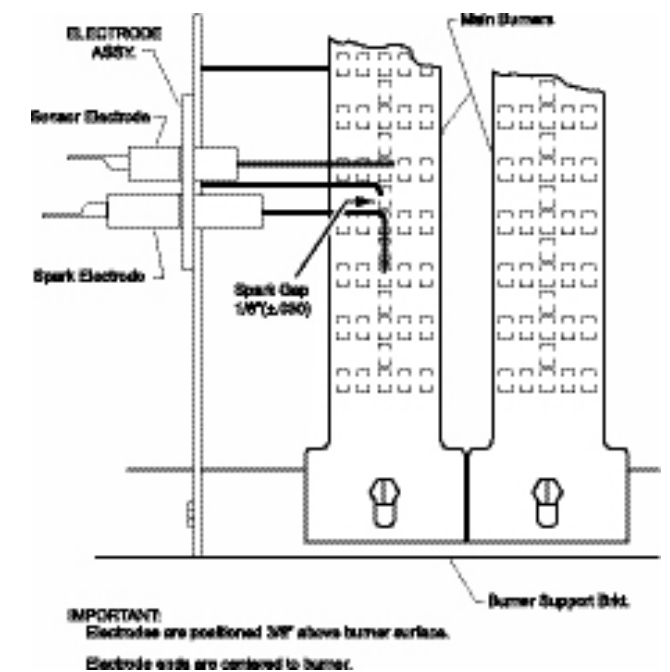

---

## Main Burner Orifice Removal

**STEP 1:** Remove manifold and gas valve assembly as above.

**STEP 2:** Using an open end wrench, remove orifices from manifold.

## Main Burner Removal

Remove manifold & gas valve assembly as previously discussed. Remove the screw securing the front of the burner to the support bracket. The burner may now be removed.

## Cylinder Pulley Removal

Remove nut holding pulley to cylinder shaft. Pull pulley straight off of shaft.

## Intermediate Pulley Removal

The intermediate pulley can be removed by removing the snap ring holding the pulley to the tension arms.

## Tension Arm Assembly Removal

The tension arm assembly may be removed by removing the snap ring that holds it to the tension arm support assembly pin. If it is necessary the arm assembly is replaced as a complete unit.

## Tension Arm Support Assembly Adjustment

The tension arm support assembly may be adjusted for alignment of the intermediate pulley and also to align the belts. The three outer nuts allow the alignment of the pin to be adjusted by pivoting the assembly on the center bolt. The center bolt can be screwed in to allow bringing the complete assembly farther back if necessary for belt alignment.

## Cylinder Removal

**STEP 1:** Remove the front panel in front of the cylinder.

**STEP 2:** Remove drive belt, nut, pulley, and shaft key.

**STEP 3:** Pull the cylinder from the front of the machine.

---

## Adjustment of Cylinder Assembly

**STEP 1:** Loosen the two top adjusting bolts and two bottom adjusting nuts and lock nuts holding the bearing housing to the drive plate.

**STEP 2:** Loosen the four mounting bolts on the side channels.

**STEP 3:** Open the clothes door and insert a 1/2" thick shim at the 3 and 9 o'clock positions and a 1/4" thick shim at the 6 o'clock position.

**STEP 4:** Tighten the two bottom adjusting nuts and tighten locking nuts.

**STEP 5:** Tighten the bottom right mounting bolt, then the top left mounting bolt. Tighten the remaining two bolts. (Shim where and if necessary.)

**STEP 6:** Tighten the two top adjusting bolts.

**STEP 7:** Remove all the shims from between the front panel flange and cylinder (3,6,9 and 12 o'clock).

**STEP 8:** Spin the cylinder to check for rubbing baffles, pressing down hard while rotating. If rubbing is detected, repeat procedure paying particular attention to placement of shims between bearing housing and side channels.

## Bearing Housing Removal

After removing cylinder as previously outlined, simply unbolt the bearing housing and remove.

## Section 5: Trouble Shooting

## Section 5: Trouble Shooting - Gas Heated

| Symptom                                | Probable Cause                   | Suggested Remedy   |
|--|----------------------------------|--|
| Tumbler does not turn                  | Drive belts                      | Check both drive belts   |
|  | Drive motor                      | Check capacitor and motor  |
|  | Door switch                      | Check door switch contacts and adjustment  |
|  | Micro control                    | Check that LED's are lit and green start key pushed                              |
|  | Motor Relay                      | Check motor relay coils (24v) and contacts.                                      |
| Tumbler turns but no spark temperature | Temperature                      | Check for selected in formula at burner  |
|  | Spark Electrode                  | Check electrode for damage to electrode or mounting                              |
|  | Temperature Sensor               | Check by plugging in good sensor   |
|  | Ignition Transformer             | Check for 24 V out of transformer to ignition control                            |
|  | Ignition control Air flow switch | Try another control Check for circuit through air flow switch                    |
|  | Hi-limit                         | Check hi-limit   |
|  | Over-temp                        | Check by inserting pencil eraser side thru (Manual Reset) hole and push to reset |
|  | Gas supply                       | No gas can cause system lockout check for W.C.                                   |

| Symptom                                | Probable Cause          | Suggested Remedy  |
|--|-------------------------|---|
| Tumbler turns ignition sparks no flame | Gas supply              | Make sure gas supply is working   |
|  | Gas pressure            | Make manometer check of gas pressure for 3.5"W.C. natural 11"W.C. propane                                   |
|  | Spark electrode         | Check electrode for damage to electrode or mounting   |
|  | Gas valve               | Check coil continuity, replace valve if bad   |
| Slow drying                            | Thermostat              | What is temperature set at on control   |
|  | Air flow Restrictions   | Follow installation guidelines for static back pressure and make up air                                     |
|  | Lint screen             | Clean screen  |
|  | Exhaust                 | Check complete exhaust system for excessive back pressure in the duct work. No more than .3 static pressure |
|  | Makeup air              | Check for adequate makeup air (1.25 sq. Ft.)  |
|  | Temp sensor             | Clean or replace sensor if necessary  |
|  | Gas                     | Gas pressure at burner should be ( 3.5" W.C.) while burning   |
|  | Blower Impeller         | Check impeller for operation and check mounting set screw   |
|  | Steam & Electric Heated | Check relay for activation. Check steam Check steam valve for steam trough                                  |

## Dryer Fault Codes

| FAULT# | FAULT DESCRIPTION         | ACTION   |
|--------|---------------------------|--|
| F1     | Shorted thermostat sensor | Dryer stops and "F1" flashes on the 4- digit display. When short circuit on sensor input is removed, "LOAD" appears on the 4-digit display and the remaining dry time is reset.  |
| F2     | Open thermostat sensor    | Dryer stops and "F2" flashes on the 4-digit display. When a good sensor is connected to sensor input, "LOAD" appears on the 4-digit display and the remaining dry time is reset.   |
| F3     | EEPROM corrupted.         | Dryer will not start and "F3" appears on the 4-digit display. The power to the dryer must be cycled to reset the controller. Fault should only occur when starting a dry cycle.  |
| F4     | Gas valve on fault.       | The drying temperature did not increase 1°F. in 5 minutes. "F4" will flash on the display and the dry cycle will finish without calling for heat (energizing gas valve). Opening the door or pressing the STOP key will reset the fault and clear the remaining time in the dry cycle. |
| F5     | Temperature fault.        | The drying temperature is at least 25°F. above the temperature setting. "F5" will flash on the 4-digit display and the dry cycle will finish without calling for heat (energizing the gas valve). The power to the dryer must be cycled to reset the controller.                       |


## Kits, Assemblies, & Common Parts

| Coin Acceptor Components    | Part Number  |
|-----------------------------|--------------|
| Mechanical Coin Acceptor    | 9021-002-016 |
| Coin Drop Screws            | 9545-053-002 |
| Retainer, Coin Acceptor     | 9486-149-001 |
| Loading Door Components     | Part Number  |
| Door Handle                 | 9244-082-001 |
| Door Close Switch           | 9539-461-001 |
| Electrical Components       | Part Number  |
| Transformer, Control        | 8711-007-001 |
| Transformer, Ignition       | 8711-002-001 |
| Controls                    | 9471-010-002 |
| Heating Circuit Components  | Part Number  |
| Ignition Control Module     | 9857-116-003 |
| Ignition Electrode Assembly | 9875-002-003 |
| Thermostat, Hi-Limit        | 9576-203-002 |
| Thermostat, Overtemp        | 9576-207-006 |
| Fuseholder                  | 9200-001-002 |
| Fuse 1.5 amp                | 8636-018-001 |
| Airflow Switch              | 9539-461-009 |
| Cabinet Components          | Part Number  |
| Cleanout Duct Assembly 8"   | 9973-034-001 |

## Section 6: Parts Data


## Cabinet Group

| Key | Part Number  | Description  | Qty |
|-----|--------------|--|-----|
| •   | 9960-256-021 | Door Assembly, Loading Complete-WHT                | 1   |
| •   | 9960-256-022 | Door Assembly, Loading Complete-ALM                | 1   |
| •   | 9960-256-025 | Door Assembly, Loading Complete-SS                 | 1   |
| 1   | 9960-255-007 | Door Assembly Only, Loading SS                     | 1   |
| 2   | 9982-280-002 | Plate Assembly, Hinge-WHT                          | 1   |
| 2   | 9982-280-005 | Plate Assembly, Hinge-ALM                          | 1   |
| 2   | 9982-280-011 | Plate Assembly, Hinge-SS                           | 1   |
| •   | 9545-012-015 | Screw, Hinge to Door #10-32x 3/8                   | 4   |
| •   | 8640-413-002 | Nut, Hinge to Door #10-32UNF                       | 4   |
| 3   | 9212-002-003 | Glass, Door  | 1   |
| 4   | 9206-164-009 | Gasket, Glass                                      | 1   |
| •   | 9548-117-000 | Support, Door Glass (inside Gasket)                | 3   |
| 5   | 9206-420-002 | Gasket, Outer Rim                                  | 1   |
| 6   | 9244-082-001 | Handle, Loading Door                               | 1   |
| •   | 9545-018-017 | Screw, Handle 1/4" 20 x 3/8"                       | 2   |
| •   | 9531-033-001 | Stud, Door Catch                                   | 1   |
| •   | 8640-413-001 | Nut, Hex   | 1   |
| •   | 8640-413-003 | Nut, Acorn # 10-32                                 | 1   |
| •   | 9086-015-002 | Catch, Loading Door                                | 1   |
| •   | 8638-190-009 | Rivet, Pop-Catch loading door                      | 2   |
| 7   | 9454-569-005 | Panel Assembly, Front WHT                          | 1   |
| 7   | 9454-569-008 | Panel Assembly, Front ALM                          | 1   |
| 7   | 9454-569-010 | Panel Assembly, Front SS                           | 1   |
| 8   | 9108-084-010 | Door, Upper Service WHT                            | 1   |
| 8   | 9108-084-013 | Door, Upper Service ALM                            | 1   |
| 8   | 9108-084-014 | Door, Upper Service SS                             | 1   |
| 9   | 9578-085-001 | Trim, Upper Service Door                           | 1   |
| •   | 9491-009-001 | Rivet, Drive-Door Hinge                            | 2   |
| •   | 8641-581-005 | Washer, Flat 3 /16                                 | 2   |
| •   | 9548-268-001 | Support, Upper Door                                | 1   |
| •   | 8650-006-003 | Lock w/nut Lower Service Door                      | 1   |
| •   | 6292-006-006 | Key, Service Lock (FJWCC)                          | 1   |
| 10  | 9412-083-001 | Nameplate, Commerical Dryer                        | 1   |
| •   | 9545-012-003 | Screw, Chrome 10-32 x 1/2                          | 4   |
| •   | 8641-436-004 | Washer, Fiber                                      | 4   |
| •   | 8641-582-019 | Lockwasher #10                                     | 10  |
| •   | 8640-399-001 | Nut, Spring U Type 10Z-Front Panel Clips           | 6   |
| 11  | 9544-047-002 | Strap, Hinge-WHT                                   | 1   |
| 11  | 9544-047-005 | Strap, Hinge-ALM                                   | 1   |
| 11  | 9544-047-007 | Strap, Hinge-SS                                    | 1   |
| •   | 9545-012-028 | Screw, Hinge To Panel 10T-32 x 1/2                 | 4   |
| 12  | 9545-052-001 | Screw, Door to Hinge Strap (special)               | 1   |
| •   | 8641-436-003 | Washer, Fiber/Plastic VSCO on Door Hinge (special) | 1   |
| 13  | 9960-243-022 | Door Assembly, Lower Service WHT                   | 1   |
| 13  | 9960-243-025 | Door Assembly, Lower Service ALM                   | 1   |
| 13  | 9960-243-026 | Door Assembly, Lower Service SS                    | 1   |
| 14  | 9578-081-002 | Trim-Handle, Lower Service Door                    | 1   |
| •   | 9545-008-021 | Screw, Pn Hd Cr-#10 x 3/8                          | 1   |
| 15  | 9578-084-001 | Trim, Kick-Lower Service Door                      | 1   |
| *   | 9472-001-013 | Cabinet Touch Up Paint (White)                     | 1   |

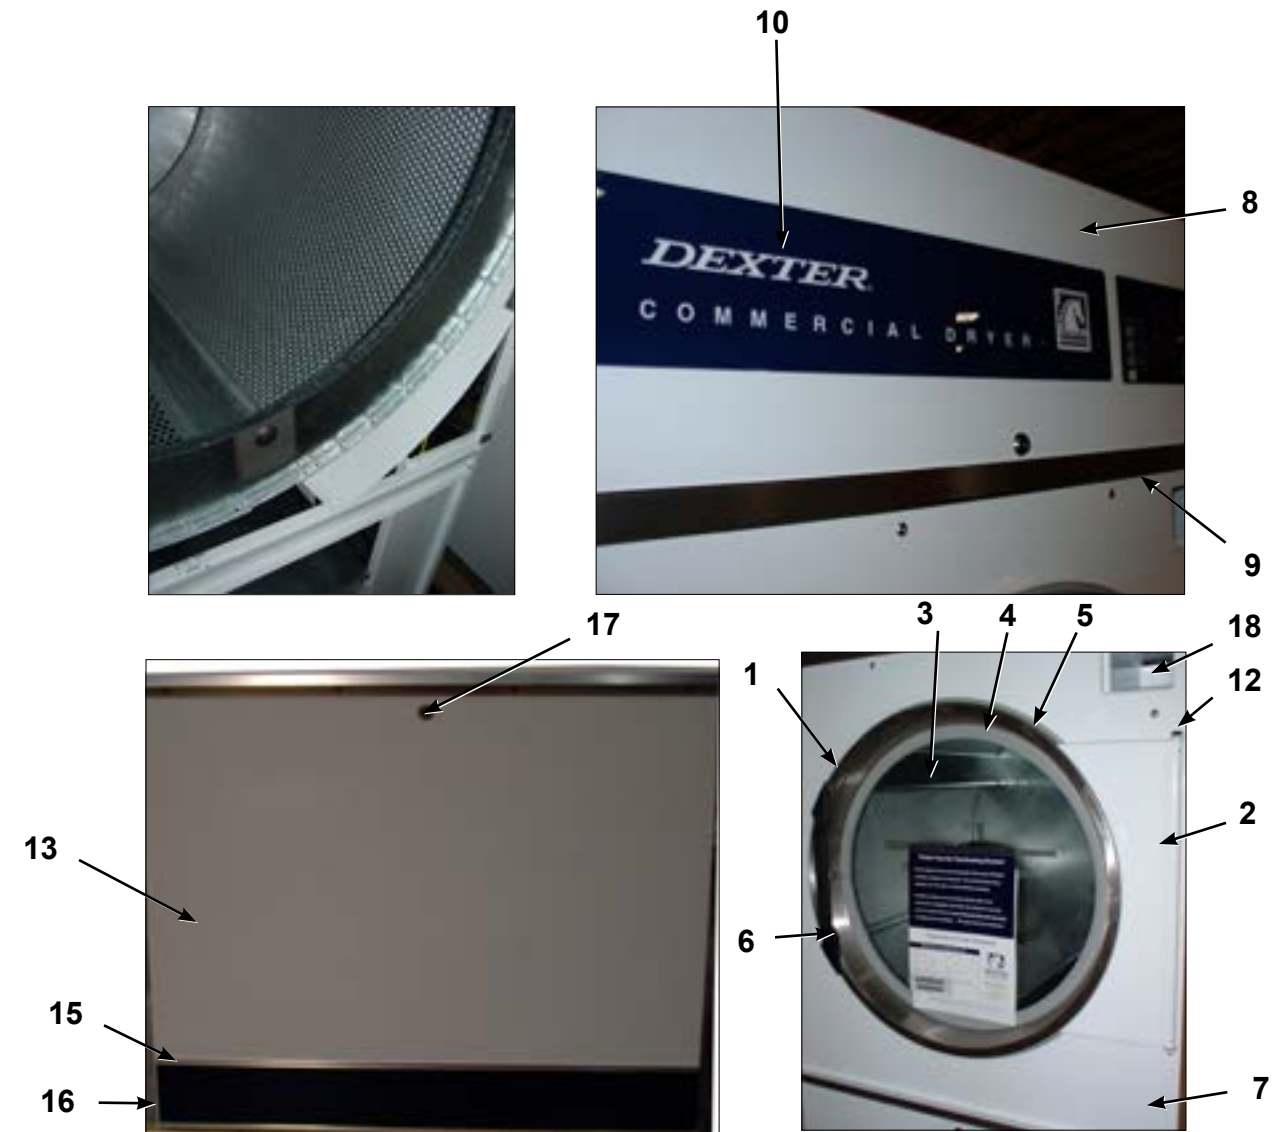


| Key | Part Number  | Description                                     | Qty |
|-----|--------------|---|-----|
| 16  | 9435-004-001 | Overlay, Trim Kick                              | 1   |
| •   | 9545-008-010 | Screw, Tr Hd Cr #10 x 1/2 BLK                   | 3   |
| 17  | 8650-006-003 | Lock w/nut Lower Service Door                   | 1   |
| •   | 8502-617-001 | Label-Made in the USA                           | 1   |
| 18  | 9942-027-002 | Vault Assembly, Coin - SS                       | 1   |
| 18  | 9942-027-004 | Coin Vault Assembly White                       | 1   |
| 18  | 9942-027-003 | Coin Vault Assembly Almond                      | 1   |
| •   | 9807-099-001 | Box Assembly Coin Vault ESD W/lock & Key Chrome | 1   |
| •   | 9277-041-002 | Insulation Side Pannel                          | 1   |
| •   | 9277-041-004 | Insulation Side Pannel                          | 1   |
| •   | 9277-047-001 | Insulation 1/4" Black Top LH Side Burner Area   | 1   |
| •   | 9277-047-002 | Insulation 1/4" Black Service Door              | 1   |
| •   | 8544-006-001 | Leg, Leveling                                   | 4   |
| *   | 8545-061-002 | Leveling Leg Wrench                             | 1   |
| •   | 9545-008-003 | Screw, #10 x 1/2 TEK                            | 8   |
| •   | 9074-236-001 | Cover, Cabinet                                  | 1   |
| *   | 8640-413-004 | Nut, Elastic Stop                               | *   |

## Front Control Housing Group

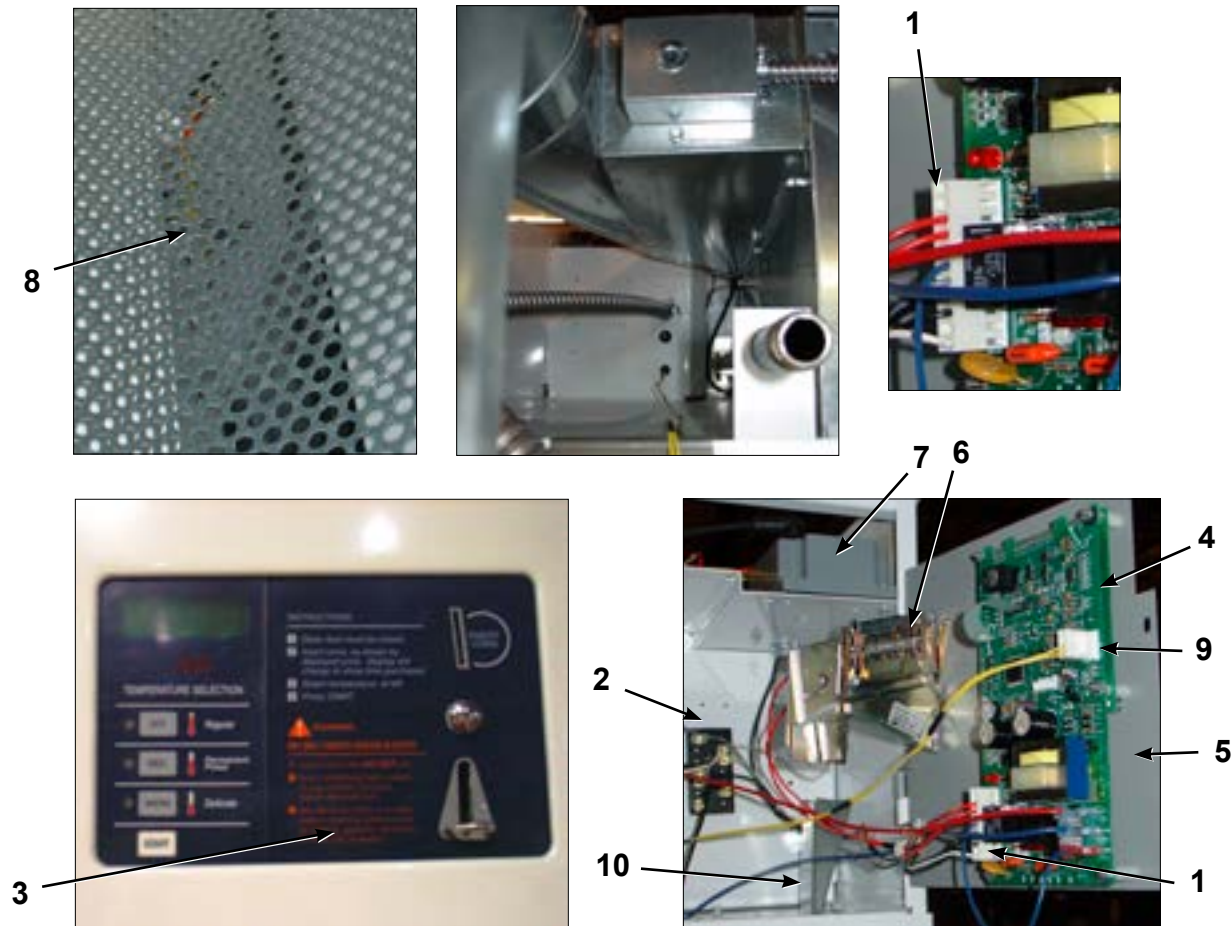

| Key | Part Number  | Description                                    | Qty |
|-----|--------------|--|-----|
| 1   | 9627-651-002 | Harness Assembly, Micro                        | 1   |
| 2   | 9897-026-001 | Terminal Block Assembly                        | 1   |
| •   | 9545-031-004 | Screw, 6AB x 3/8" (for Terminal Block)         | 2   |
| 3   | 9801-077-001 | Membrane, Switch Assembly                      | 1   |
| 4   | 9471-010-002 | PCB Board Control                              | 1   |
| •   | 8651-053-003 | Plug, Button                                   | 1   |
| 5   | 9982-305-002 | Plate Assembly, Control Mounting               | 1   |
| •   | 9451-146-005 | Pin-Hinge Meterplate                           | 2   |
| 6   | 9021-002-016 | Acceptor-Coin 25¢                              | 1   |
| •   | 9054-045-001 | Fuse Holder                                    | 1   |
| •   | 8636-018-001 | Fuse 1.5 Amp                                   | 1   |
| •   | 8711-002-001 | Transformer-Control                            | 1   |
| 7   | 9857-116-003 | Control, Ignition                              | 1   |
| •   | 9627-650-001 | Harness Assembly, Low Voltage                  | 1   |
| •   | 9631-403-001 | Wire Assy High Voltage (From Ignition Control) | 1   |
| 8   | 9501-004-002 | Temperature Sensor                             | 1   |
| 9   | 9627-679-002 | Wire Harness, Temp Sensor                      | 1   |
| •   | 8640-276-005 | Nut, Wire connector 71B, BLK                   | 2   |
| •   | 9452-614-001 | Bracket Sensor Mounting                        | 1   |
| •   | 9545-045-005 | Screw, Mounting Bracket 8B x 1/4               | 1   |
| 10  | 9940-013-001 | Coin Chute Assembly                            | 1   |

## Drive Group



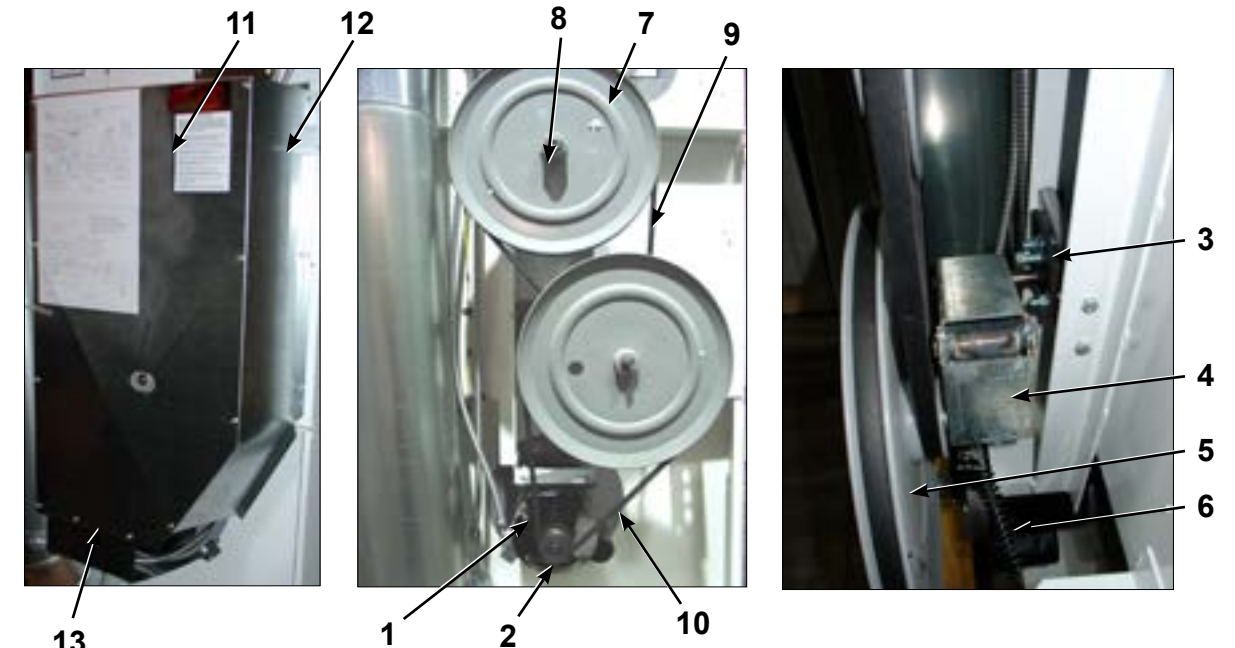


| Key | Part Number  | Description                                 | Qty |
|-----|--------------|---|-----|
| 1   | 9376-259-006 | Motor, Drive AO Smith before serial #210650 | 1   |
| *   | 9732-205-006 | Motor Replacement Kit                       | 1   |
| *   | 5191-106-001 | Capacitor, AO Smith Motor Start             | 1   |
| 1   | 9376-311-001 | Motor, Marathon after serial #210650        | 1   |
| *   | 5191-107-001 | Capacitor, Marathon Motor Start             | 1   |
| •   | 9545-014-004 | Screw, Hx 5/16-18 x 5/8                     | 4   |
| •   | 8640-400-003 | Nut 5/16 - 18                               | 4   |
| 2   | 9453-157-001 | Pulley - Motor                              | 1   |
| •   | 9545-028-013 | Screw, Set                                  | 2   |
| 3   | 9991-053-002 | Support Assembly, Intermediate Pulley       | 1   |
| •   | 9545-029-010 | Bolt, Rd Hd, 3/8-16 x 1 1/4                 | 3   |
| •   | 9545-029-012 | Screw, 3/8-16 x 1 1/2                       | 1   |
| •   | 8640-415-004 | Nut, 3/8-16                                 | 3   |
| •   | 8641-581-035 | Washer, Flat                                | 3   |
| 4   | 9861-022-001 | Arm Assembly-Tension Complete               | 1   |
| *   | 9861-015-001 | Tension Arm (Short) DLC30 Only              | 1   |
| *   | 9861-016-001 | Tension Arm DLC30 Only                      | 1   |
| 5   | 9908-039-001 | Pulley Assembly, Intermediate-W/Bearings    | 1   |
| •   | 9036-145-002 | Bearings, Bronze Flange                     | 2   |
| •   | 9487-200-003 | Ring, Retaining                             | 3   |
| 6   | 9534-319-002 | Spring, Belt Tension                        | 1   |
| •   | 8641-581-035 | Washer, Flat                                | 2   |
| 7   | 9908-040-001 | Pulley Driven                               | 1   |
| •   | 9306-006-000 | Key, Woodruff                               | 1   |
| 8   | 8640-222-000 | Nut, 1"-14                                  | 1   |
| •   | 8641-582-015 | Washer,Lock Internal Tooth                  | 1   |
| 9   | 9040-073-004 | Belt, Final Drive                           | 1   |
| 10  | 9040-077-002 | Belt, Motor Drive                           | 1   |
| 11  | 9208-065-001 | Guard, Drive                                | 1   |
| *   | 9545-008-024 | Guard Screws                                | *   |
| 12  | 9454-596-002 | Pannel, Drive Guard, RH                     | 1   |
| •   | 9454-595-002 | Pannel, Drive Guard, LH                     | 1   |
| 13  | 9550-190-001 | Shield, Motor                               | 1   |
| •   | 9545-008-003 | Screw 10-16 x 1/2, TEK                      | 2   |



## Burner Housing Group


| Key | Part Number  | Description                                   | Quantity |
|-----|--------------|---|----------|
| 1   | 9803-163-002 | Housing Assembly, Burner Welded               | 1        |
| •   | 9545-008-024 | Screw 10AB x 3/8                              | 2        |
| 2   | 9048-018-001 | Burner, Main                                  | 3        |
| •   | 9545-008-008 | Screw 10 T-32 x 1/4"                          | 3        |
| 3   | 9875-002-003 | Electrode, Ignition                           | 1        |
| •   | 9985-161-001 | Bracket Assembly, Electrode Mounting          | 1        |
| •   | 9545-008-024 | Screw, Electrode Mtg 8B x 10x 3/8"            | 2        |
| 4   | 9857-134-001 | Control Assy, Gas                             | 1        |
| 5   | 9381-009-001 | Manifold, 2 port                              | 1        |
| •   | 9425-069-002 | Orifice, Burner-Natural #30                   | 2        |
| •   | 9425-069-003 | Orifice, Burner-LP #48                        | 2        |
| 6   | 9576-203-002 | Thermostat, Hi-Limit                          | 1        |
| •   | 9538-142-001 | Spacer, Hi-Limit                              | 2        |
| •   | 9545-045-007 | Screw 8B x 3/4"                               | 2        |
| 7   | 9074-234-001 | Cover, Hi-Limit Stat                          | 1        |
| •   | 9545-008-024 | Screw 10 B x 3/8"                             | 1        |
| 8   | 9857-116-003 | Control, Ignition (Gray Box)                  | 1        |
| •   | 9545-044-002 | Screw 6-32 x 1"                               | 2        |
| •   | 8640-411-003 | Nut, Hex Keps 6 x 32                          | 2        |
| 9   | 9897-026-001 | Terminal Block Power (Inside Control Panel)   | 1        |
| •   | 9545-031-004 | Screw 6 AB x 5/8"                             | 2        |
| •   | 9039-915-001 | Bracket, Pipe gas line                        | 1        |
| •   | 9545-008-003 | Screw 6AB x 5/8"                              | 2        |
| 10  | 9631-403-001 | Wire Ass'y, High Voltage                      | 1        |
| 11  | 9627-650-001 | Harness, Low Voltage Ignition                 | 1        |
| 12  | 9054-045-001 | Fuseholder                                    | 1        |
| 13  | 8636-018-001 | Fuse 1.5 amps                                 | 1        |
| •   | 8711-007-001 | Transformer, Control                          | 1        |
| •   | 9545-012-009 | Screw, 10x1/2"                                | 2        |
| •   | 9732-102-003 | Kit, LP Conversion                            | 1        |
| •   | 9548-256-001 | Support, Front Burner                         | 1        |
| •   | 9545-008-008 | Screw 10T-32 x 1/2"                           | 3        |
| 14  | 9379-164-001 | Valve, Gas Shut-Off w/ brass union (Optional) | 1        |
| •   | 9458-020-003 | Pipe, Gas Line                                | 1        |
| •   | 9918-002-002 | Recirculation Boot                            | 1        |
| •   | 9545-008-024 | Screw, 10AB x 3/8"                            | 7        |
| •   | 9576-207-006 | Thermostat, Over Temp-Manual Reset            | 1        |
| •   | 9545-045-008 | Screw, 8AB x 3/8"                             | 2        |
| 16  | 9825-057-002 | Cover, Over Temp Thermostat                   | 1        |
| •   | 9545-008-024 | Screw, 10AB x 3/8"                            | 2        |

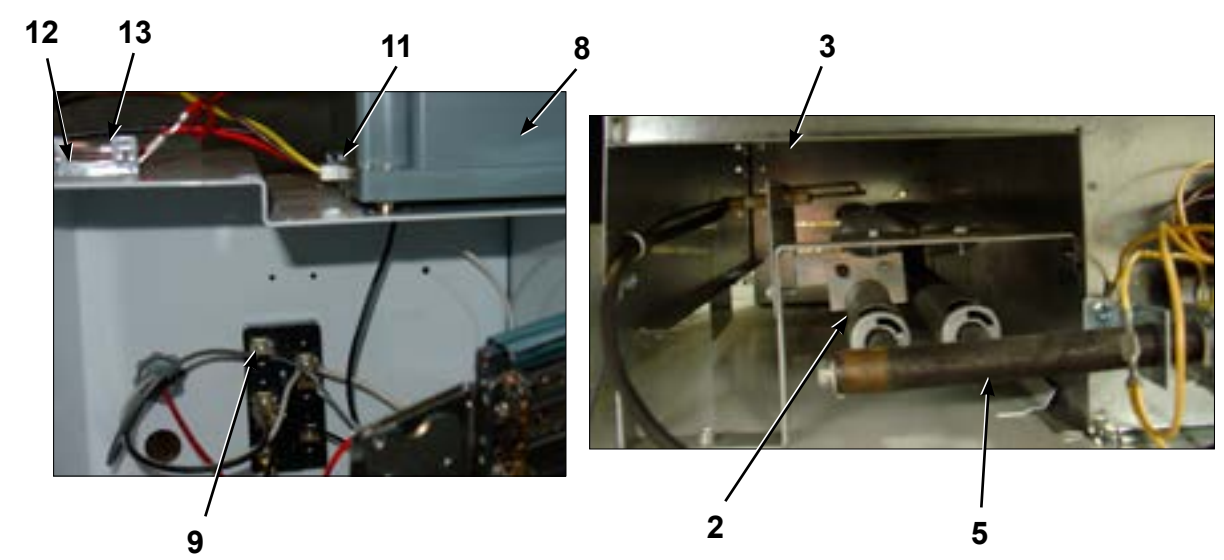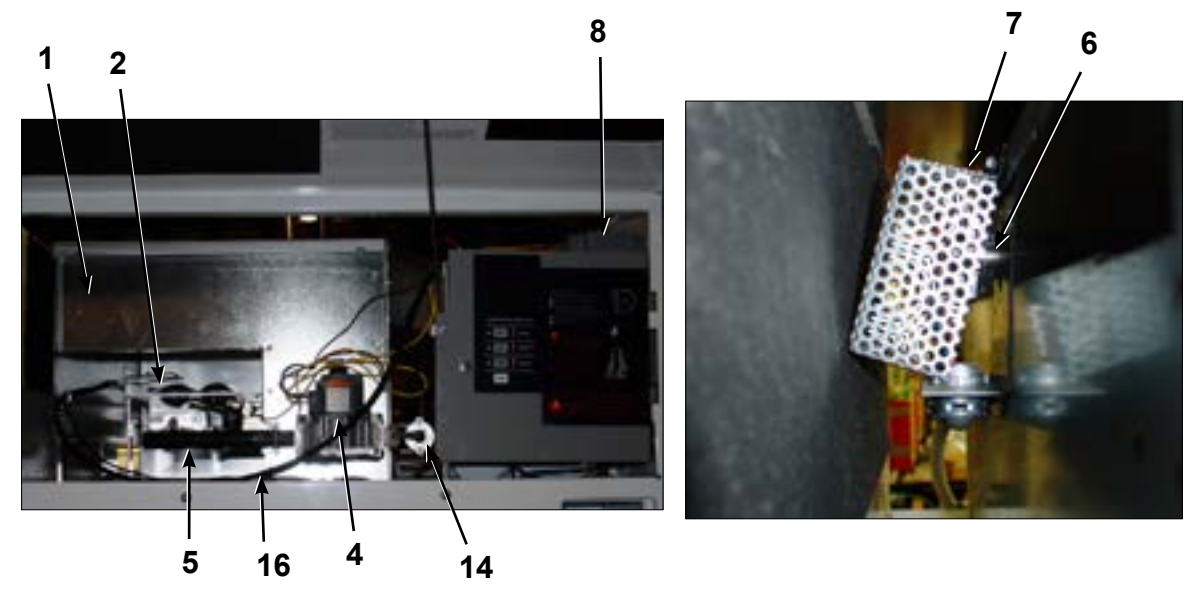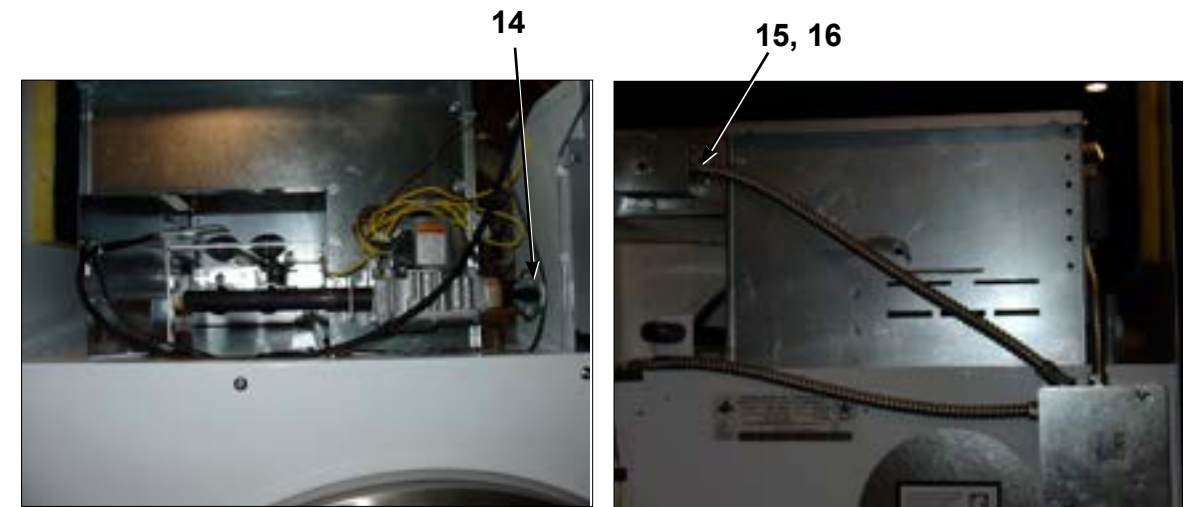

## Bearing Housing Group

| Key | Part Number  | Description  | Quantity |
|-----|--------------|--|----------|
| *   | 9803-160-002 | Housing, Bearing Ass'y w one( rear ) bearing ..... | 1        |
| 1   | 9241-161-001 | Housing, Bearing .....                             | 1        |
| 2   | 9036-130-001 | Bearing, Ball-Rear .....                           | 1        |
| *   | 9036-130-001 | Bearing, Ball-Front .....                          | 1        |
|     | 9538-139-001 | Spacer, Bearing .....                              | 1        |
| 3   | 8641-581-009 | Washer, Flat 3/8" .....                            | 4        |
| 4   | 8641-582-003 | Lockwasher spring 3/8" .....                       | 4        |
| 5   | 9545-049-002 | Screw 3/8" x 3/4" .....                            | 4        |
| 6   | 8640-415-002 | Nut, 3/8" .....                                    | 2        |
| *   | 8640-400-002 | Nut, 5/16" .....                                   | 4        |
| *   | 8640-222-000 | Nut, Tumbler Shaft .....                           | 1        |
| *   | 9306-006-000 | Key, Tumbler Shaft .....                           | 1        |
| *   | 9908-040-001 | Pulley Drive .....                                 | 1        |
| *   | 9552-013-003 | Shim .....   | 1        |
| 8   | 9545-049-001 | Screw 3/8" x 1" .....                              | 2        |


\* Not Illustrated

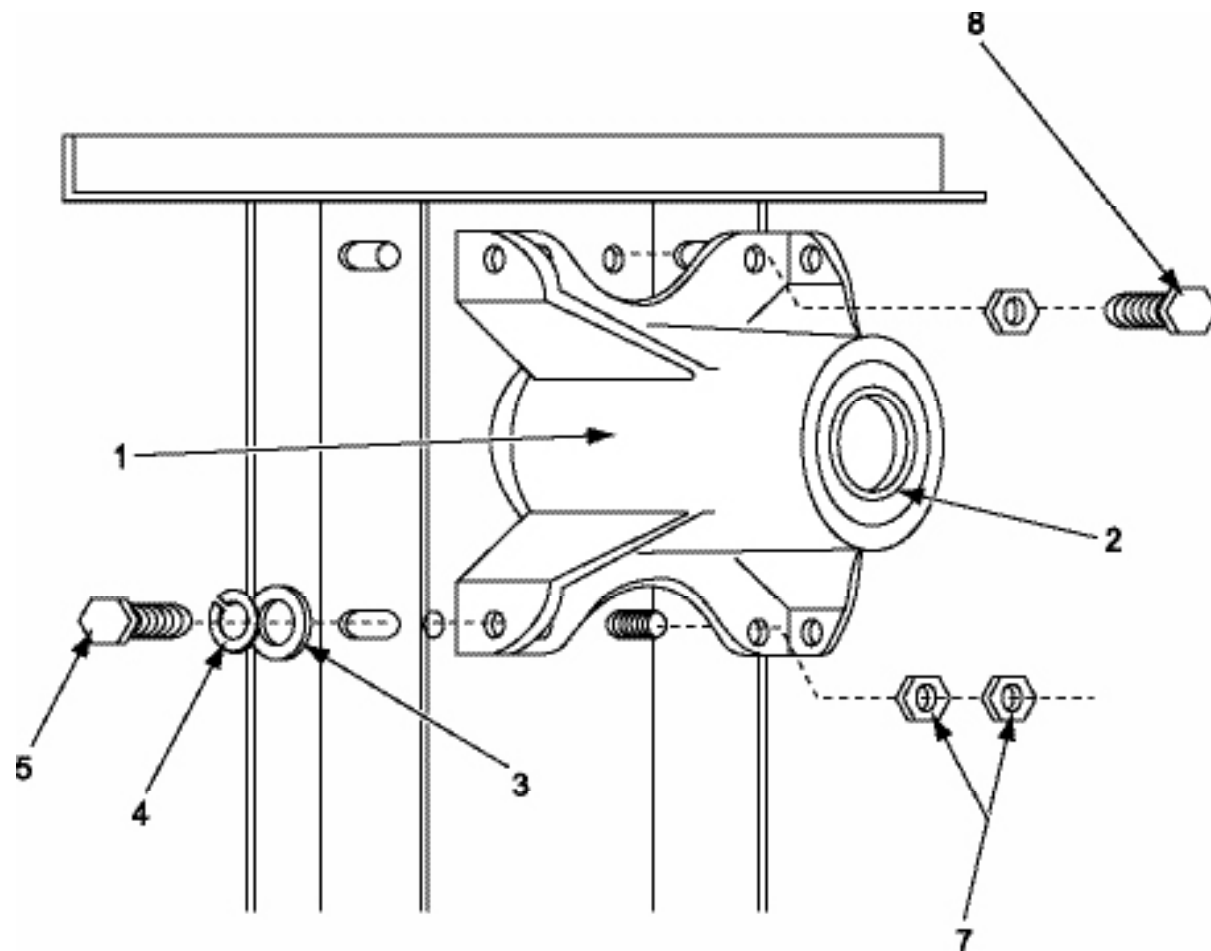


## Tumbler Basket Group

| Key | Part Number  | Description                         | Quantity |
|-----|--------------|-------------------------------------|----------|
| 1   | 9848-101-001 | Tumbler Assy .....                  | 1        |
| *   | 9848-128-002 | SS Tumbler .....                    | 1        |
| 2   | 9568-012-001 | Spider & Shaft Assy .....           | 1        |
| 3   | 9497-019-001 | Rod, Tumbler .....                  | 3        |
| 4   | 8640-415-004 | Nut, Tumbler Rod .....              | 3        |
| 5   | 9552-013-003 | Shim .....                          | AR       |
| 7   | 8641-554-001 | Washer, Tumbler Rod (special) ..... | 3        |
| 8   | 9306-006-000 | Key, Tumbler Shaft .....            | 1        |
| 9   | 8641-582-015 | Lock Washer, Tumbler Shaft .....    | 1        |
| 10  | 8640-222-000 | Nut, Tumbler Shaft .....            | 1        |
| *   | 9848-129-001 | Tumbler w/ Spider .....             | 1        |

\* Not Illustrated


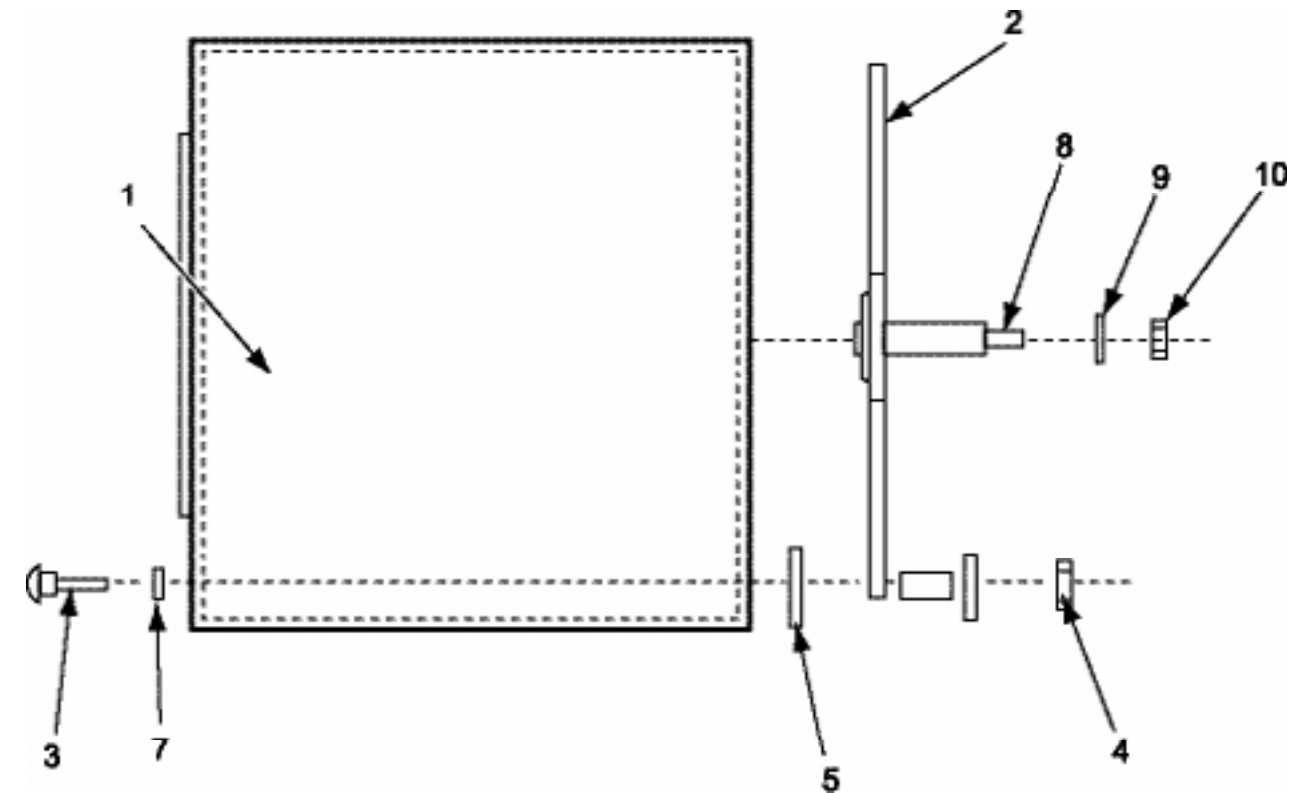


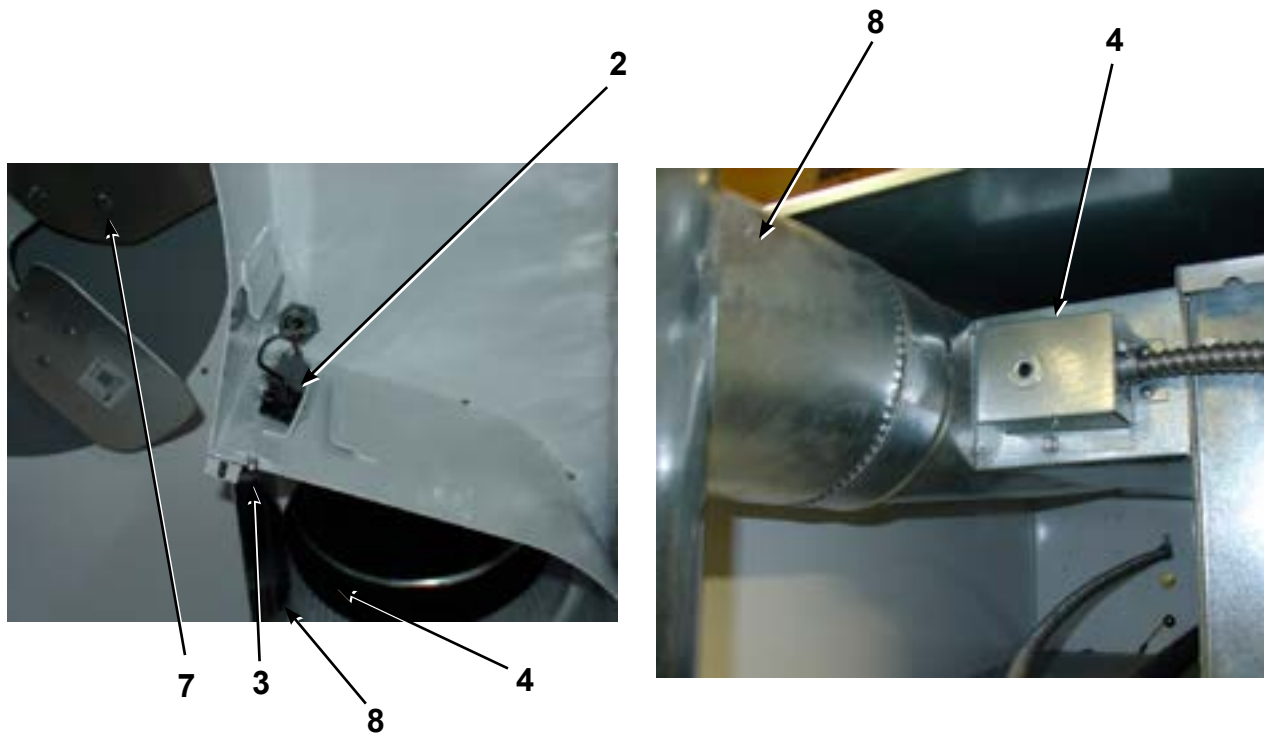

## Blower Impeller and Air Flow Switch Group Over Temperature Switch

| Key | Part Number  | Description                                  | Quantity |
|-----|--------------|--|----------|
| •   | 9074-242-001 | Cover Damper Switch.....                     | 1        |
| 1   | 9125-001-001 | Damper.....                                  | 1        |
| •   | 9545-044-002 | Screw Switch Mtg. ....                       | 2        |
| 2   | 9539-432-001 | Switch Damper .....                          | 1        |
| •   | 8640-411-003 | Nut Switch Locking .....                     | 1        |
| •   | 8640-420-001 | Nut Twin.....                                | 1        |
| 3   | 9451-146-001 | Pin Damper.....                              | 1        |
| 4   | 9825-057-002 | Over-tempcoverass'y .....                    | 1        |
| •   | 9576-207-006 | Thermostatover-tempMnl.....                  | 1        |
| •   | 9545-045-008 | Screw 10B x 3/8.....                         | 2        |
| •   | 9486-137-001 | Retainer pushon .....                        | 1        |
| •   | 9535-050-003 | Sleeve-Hi-Limitswitcaccess .....             | 1        |
| 5   | 9822-027-002 | Hood Ass'y, Lint .....                       | 1        |
| •   | 8640-412-004 | Lint Hood Mtg. ....                          | 6        |
| 6   | 9822-026-001 | Lint Screen.....                             | 1        |
| 7   | 9278-037-002 | Impeller, w/set screws.....                  | 1        |
| •   | 9545-028-013 | Set Screw.....                               | 2        |
| 8   | 9918-002-002 | Recirculation Boot.....                      | 1        |
| *   | 9973-034-001 | 8" Slide Open Clean Out Duct (Optional)..... | 1        |

\* Not Illustrated

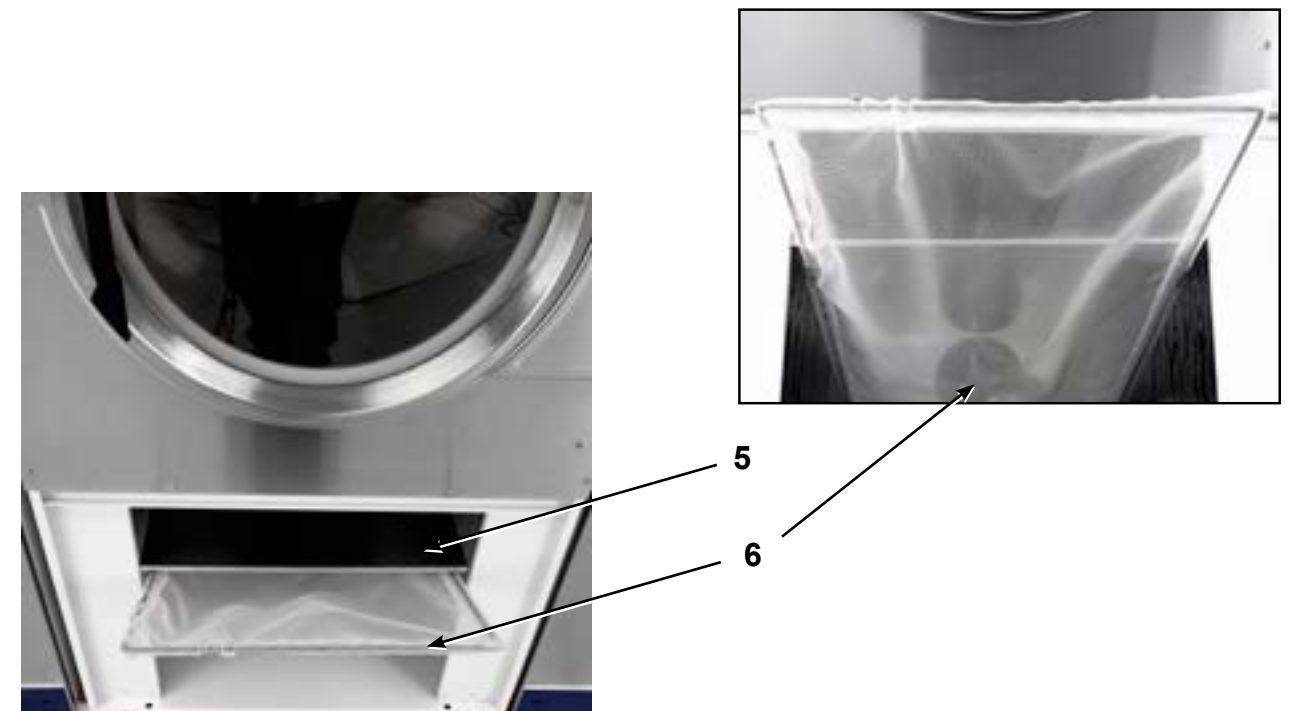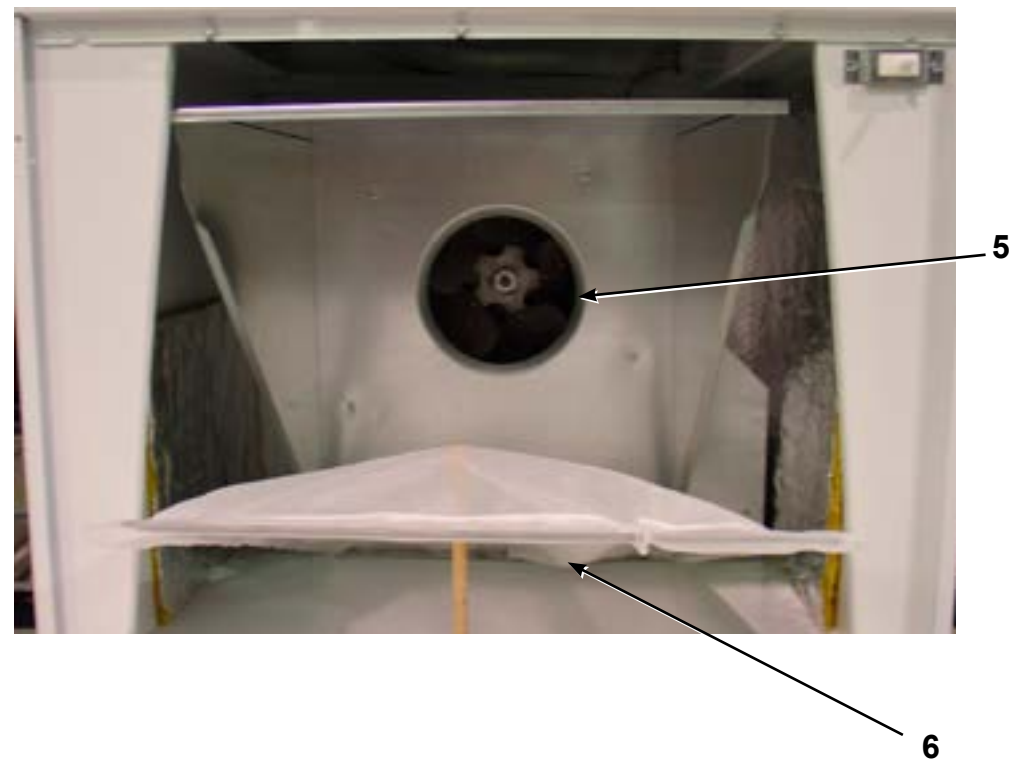

## Wire & Harness Group

| Key | Part Number  | Description   | Qty |
|-----|--------------|---|-----|
|     | 9627-651-002 | Harness, Control.....   | 1   |
|     | 9627-679-002 | Wire Harness, Temp Sensor.....                                    | 1   |
|     | 8640-276-005 | Nut, Wire connector 71B, BLK.....                                 | 2   |
|     | 9627-650-001 | Harness Assembly, Low Voltage.....                                | 1   |
|     | 9631-403-001 | Wire Assy, High Voltage (From Ignition Control).....              | 1   |
|     | 9054-045-001 | Fuse Holder .....   | 1   |
|     | 8636-018-001 | Fuse, 1.5 Amp.....  | 1   |
|     | 9897-032-002 | Terminal Block, Rear Control Box.....                             | 1   |
|     | 8220-064-044 | Wire Assy, BLK 58", Power Terminal Block to Block.....            | 1   |
|     | 8220-064-041 | Wire Assy, WHT 58 1/2", Power Terminal Block to Block .....       | 1   |
|     | 8220-101-022 | Wire Assy, WHT 62", Terminal Block to Motor .....                 | 1   |
|     | 8220-101-021 | Wire Assy, RED 62", Terminal Block to Motor.....                  | 1   |
|     | 8220-057-034 | Wire Assy, BLU 62", Terminal Block to Motor .....                 | 1   |
|     | 8220-064-046 | Wire Assy, BRN 70", Terminal Block to Air Flow Switch .....       | 1   |
|     | 8220-064-045 | Wire Assy, ORG 67", Terminal Block to Air Flow Switch.....        | 1   |
|     | 8220-064-042 | Wire Assy, GRY 57", Terminal Block to Terminal Block .....        | 1   |
|     | 8220-101-025 | Wire Assy, GRY 25 1/2", Terminal Block to Over Temp Switch....    | 1   |
|     | 8220-101-026 | Wire Assy, ORG 27", Terminal Block to Over Temp Switch .....      | 1   |
|     | 8220-101-024 | Wire Assy, BRN 29 1/2", Terminal Block to High Limit Switch ..... | 1   |
|     | 8220-101-027 | Wire Assy, BLU 28", Terminal Block To High Limit Switch .....     | 1   |
|     | 8220-064-043 | Wire Assy, RED 78 1/2", Terminal Block To Control Board.....      | 1   |
|     | 8220-001-225 | Wire Assy, RED 9" Transformer to Fuse Holder .....                | 1   |
|     | 8220-127-001 | Wire Assy, Black 48" Terminal Block to Door Switch .....          | 1   |
|     | 8220-127-002 | Wire Assy, Blue 65" Terminal Block to Door Switch.....            | 1   |
|     | 8653-039-000 | Connector-Wire, Line 1/4" .....                                   | 1   |
|     | 8711-002-001 | Transformer, Control 120/24 VAC.....                              | 1   |


## Label Group

| Key | Part Number  | Description                                 | Qty |
|-----|--------------|---|-----|
|     | 8507-256-001 | Instructions, Uncrating.....                | 1   |
|     | 8514-003-010 | Owner's Booklet.....                        | 1   |
|     | 8507-350-001 | Instructions, Dryer Install / Start Up..... | 1   |
|     | 8507-330-001 | Instructions TVSS.....                      | 1   |
|     | 9506-047-002 | Wiring Schematic.....                       | 1   |
|     | 9506-048-002 | Wiring Diagram .....                        | 1   |
|     | 8511-001-002 | Label, Quality.....                         | 1   |
|     | 8527-105-001 | Label, Decal Lighting and Clearance.....    | 1   |
|     | 8502-645-001 | Label Instructions.....                     | 1   |
|     | 8502-600-001 | Label, Warning and Notice .....             | 1   |
|     | 8502-640-004 | Label, Instructions.....                    | 1   |

## Label With Electronic Coin Acceptor Parts


| Key | Part Number  | Description   | Qty |
|-----|--------------|---|-----|
|     | 8220-001-338 | Wire Assembly-6" BLU, Transformer to Terminal Block ..... | 1   |
|     | 8502-725-001 | LABEL-INSTRUCT/WARN,ELECTRCOIN.....                       | 1   |
|     | 8502-730-001 | LABEL-WARNING,ELECCOINACCEPTOR .....                      | 1   |
|     | 8640-411-002 | NUT-ELASTICSTOP,#6-32 .....                               | 2   |
|     | 8640-424-002 | NUT-HEXELASTICSTOP,#4-40 .....                            | 3   |
|     | 8711-003-001 | TRANSFORMER-120/12VAC .....                               | 1   |
|     | 9021-014-002 | ACCEPTOR-COIN,ELECTRONIC(108).....                        | 1   |
|     | 9452-724-001 | PLATE-MOUNTING,COMPUTERCONTROL .....                      | 1   |
|     | 9506-072-002 | WIRINGLABEL-SCHEMATIC.....                                | 1   |
|     | 9506-073-002 | WIRINGLABEL-DIAGRAM.....                                  | 1   |
|     | 9531-040-002 | STUD-SELFCLINCHING,#4-40X3/8 .....                        | 3   |
|     | 9545-044-006 | SCREW-PNHDCR,#6-32X5/16 .....                             | 2   |
|     | 9627-651-003 | WIRINGHARNESSELECTRONICCNTRL .....                        | 1   |
|     | 9982-334-002 | PLATEASY-CONTROLSMNTNG(CMPTR).....                        | 1   |



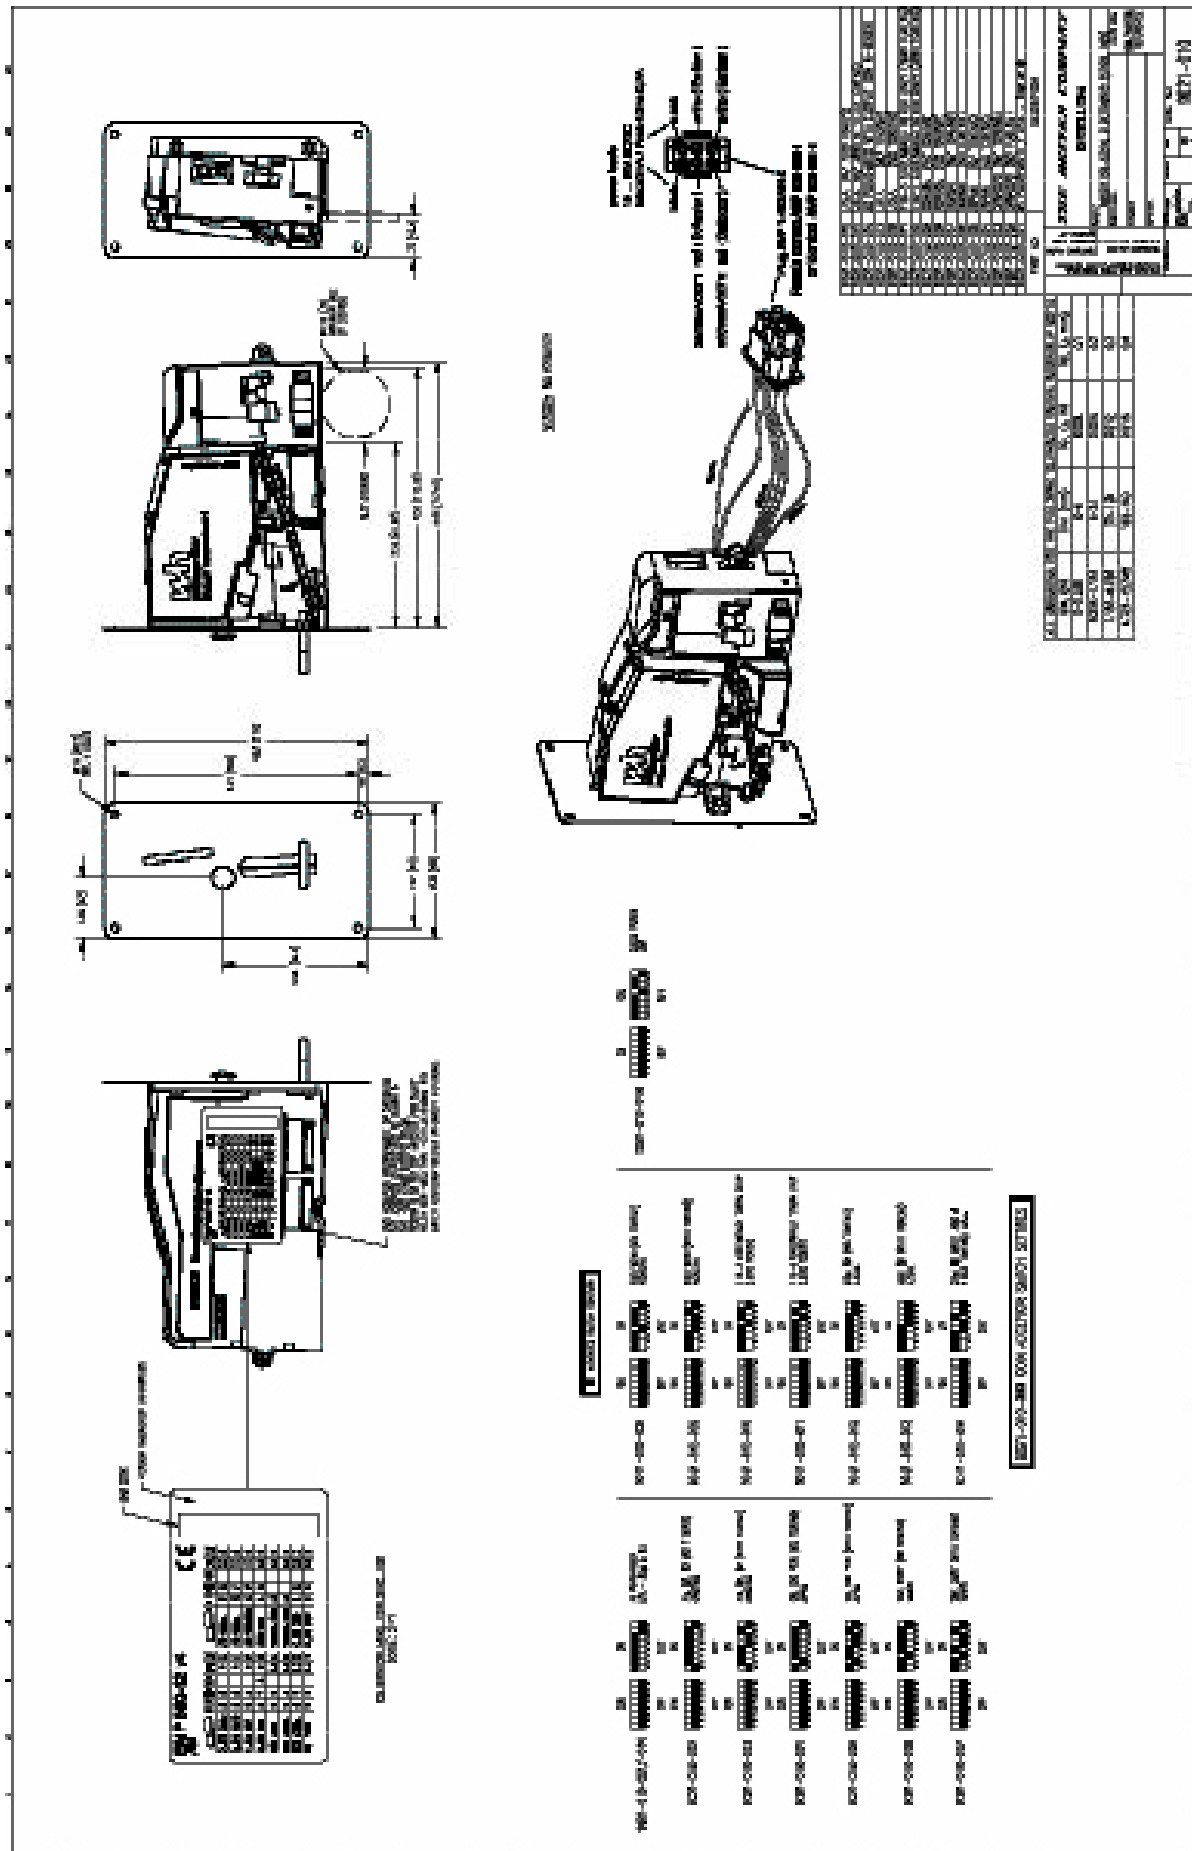

### EC Models (Intergrated EasyCard Ready Parts)

| Key | Part Number  | Description                         | Qty |
|-----|--------------|-------------------------------------|-----|
|     | 8502-728-001 | LABEL-INSTRUCTIONS/WARNING,EC.....  | 1   |
|     | 8640-412-005 | NUT-HEXKEPS,#8-32.....              | 2   |
|     | 8640-424-002 | NUT-HEXELASTICSTOP,#4-40.....       | 3   |
|     | 9982-335-002 | PLATE-CONTROLSMTG,COMPUTER(EC)..... | 1   |
|     | 9982-337-001 | PLATE-READERMOUNTING(ECREADY).....  | 1   |
|     | 9454-569-021 | Front Panel, Almond - EC.....       | 1   |
|     | 9454-569-019 | Front Panel, White - EC.....        | 1   |
|     | 9454-569-020 | PANEL-FRONT,STAINLESSSTEEL.....     | 1   |
|     | 9506-144-002 | WIRINGLABEL-SCHEMATIC.....          | 1   |
|     | 9506-145-002 | WIRINGLABEL-DIAGRAM.....            | 1   |
|     | 9545-008-026 | SCREW-HXWSHRHDUNDCT,#10BX1/2.....   | 2   |
|     | 9627-731-001 | HARNES-KIT,DEXTER.....              | 1   |
|     | 9797-006-003 | CARDREADERASY-DEXTER,STANDARD.....  | 1   |
|     | 9806-013-003 | CABLEASY-4TWISTPR,20'SHLD/UNSH..... | 1   |

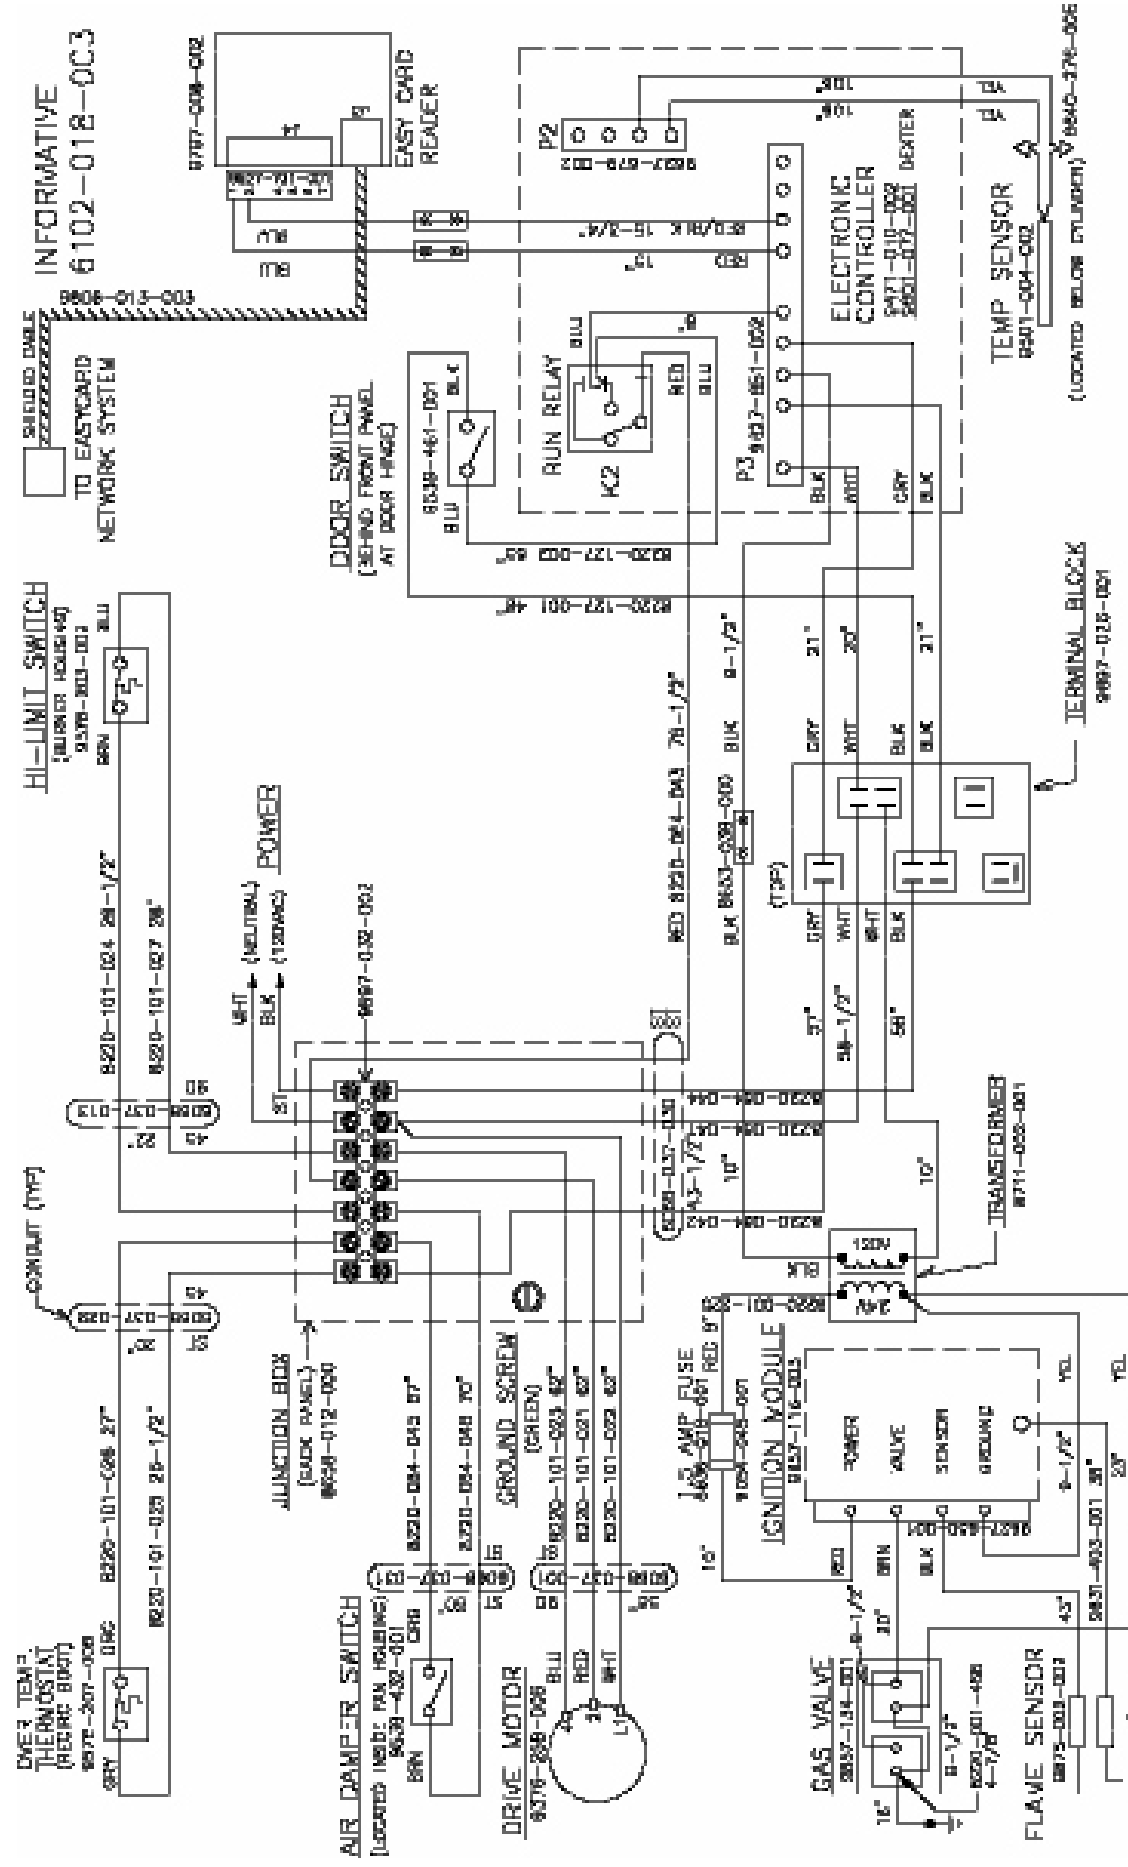


SPARK ELECTRODE 9506-145-002

WIRING DIAGRAM

DCT\_30KC\_10EC 60HZ

NOTES:

1. GUY SWITCH-NO-CLOSED WHEN GUY INDICATOR.
2. DOOR SWITCH-NO-CLOSED WHEN DOOR IS CLOSED.
3. MOTOR RUN RELAY CONTACT WILL CLOSE WHEN THE GUY COUNT IS SATISFIED.THE DOOR CLOSURE AND THE START MOTOR PROCEED.
4. OPERATIONAL SWITCH-CONTACT CLOSURE POSITION WHEN MOTOR IS UP TO SPEED.
5. REFER TO DRAWING'S MANUAL FOR DESCRIPTION OF OPERATIONAL REQUIREMENTS FOR HEATING CIRCUIT.

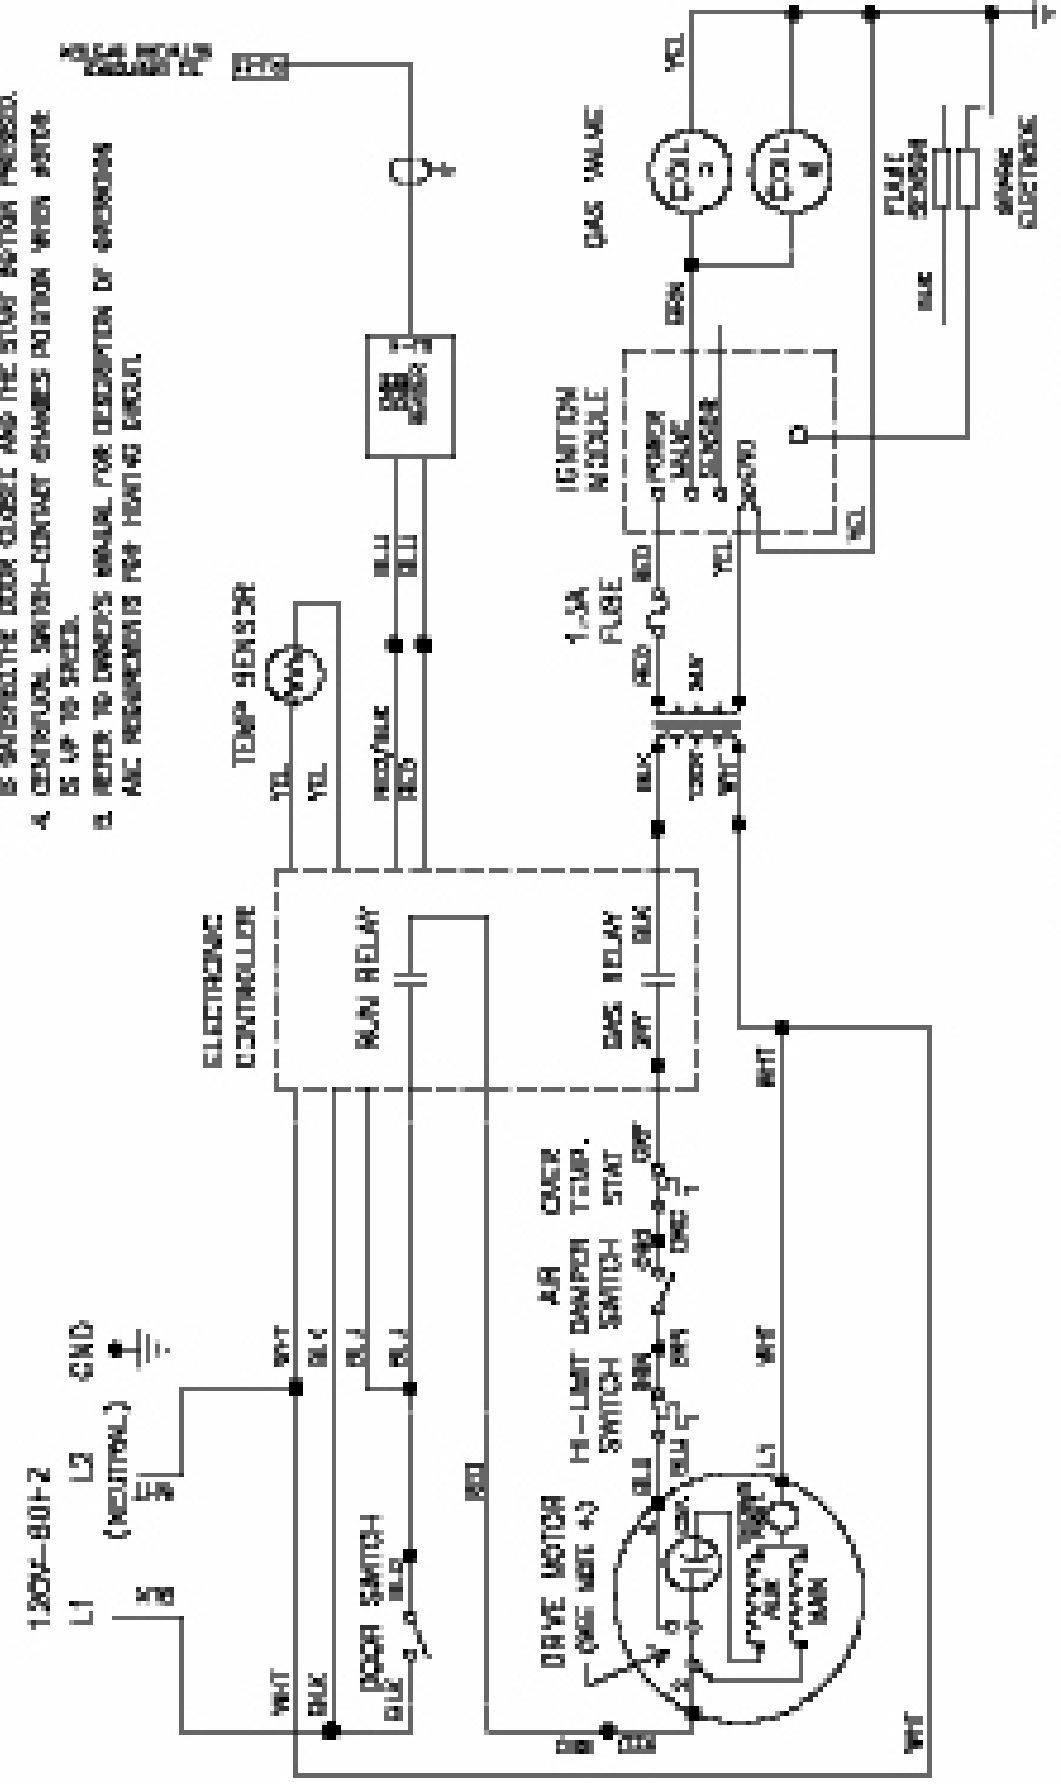

9506-144-002


SCHEMATIC

DCT\_30KC\_10EC

## EC Models (Intergrated EasyCard Ready Parts)

| Key | Part Number  | Description                           | Qty |
|-----|--------------|---------------------------------------|-----|
|     | 5192-286-015 | Relay .....                           | 1   |
|     | 8220-001-198 | Wireasy- Wht, 46 1/2" .....           | 1   |
|     | 8220-001-199 | Wireasy- Wht, 53 1/2" .....           | 1   |
|     | 8220-001-200 | Wireasy- Red, 53 1/2" .....           | 1   |
|     | 8220-001-219 | Wireasy- Blk, 56" .....               | 1   |
|     | 8220-001-220 | Wireasy- Red, 56" .....               | 1   |
|     | 8220-001-227 | Wireasy- Blk, 25 1/2" .....           | 1   |
|     | 8220-001-230 | Wireasy- Blk/Red, 8 1/2" .....        | 1   |
|     | 8220-001-231 | Wireasy- Blk/Blu .....                | 1   |
|     | 8220-001-282 | Wireasy- Red, 20" .....               | 1   |
|     | 8220-001-290 | Wireasy- Blk .....                    | 1   |
|     | 8220-001-412 | Wireasy- Blu, 20" .....               | 1   |
|     | 8220-001-462 | Wireasy- Vio, 58" .....               | 2   |
|     | 8220-001-478 | Wireasy- Grn, 7" .....                | 1   |
|     | 8220-001-479 | Wireasy- Blu, 45" .....               | 1   |
|     | 8220-001-480 | Wireasy- Blk, 45" .....               | 1   |
|     | 8220-001-530 | Wireasy- Blk, 67" .....               | 1   |
|     | 8220-001-531 | Wireasy- Wht, 12"-4" .....            | 1   |
|     | 8220-034-001 | Wireasy-Brn,67" .....                 | 1   |
|     | 8220-034-002 | Wireasy-Blu,461/2" .....              | 1   |
|     | 8220-062-002 | Wireasy- Blk, 11" .....               | 2   |
|     | 8220-063-004 | Wireasy- Blk, 48" .....               | 1   |
|     | 8220-065-006 | Wireasy- Blk/Red, 11" .....           | 1   |
|     | 8220-065-007 | Wireasy- Blk/Blu, 11" .....           | 1   |
|     | 8220-068-002 | Wireasy- Blk/Red, 7" .....            | 1   |
|     | 8220-068-003 | Wireasy- Blk/Blu, 5" .....            | 1   |
|     | 8220-088-001 | Wireasy- Wht, 8" .....                | 1   |
|     | 8220-088-002 | Wireasy- Blk, 5" .....                | 1   |
|     | 8220-088-003 | Wireasy- Red, 8" .....                | 2   |
|     | 8220-097-001 | Wireasy- JUmper, Brn .....            | 1   |
|     | 8220-098-003 | Wireasy- Jumper, Yel .....            | 1   |
|     | 8220-101-001 | Wireasy- Gry,251/2" .....             | 1   |
|     | 8220-101-014 | Wireasy- Vio,42" .....                | 1   |
|     | 8220-101-016 | Wireasy- Brn,411/2" .....             | 1   |
|     | 8507-230-003 | Instructions-Transform Connect .....  | 1   |
|     | 8507-349-001 | Instruction-Switches, Electacpt ..... | 1   |
|     | 8514-003-012 | Booklet-Owners 30# Dryers 9/07 .....  | 1   |
|     | 8615-104-040 | Reducer-1/2x3/4 .....                 | 1   |
|     | 8640-276-003 | Nut-Wireconn, #73b, Org .....         | 10  |
|     | 8640-424-002 | Nut-Hexelasticstop, #4-40 .....       | 3   |
|     | 8711-008-002 | Transformer-Control .....             | 1   |
|     | 9000-043-001 | Adapter-3/4usto3/4iso .....           | 1   |
|     | 9021-015-002 | Acceptor-CoiN, Electronic (109) ..... | 1   |
|     | 9029-091-001 | Bracket-Control Box .....             | 1   |
|     | 9074-263-002 | Cover-Ignition Control Box .....      | 1   |
|     | 9183-030-001 | Filter-Line,Emi .....                 | 1   |
|     | 9208-039-001 | Guard-Drive .....                     | 1   |
|     | 9248-022-002 | Hook-Stype .....                      | 1   |
|     | 9376-259-008 | Motor-Dryer,A.O.Smith (30#) .....     | 1   |
|     | 9381-009-005 | Manifold Assembly-(2) Port .....      | 1   |
|     | 9452-671-001 | Plate-Bracket Extender .....          | 1   |
|     | 9452-724-001 | Plate-Mounting,Computer Control ..... | 1   |
|     | 9453-169-009 | Pulley-Drive, Machined .....          | 1   |
|     | 9454-696-001 | Panel-Shield, Motor, Lh .....         | 1   |

|              |  |   |
|--------------|--|---|
| 9454-697-001 | Panel-Shield ,Motor, Rh .....                | 1 |
| 9471-011-002 | Printed Circuit BOard Assembly .....         | 1 |
| 9506-204-001 | Wiring Label- Schematic .....                | 1 |
| 9506-204-002 | Wiring Label- Schematic .....                | 1 |
| 9506-205-001 | Wiring Label-Diagram .....                   | 1 |
| 9506-205-002 | Wiring Label-Diagram .....                   | 1 |
| 9539-461-007 | Switch-Micro .....                           | 1 |
| 9545-008-027 | Screw-HxwsrhdsLtd, #10-32 Ttx 1/2 .....      | 1 |
| 9627-651-003 | Wiring Harness- Electronic Cntrl .....       | 1 |
| 9631-382-002 | Wireasy-Gry, 45 1/2" .....                   | 1 |
| 9631-403-005 | Wireasy-High Voltage .....                   | 1 |
| 9732-162-001 | Kit-Honeywellvr 86 Valve Flange .....        | 2 |
| 9791-001-002 | Adapter Assembly- Gas Inlet .....            | 1 |
| 9804-021-001 | Shield Assembly- Motor .....                 | 1 |
| 9807-080-001 | Box Assembly- Control .....                  | 1 |
| 9857-132-004 | Control Assembly- Gas .....                  | 1 |
| 9857-140-001 | Control Assembly- Fenwal .....               | 1 |
| 9857-166-001 | Control Assembly .....                       | 1 |
| 9897-036-001 | Terminal Block Assembly- Power .....         | 1 |
| 9982-334-002 | Plate Assembly - Controls Mntng(Cmptr) ..... | 1 |

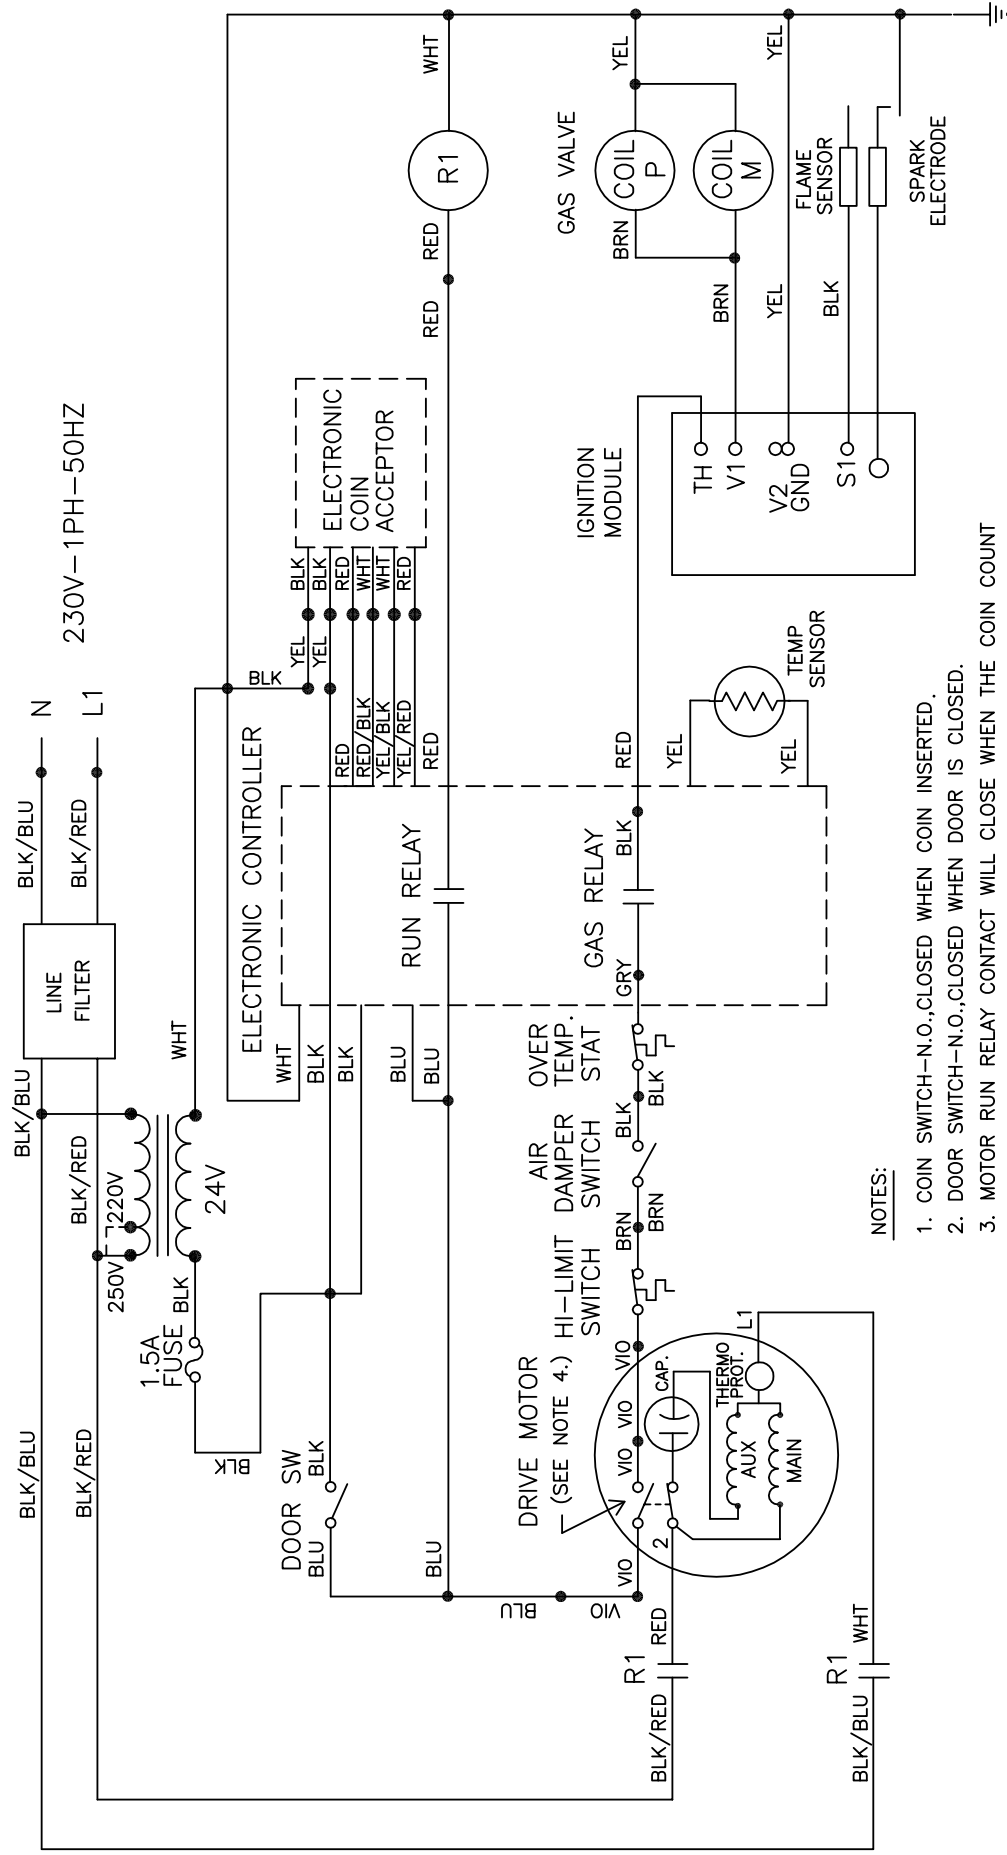


NOTES:

1. COIN SWITCH--N.O.,CLOSED WHEN COIN INSERTED.
2. DOOR SWITCH--N.O.,CLOSED WHEN DOOR IS CLOSED.
3. MOTOR RUN RELAY CONTACT WILL CLOSE WHEN THE COIN COUNT IS SATISFIED,THE DOOR CLOSED AND THE START BUTTON PRESSED.
4. CENTRIFUGAL SWITCH--CONTACTS CHANGE POSITION WHEN MOTOR IS UP TO SPEED.
5. REFER TO OWNER'S MANUAL FOR DESCRIPTION OF OPERATION AND REQUIREMENTS FOR HEATING CIRCUIT.

9506-204-002A

SCHEMATIC

DCT\_30KC\_59CR

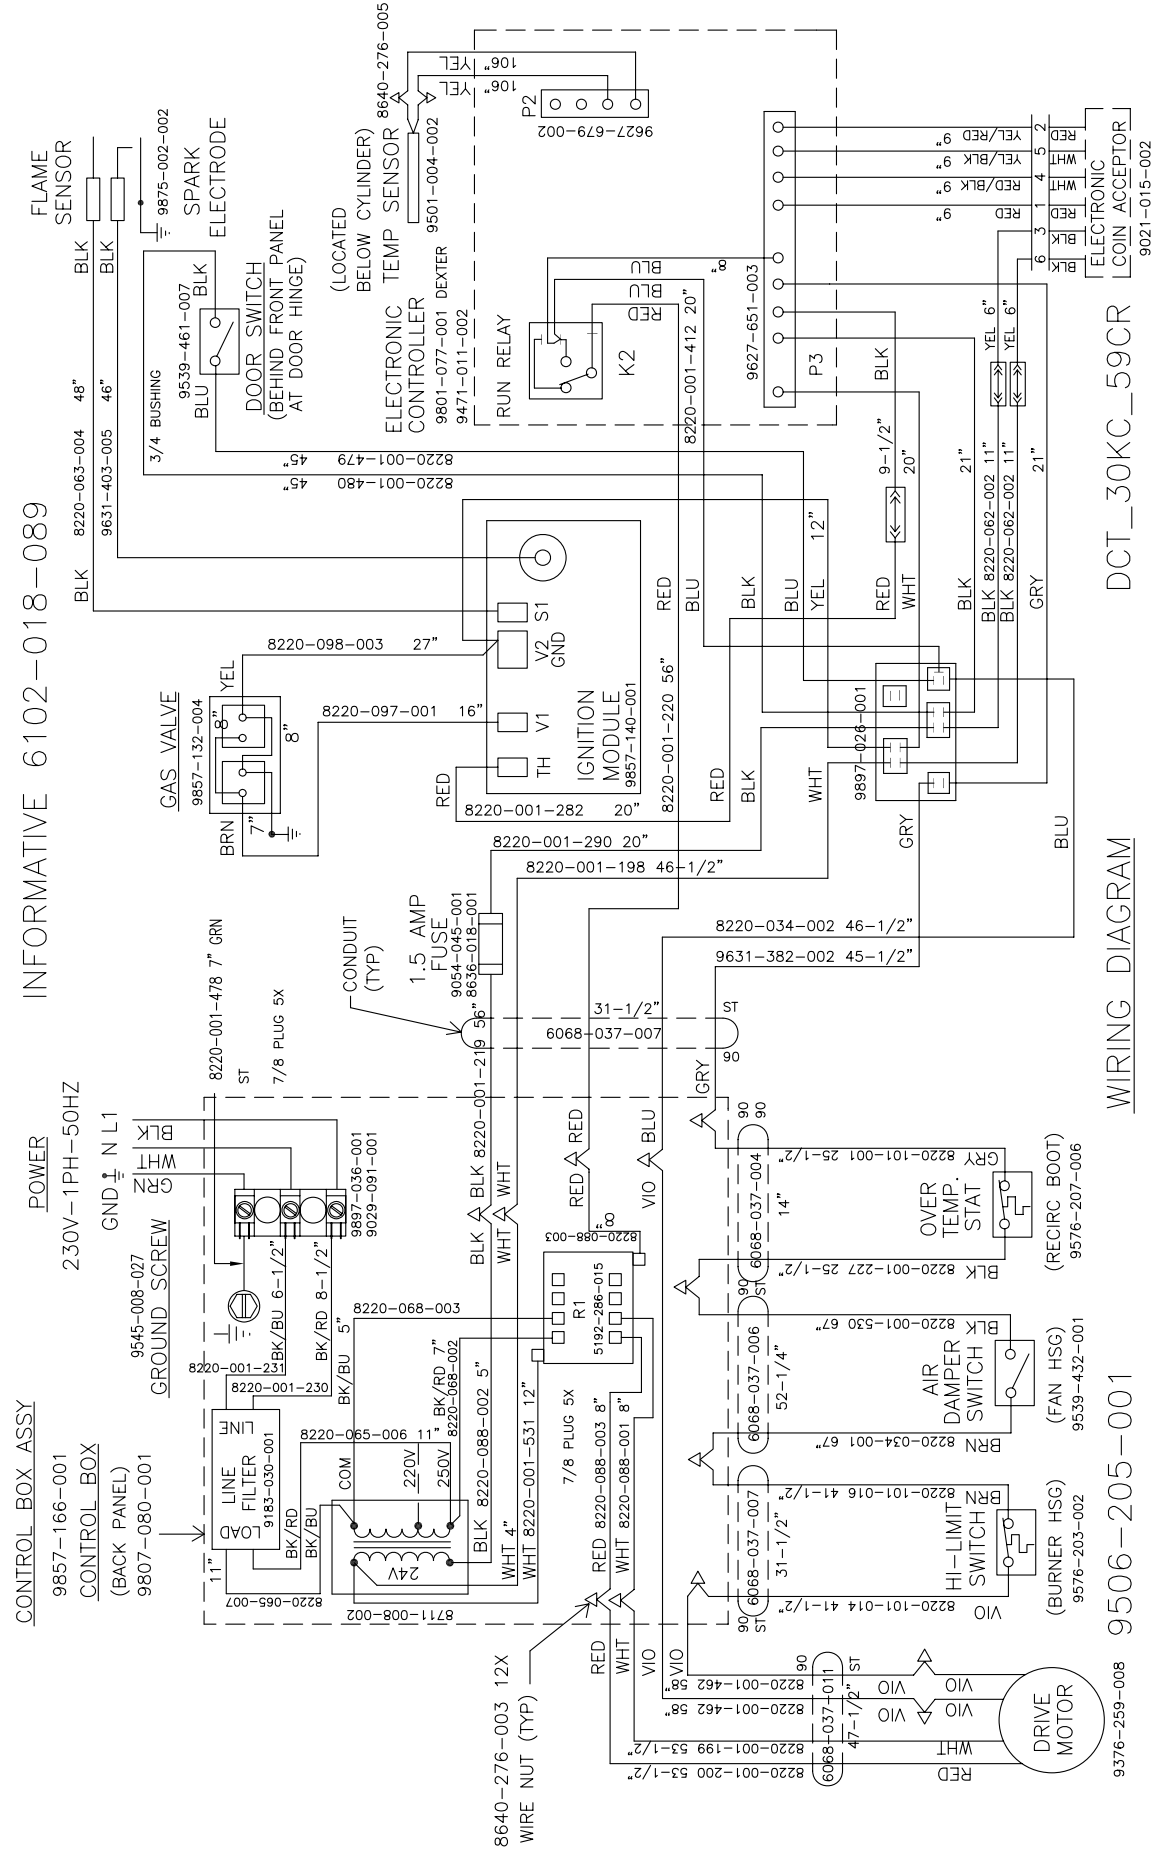

9506-205-001

WIRING DIAGRAM

DCT\_30KC\_59CR


## 21CR Gas Heated Parts

| Key | Part Number  | Description                             | Qty |
|-----|--------------|---|-----|
|     | 5192-288-001 | Relay .....                             | 1   |
|     | 8502-698-001 | Label-Aussie warning .....              | 1   |
|     | 8502-699-001 | Label-Aust gas approval badge .....     | 1   |
|     | 8502-725-001 | Label-Instruct/Warn, Electr coin .....  | 1   |
|     | 8502-730-001 | Label-Warning, Elec coin acceptor ..... | 1   |
|     | 8507-230-003 | Instructions-Transform connect .....    | 1   |
|     | 8507-298-001 | Instructions-Aussie addendum .....      | 1   |
|     | 8640-276-003 | Nut-Wireconn,#73b,Org .....             | 13  |
|     | 8711-008-002 | Transformer-Control .....               | 1   |
|     | 9021-015-002 | Acceptor-Coin, Electronic(109) .....    | 1   |
|     | 9074-263-001 | Cover-Ignition control box .....        | 1   |
|     | 9183-030-001 | Filter-Line, Emi .....                  | 1   |
|     | 9208-039-001 | Guard-Drive .....                       | 1   |
|     | 9248-022-002 | Hook-Stype .....                        | 1   |
|     | 9376-259-008 | Motor-Dryer,A.O.Smith(30#) .....        | 1   |
|     | 9381-009-005 | Manifold assembly-(2)Port .....         | 1   |
|     | 9435-016-001 | Overlay-Trim, Lwr serv door,30# .....   | 1   |
|     | 9452-671-001 | Plate-Bracket extender .....            | 1   |
|     | 9452-724-001 | Plate-Mounting, Computer control .....  | 1   |
|     | 9453-169-009 | Pulley-Drive, Machined .....            | 1   |
|     | 9454-644-001 | Panel-Control box, Top .....            | 2   |
|     | 9454-696-001 | Panel-Shield, Motor, Lh .....           | 1   |
|     | 9454-697-001 | Panel-Shield, Motor, Rh .....           | 1   |
|     | 9456-041-006 | Plug-Plastic,7/8" .....                 | 7   |
|     | 9471-011-002 | Printed circuit board assembly .....    | 1   |
|     | 9506-074-002 | Wiringlabel-Schematic .....             | 1   |
|     | 9506-075-002 | Wiringlabel-Diagram .....               | 1   |
|     | 9578-087-001 | Trim-Door, Lower service .....          | 1   |
|     | 9627-651-003 | Wiring harness-Electronic control ..... | 1   |
|     | 9631-381-018 | Wire assembly-Red,7" .....              | 1   |
|     | 9631-382-002 | Wire assembly-Gry,45 1/2" .....         | 1   |
|     | 9732-162-001 | Kit-Honey wellvr 86 valve flange .....  | 2   |
|     | 9804-021-001 | Shield assembly-Motor .....             | 1   |
|     | 9807-080-001 | Box asy- Control .....                  | 1   |
|     | 9857-129-001 | Controls asy-Ignition, Johnson .....    | 1   |
|     | 9857-131-001 | Control asy .....                       | 1   |
|     | 9857-132-004 | Control assembly-Gas .....              | 1   |
|     | 9982-334-001 | Plateasy-Controls mntng(Cmptr) .....    | 1   |
|     | 9982-334-002 | Plateasy-Controls mntng(Cmptr) .....    | 1   |
|     | 8220-001-198 | Wire assembly-Wht,46 1/2" .....         | 1   |
|     | 8220-001-199 | Wire assembly-Wht,53 1/2" .....         | 1   |
|     | 8220-001-200 | Wire assembly-Red,53 1/2" .....         | 1   |
|     | 8220-001-219 | Wire assembly-Blk,56" .....             | 1   |
|     | 8220-001-220 | Wire assembly-Red,56" .....             | 1   |
|     | 8220-001-221 | Wire assembly-Blk,45" .....             | 1   |
|     | 8220-001-222 | Wire assembly-Blu,45" .....             | 1   |
|     | 8220-001-227 | Wire assembly-Blk,25 1/2" .....         | 1   |
|     | 8220-001-282 | Wire assembly-Red,20" .....             | 1   |
|     | 8220-001-332 | Wire assembly-Blk .....                 | 1   |
|     | 8220-001-333 | Wire assembly-Wht .....                 | 1   |
|     | 8220-001-411 | Wire assembly-Red,9" .....              | 2   |
|     | 8220-001-412 | Wire assembly-Blu,20" .....             | 1   |
|     | 8220-001-530 | Wire assembly-Blk,67" .....             | 1   |
|     | 8220-034-001 | Wire assembly-Brn,67" .....             | 1   |
|     | 8220-034-002 | Wire assembly-Blu,46 1/2" .....         | 1   |
|     | 8220-057-020 | Wire assembly-Blu,54" .....             | 2   |
|     | 8220-062-002 | Wire assembly-Blk,11" .....             | 2   |

|              |                                 |   |
|--------------|---------------------------------|---|
| 8220-062-024 | Wire assembly-Wht,19" .....     | 1 |
| 8220-063-004 | Wire assembly-Blk,48" .....     | 1 |
| 8220-064-025 | Wire assembly-Wht,9" .....      | 2 |
| 8220-088-013 | Wire assembly-Blk,6" .....      | 1 |
| 8220-090-002 | Wire assembly-Jumper,Brn .....  | 1 |
| 8220-098-001 | Wire assembly-Jumper,Yel .....  | 1 |
| 8220-100-002 | Wire assembly-Jumper .....      | 1 |
| 8220-101-001 | Wire assembly-Gry,25 1/2" ..... | 1 |
| 8220-101-003 | Wire assembly-Blu,41 1/2" ..... | 1 |
| 8220-101-016 | Wire assembly-Brn,41 1/2" ..... | 1 |
| 8220-107-001 | Wire assembly-Jumper,Wht .....  | 2 |





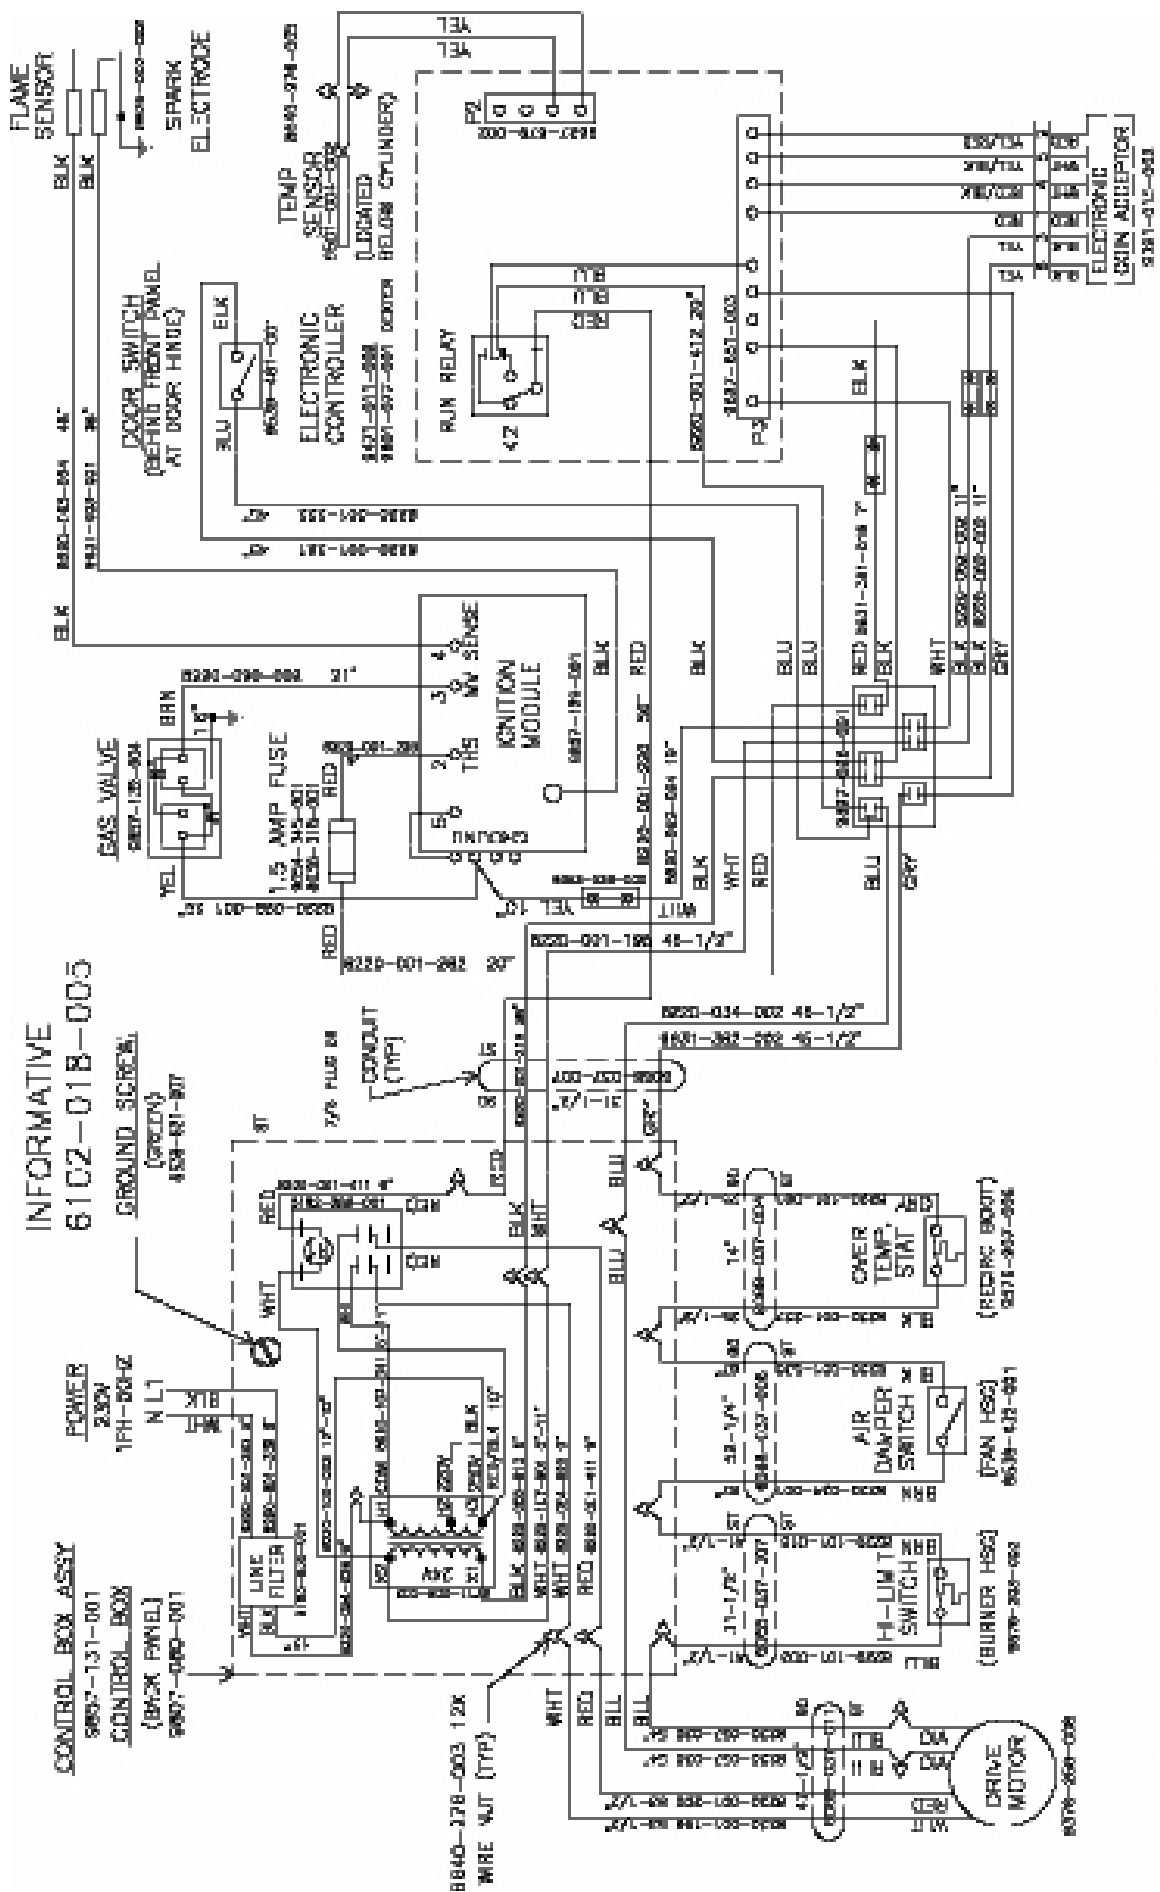

WIRING DIAGRAM

9506-075-0C2

DCT\_30KC\_21CR\_50HZ\_AL

### 16FE Electric Heated Parts List

| Key | Part Number  | Description                            | Qty   |
|-----|--------------|--|-------|
|     | 5192-294-001 | Relay-125 amp (Resistive) Contact..... | 1     |
|     | 5198-213-004 | Circuit breaker-3 pole.....            | 2     |
|     | 8220-057-004 | Wire assembly-Brn,30".....             | 1     |
|     | 8220-057-007 | Wire assembly-Wht/Blk,45".....         | 1     |
|     | 8220-057-008 | Wire assembly-Blk,45".....             | 1     |
|     | 8220-057-014 | Wire assembly-Blk,8".....              | 3     |
|     | 8220-057-015 | Wire assembly-Blk,8".....              | 6     |
|     | 8220-057-019 | Wire assembly-Wht,8".....              | 1     |
|     | 8220-061-008 | Wire assembly-Blk,36".....             | 4     |
|     | 8220-061-010 | Wire assembly-Blk,48".....             | 2     |
|     | 8220-064-021 | Wire assembly-Blk/Wht,90".....         | 1     |
|     | 8220-095-025 | Wire assembly-Red,31".....             | 1     |
|     | 8220-101-002 | Wire assembly-Blk,64".....             | 1     |
|     | 8220-101-005 | Wire assembly-Gry,64".....             | 1     |
|     | 8220-101-015 | Wire assembly-Brn,30".....             | 1     |
|     | 8502-614-004 | Label-Warning,High voltage.....        | 1     |
|     | 8502-639-001 | Label-Warning.....                     | 1     |
|     | 8502-658-001 | Label-Warning,Fire hazard.....         | 1     |
|     | 8502-702-001 | Label-Warn,Fire hazard (French).....   | 1     |
|     | 8502-708-001 | Label-Exhaust warning.....             | 1     |
|     | 8502-711-001 | Label-Warning for 208v.....            | 1     |
|     | 8514-106-001 | Booklet-Owners, 30# Htd Dryer.....     | 1     |
|     | 8639-621-007 | Screw-Hx wshr hd,#10-32x1/2,Gm.....    | 1     |
|     | 8640-276-003 | Nut-Wire conn,#73b,Org.....            | 1     |
|     | 8652-134-002 | Terminal-Lug, Solderless.....          | 1     |
|     | 8653-068-004 | Connector-Conduit, 90 degree.....      | 5     |
|     | 8653-068-006 | Connector-Conduit, 3/8", 45.....       | 1     |
|     | 9029-127-001 | Bracket-Guard mounting.....            | 1     |
|     | 9058-025-001 | Bottom-Box, Control.....               | 1     |
|     | 9074-288-001 | Cover-Plate, Heater.....               | 1     |
|     | 9074-289-001 | Cover-Box, Control.....                | 1     |
|     | 9074-290-001 | Cover-Housing, Overtemp thermo.....    | 1     |
|     | 9109-108-001 | Duct-Thermostat,Over temp.....         | 1     |
|     | 9142-039-001 | Elbow-90 degree ajd,8".....            | 2     |
|     | 9208-053-001 | Guard-Front,Cabinet cover.....         | 1     |
|     | 9208-058-001 | Guard-Rear,Right hand (Cover).....     | 1     |
|     | 9208-059-001 | Guard-Rear,Left hand (Cover).....      | 1     |
|     | 9241-187-001 | Housing-Thermostat, Overtemp.....      | 1     |
|     | 9295-004-001 | Jumper-Formed.....                     | 2     |
|     | 9295-005-001 | Jumper-Straight.....                   | 4     |
|     | 9377-003-001 | Varistor-Coil suppressor.....          | 1     |
|     | 9488-010-001 | Rail-Din.....                          | 0.396 |
|     | 9488-010-003 | Rail-Din, 43/4".....                   | 1     |
|     | 9506-176-002 | Wiring label-Schematic.....            | 1     |
|     | 9506-177-002 | Wiring label-Diagram.....              | 1     |
|     | 9548-282-001 | Support-Wire.....                      | 2     |
|     | 9870-088-001 | Heater-Electric elem, 15kw, 208v.....  | 2     |
|     | 9897-037-001 | Block-Power, 3 pole.....               | 1     |
|     | 9897-038-001 | Block-Power, 1 pole.....               | 1     |



## 66 FW Electric Heated Parts List

| Key | Part Number  | Description                         | Qty |
|-----|--------------|-------------------------------------|-----|
|     | 5192-285-004 | Relay .....                         | 1   |
|     | 5192-288-001 | Relay .....                         | 1   |
|     | 5192-290-002 | Relay-Heaters,40amp(240vac) .....   | 1   |
|     | 5198-215-002 | Circuitbreaker-3pole,415v .....     | 1   |
|     | 8220-001-199 | Wireasy-Wht,531/2" .....            | 1   |
|     | 8220-001-200 | Wireasy-Red,531/2" .....            | 1   |
|     | 8220-001-221 | Wireasy-Blk,45" .....               | 1   |
|     | 8220-001-222 | Wireasy-Blu,45" .....               | 1   |
|     | 8220-001-290 | Wireasy-Blk .....                   | 1   |
|     | 8220-001-411 | Wireasy-Red,9" .....                | 2   |
|     | 8220-001-412 | Wireasy-Blu,20" .....               | 1   |
|     | 8220-001-530 | Wireasy-Blk,67" .....               | 1   |
|     | 8220-034-001 | Wireasy-Brn,67" .....               | 1   |
|     | 8220-034-002 | Wireasy-Blu,461/2" .....            | 1   |
|     | 8220-057-004 | Wireasy-Brn,30" .....               | 1   |
|     | 8220-057-007 | Wireasy-Wht/Blk,45" .....           | 1   |
|     | 8220-057-008 | Wireasy-Blk,45" .....               | 1   |
|     | 8220-057-011 | Wireasy-Vio,32" .....               | 1   |
|     | 8220-057-015 | Wireasy-Blk,8" .....                | 3   |
|     | 8220-057-019 | Wireasy-Wht,8" .....                | 1   |
|     | 8220-057-020 | Wireasy-Blu,54" .....               | 2   |
|     | 8220-057-030 | Wireasy-Blk,17" .....               | 3   |
|     | 8220-061-008 | Wireasy-Blk,36" .....               | 3   |
|     | 8220-064-025 | Wireasy-Wht,9" .....                | 1   |
|     | 8220-064-051 | Wireasy-Red/Blk,62" .....           | 1   |
|     | 8220-078-008 | Wireasy-Blk,9" .....                | 2   |
|     | 8220-078-011 | Wireasy-Wht,45" .....               | 1   |
|     | 8220-078-012 | Wireasy-Red,45" .....               | 1   |
|     | 8220-088-013 | Wireasy-Blk,6" .....                | 1   |
|     | 8220-101-002 | Wireasy-Blk,64" .....               | 1   |
|     | 8220-101-005 | Wireasy-Gry,64" .....               | 1   |
|     | 8220-101-014 | Wireasy-Vio,42" .....               | 1   |
|     | 8220-101-015 | Wireasy-Brn,30" .....               | 1   |
|     | 8220-107-001 | Wireasy-Jumper,Wht .....            | 2   |
|     | 8220-107-002 | Wireasy-Jumper,Blk .....            | 1   |
|     | 8502-614-004 | Label-Warning,Highvoltage .....     | 1   |
|     | 8502-639-001 | Label-Warning .....                 | 1   |
|     | 8502-658-001 | Label-Warning,Firehazard .....      | 1   |
|     | 8502-698-001 | Label-Aussiewarning .....           | 1   |
|     | 8502-708-001 | Label-Exhaustwarning .....          | 1   |
|     | 8507-230-003 | Instructions-Transformconnect ..... | 1   |
|     | 8507-298-001 | Instructions-Aussieaddendum .....   | 1   |
|     | 8636-018-004 | Fuse-2.5a .....                     | 1   |
|     | 8652-134-002 | Terminal-Lug,Solderless .....       | 1   |
|     | 8653-039-000 | Connector-WiRe,Inline,1/4" .....    | 1   |
|     | 8711-008-002 | Transformer-Control .....           | 1   |
|     | 9021-002-015 | Acceptor-Coin,Complete .....        | 1   |
|     | 9029-127-001 | Bracket-Guardmounting .....         | 1   |
|     | 9058-025-001 | Bottom-Box,Control .....            | 1   |
|     | 9074-263-001 | Cover-Ignitioncontrolbox .....      | 1   |
|     | 9074-288-001 | Cover-Plate,Heater .....            | 1   |
|     | 9074-289-001 | Cover-Box,Control .....             | 1   |
|     | 9074-290-001 | Cover-Housing,Overtempthermo .....  | 1   |
|     | 9109-108-001 | Duct-Thermostat,Overtemp .....      | 1   |
|     | 9142-039-001 | Elbow-90 degree, 8" .....           | 2   |

|              |                                      |       |
|--------------|--------------------------------------|-------|
| 9208-039-001 | Guard-Drive .....                    | 1     |
| 9208-053-001 | Guard-Front,Cabinetcover .....       | 1     |
| 9208-058-001 | Guard-Rear,Righthand(Cover) .....    | 1     |
| 9208-059-001 | Guard-Rear,Lefthand(Cover) .....     | 1     |
| 9210-117-001 | Gusset-Box,Control .....             | 1     |
| 9241-187-001 | Housing-Thermostat,Overtemp .....    | 1     |
| 9248-022-002 | Hook-Stype .....                     | 1     |
| 9295-006-001 | Jumper-Straight,3hole .....          | 1     |
| 9376-259-008 | Motor-Dryer,A.O.Smith(30#) .....     | 1     |
| 9377-003-002 | Varistor-Coilsuppressor .....        | 1     |
| 9435-016-001 | Overlay-Trim,Lwrservdoor,30# .....   | 1     |
| 9452-668-003 | Plate-Controls,Mounting(Cmptr) ..... | 1     |
| 9452-741-001 | Plate-Replacement,Heater .....       | 1     |
| 9453-169-001 | Pulley-Drive-Casting-Manual .....    | 1     |
| 9453-169-009 | Pulley-Drive,Machined .....          | 1     |
| 9454-644-001 | Panel-ControlbOx,Top .....           | 2     |
| 9454-696-001 | Panel-Shield,Motor,Lh .....          | 1     |
| 9454-697-001 | Panel-Shield,Motor,Rh .....          | 1     |
| 9456-041-006 | Plug-Plastic,7/8" .....              | 9     |
| 9471-011-002 | Printedcircuitboardassembly .....    | 1     |
| 9488-010-001 | Rail-Din .....                       | 0.396 |
| 9488-010-003 | Rail-Din,43/4" .....                 | 1     |
| 9506-206-001 | Wiringlabel-Schematic .....          | 1     |
| 9506-206-002 | Wiringlabel-Schematic .....          | 1     |
| 9506-207-001 | Wiringlabel-Diagram .....            | 1     |
| 9506-207-002 | Wiringlabel-Diagram .....            | 1     |
| 9544-041-002 | Strap-Beadedtie .....                | 1     |
| 9548-282-001 | Support-Wire .....                   | 1     |
| 9578-087-001 | Trim-Door,Lowerservice .....         | 1     |
| 9804-021-001 | Shieldassembly-Motor .....           | 1     |
| 9857-163-001 | Controlasy .....                     | 1     |
| 9870-088-002 | Heater-Electricelem,15kw,240v .....  | 1     |
| 9897-037-001 | Block-Power,3pole .....              | 1     |
| 9897-038-001 | Block-Power,1pole .....              | 1     |
| 9982-305-005 | Plateasy-Controls,Mntg(Cmptr) .....  | 1     |
| 9982-305-006 | Plateasy-Controls,Mntg(Cmptr) .....  | 1     |



## Section 7: Maintenance

### Preventative Maintenance

#### Daily

**Step 1:** Clean the lint screen free of lint and other debris. Use a soft brush and Hot water if necessary.

**Step 2:** Check the lint screen for tears. Replace if necessary.

**Step 3:** Clean lint from the lint screen compartment.

**Step 4:** Inspect felt seal on lint screen assembly, replace if needed.

#### Monthly

**Step 1:** Remove lint accumulation from the end bells of the motor.

**Step 2:** Remove lint accumulation from front control area.

**Step 3:** Remove lint and dirt accumulation from the top of the dryer and all areas above, below, and around the burners and burner housing. Failure to keep this portion of the dryer clean can lead to a build-up of lint creating a fire hazard.

**Step 4:** Remove and clean coin acceptors. (Vended Models Only)

#### Quarterly

**Step 1:** Check the belts for looseness, wear, or fraying.

**Step 2:** Inspect the gasket of the door glass for excessive wear.

**Step 3:** Check tightness of all fasteners holding parts to support channel.

**Step 4:** Check tightness of all set screws.

**Step 5:** Remove the air flow switch assembly and check the tumbler thru-bolts for tightness.

**Step 6:** Apply a few drops of oil to pivot pins and the tension arms where in contact with each other.

#### Semi-Annually

**Step 1:** Remove and clean the main burners.

**Step 2:** Remove all orifices and examine for dirt and hole obstruction.

**Step 3:** Remove all lint accumulation. Remove the front panel and the lint screen housing and remove lint accumulation.

#### Annually

**Step 1:** Check the intermediate pulley bearings for wear.

**Step 2:** Check and remove any lint accumulation from the exhaust system including recirculation chambers if applicable.

**Step 3:** Grease the bearings and the shaft of the intermediate pulley. Use an Alemite grease gun and Molykote BR2-S grease. (Where applicable)